


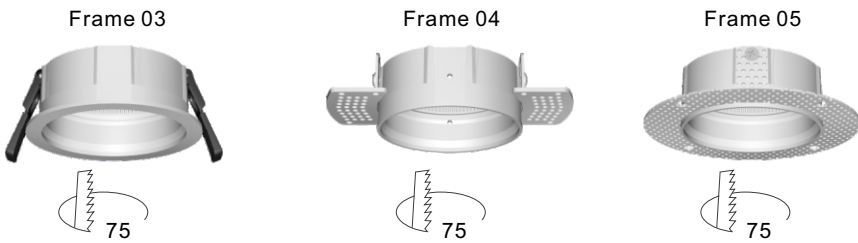
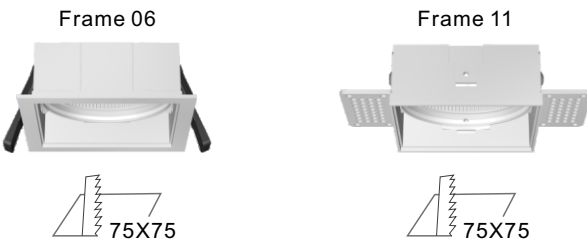



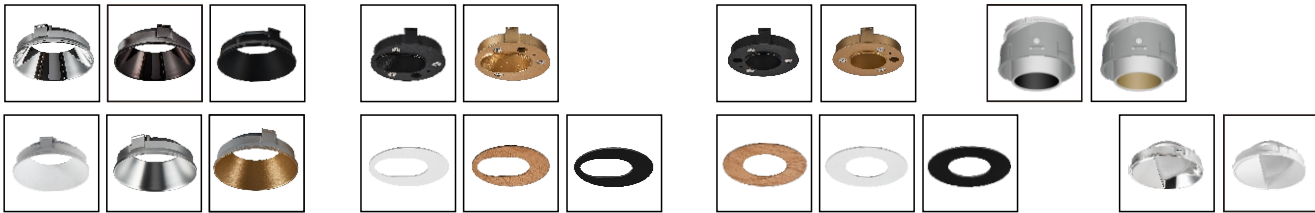

ETERNITY

Multi-configuration spotlight series; Easy for installation and stock;
It provides with power from 6W to 18W with the same cutout size;
Suitable for different applications;

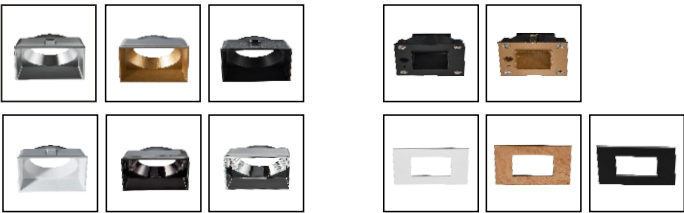

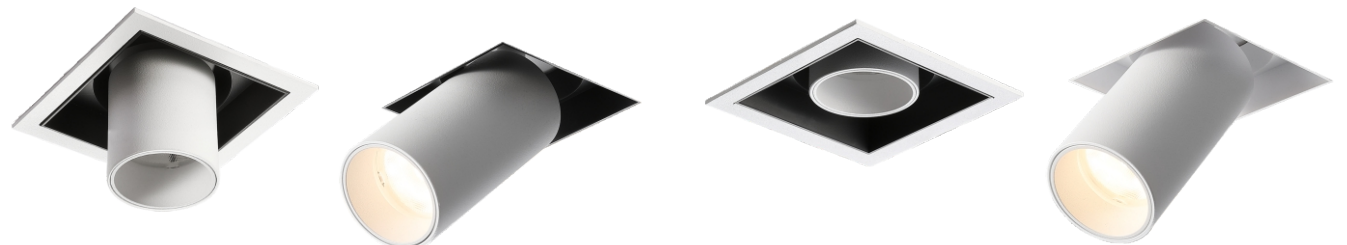



Modular A

Modular B



IP54
Modular C

MR16/GU10



Middle Ring 01

Fixed
Middle Ring 02

Middle Ring 03



Honey comb

Spread Lens

Solite Lens



Modular D



Frame 07



Frame 08



Frame 10




Frame 13




Frame 09




Frame 12




75X145




75X218




145X145



145X145



75X290



75X145



Reflector 03



Reflector 03



Reflector 04



Reflector 04



Reflector 03







Reflector 04



Reflector 05



Reflector 05

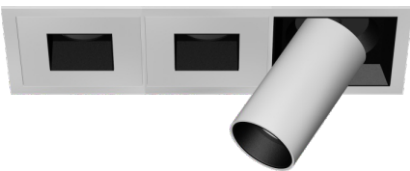







Code No.:DL201-A


Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

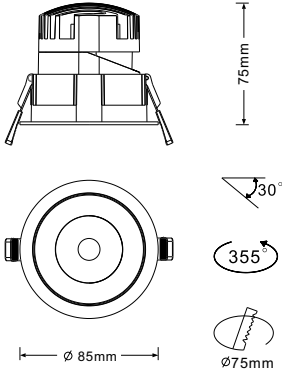

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

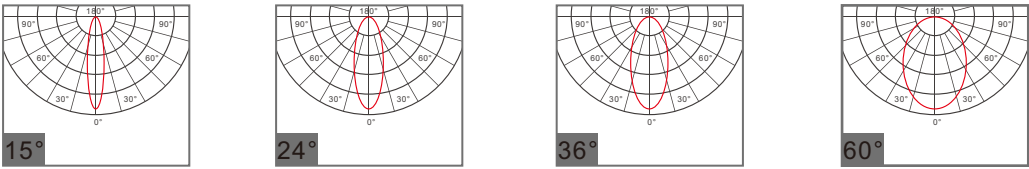


Code No.:DL201-B


Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

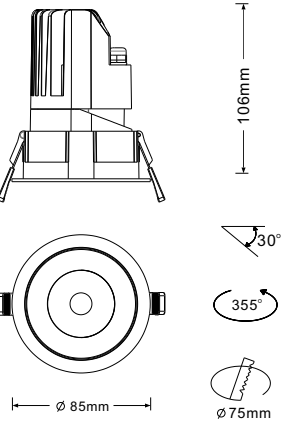

Reflector





Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

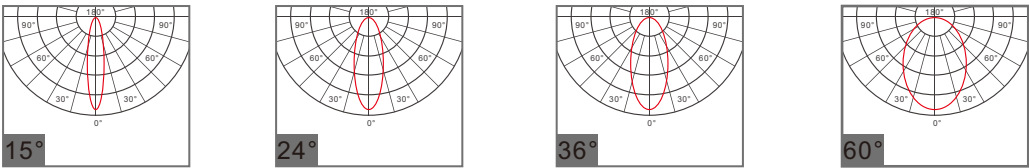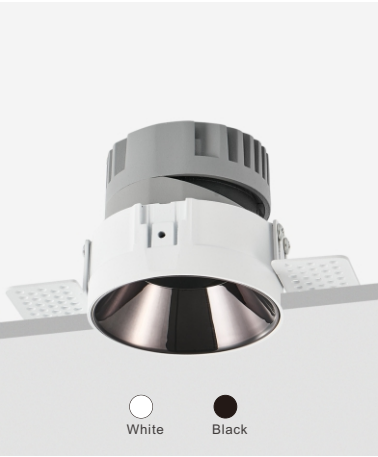


Code No.:DL201N-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

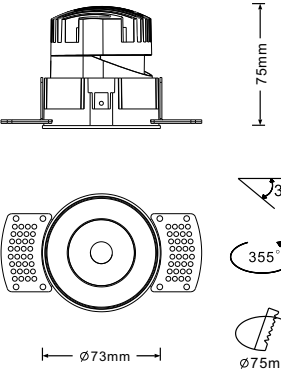

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

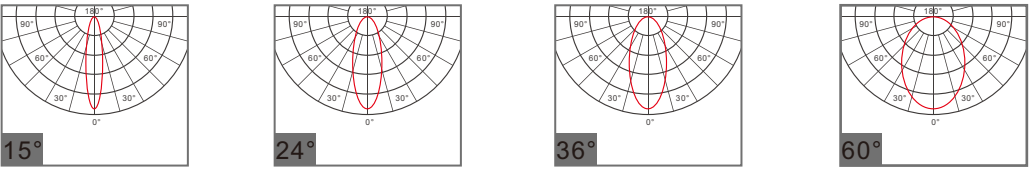


Code No.:DL201N-B


Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387M	1430LM	1480LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

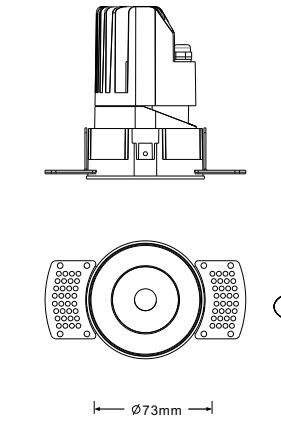

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold






PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

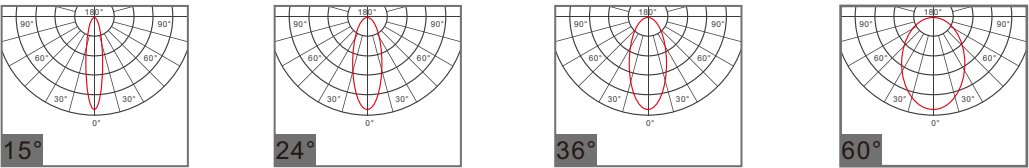


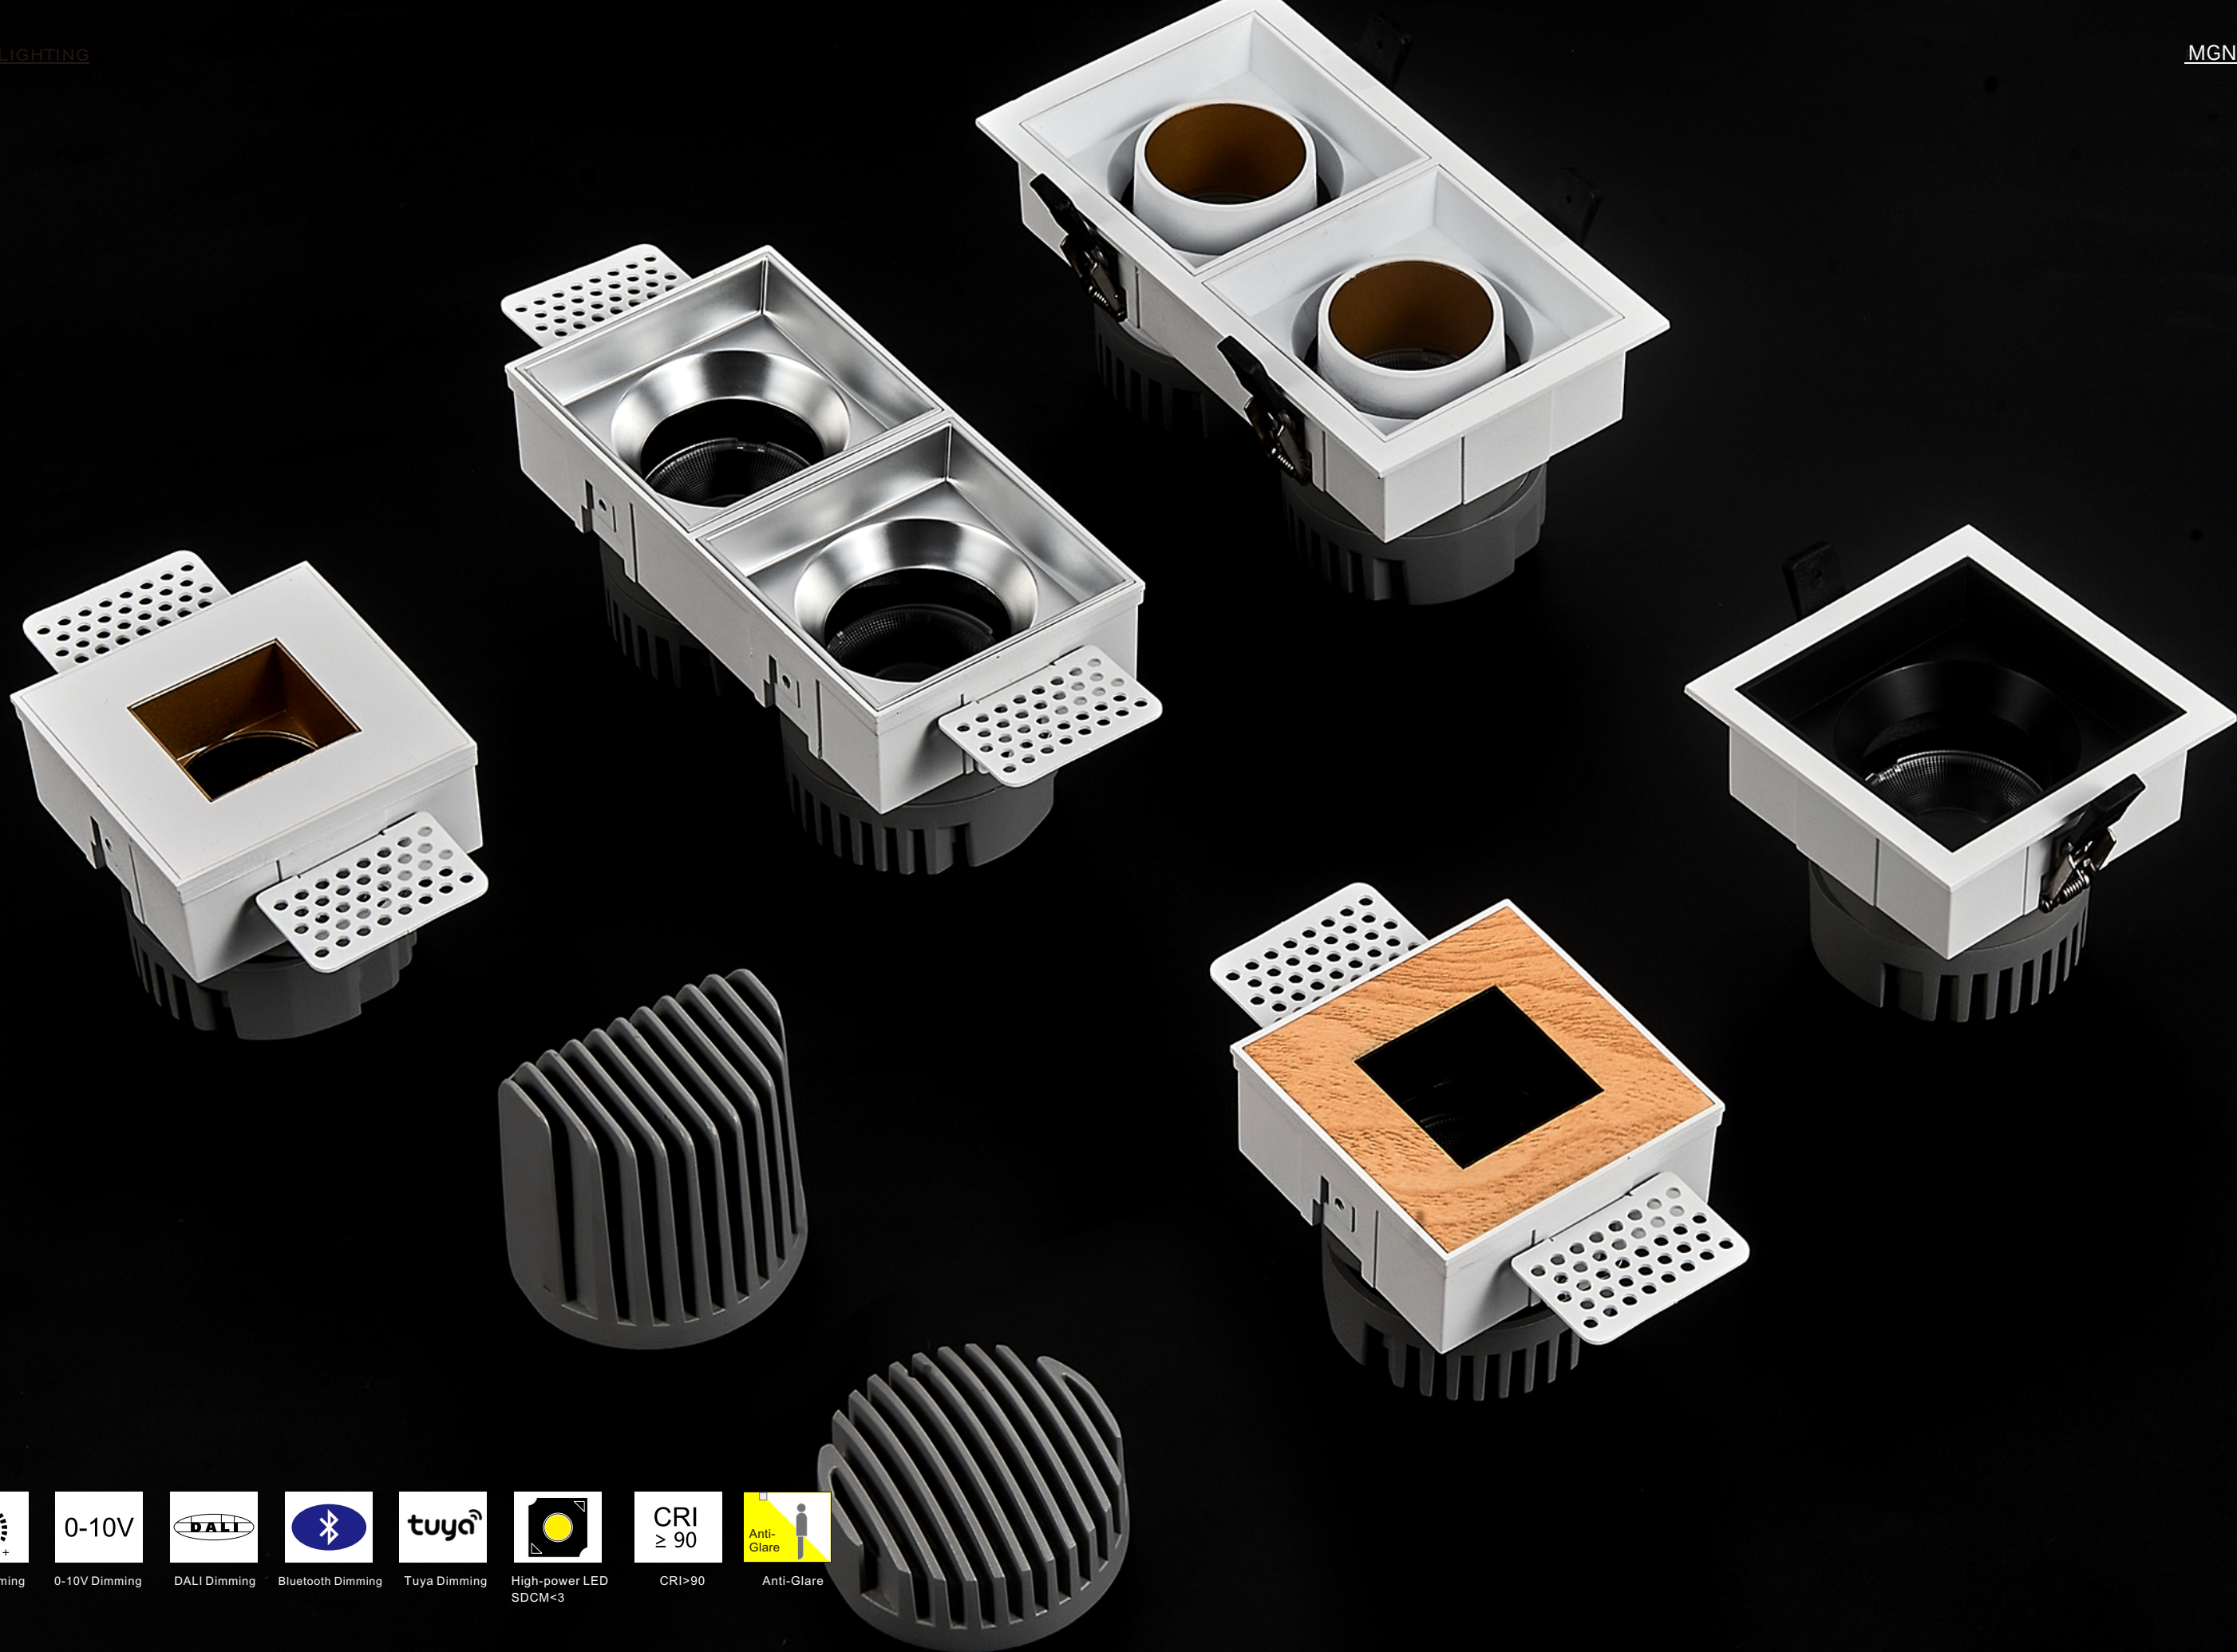


-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  Tuya Dimming
-  High-power LED
SDCM<3
-  CRI > 90
-  Anti-Glare




Code No.:DL201S-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			

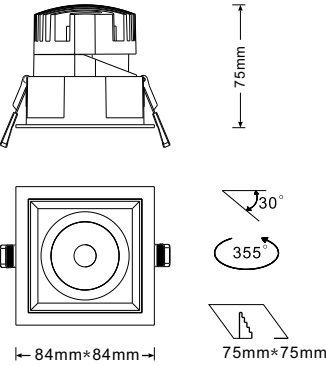


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

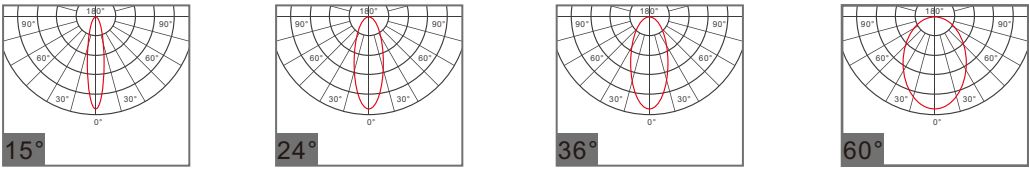

Code No.:DL201S-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

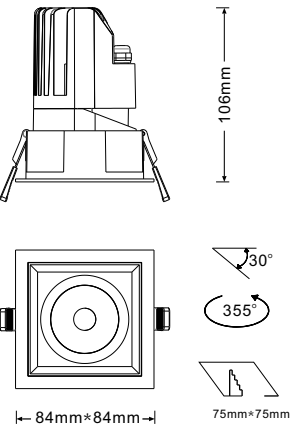


Reflector



2700K / 3000K / 3500K / 4000K / 5000K


Angle

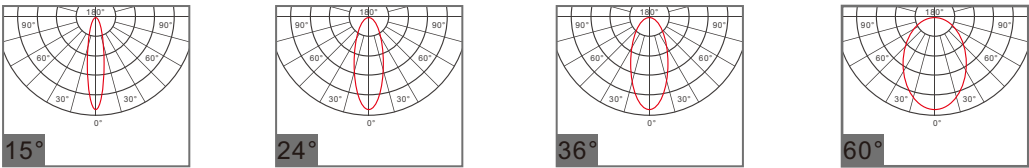




Code No.:DL221-A


Power	MAX 2*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			



75mm



156mm*84mm








Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K

Angle

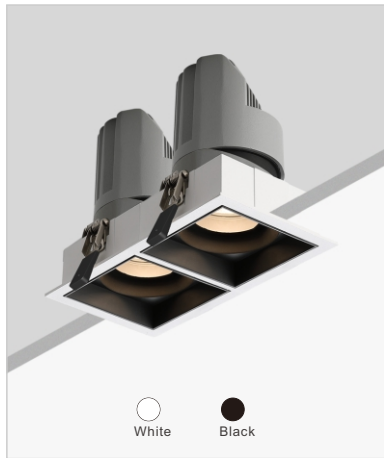


Code No.:DL221-B

Power	MAX 2*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



106mm



156mm*84mm







Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K



Angle





Code No.:DL231-A

Power	MAX 3*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			

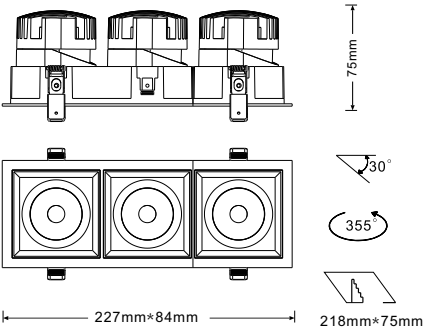

White
Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

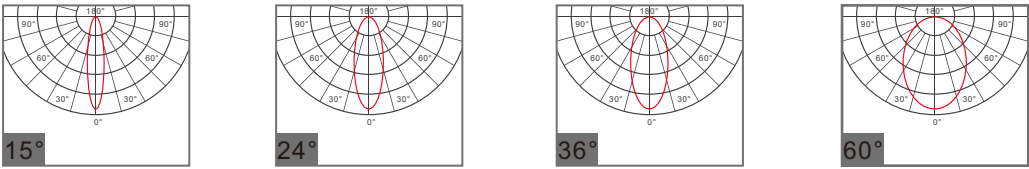

Code No.:DL231-B

Power	MAX 3*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

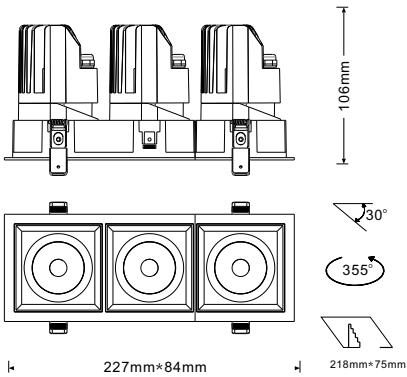

White
Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

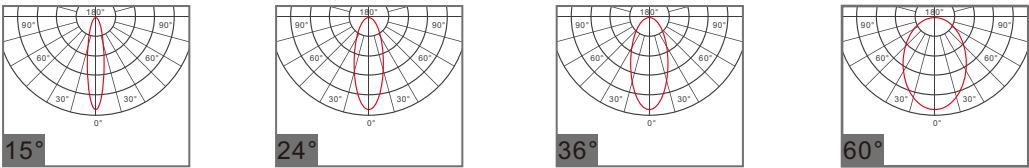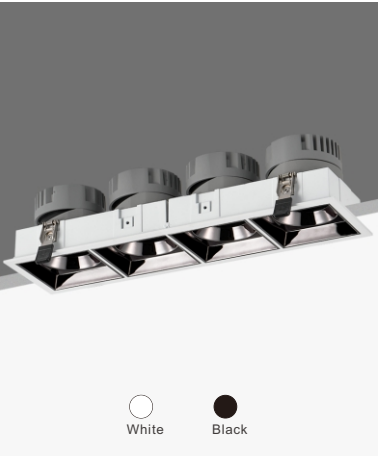

Code No.:DL241-A

Power	MAX 4*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			



White
Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

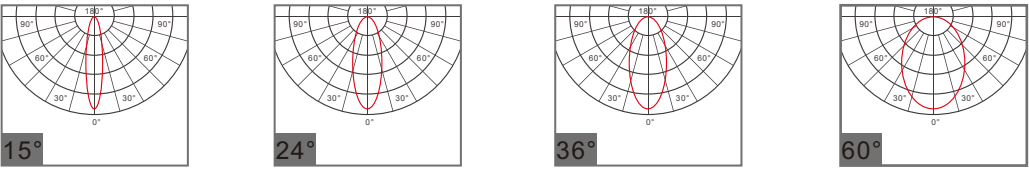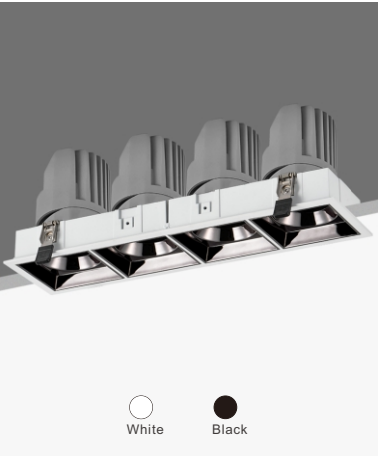

Code No.:DL241-B

Power	MAX 4*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



White
Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K


Angle

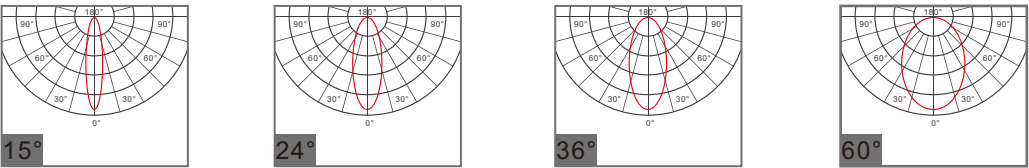




Code No.:DL241S-A

Power	MAX 4*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			



75mm



30°

355°



145mm*145mm

156mm*156mm






Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.



2700K / 3000K / 3500K / 4000K / 5000K

Angle

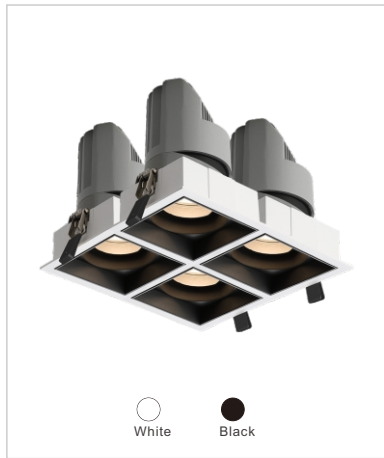


Code No.:DL241S-B

Power	MAX 4*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



106mm



30°

355°



145mm*145mm

156mm*156mm





Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle



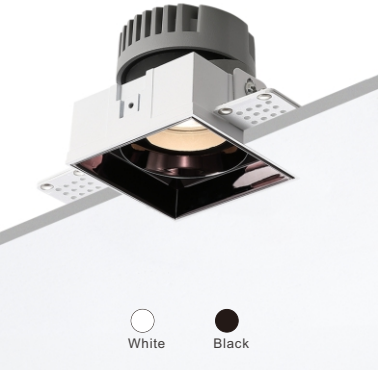

Code No.:DL201SN-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			


 White

 Black


 Honey Comb

 Spread Lens

 Solite Lens



Reflector







PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

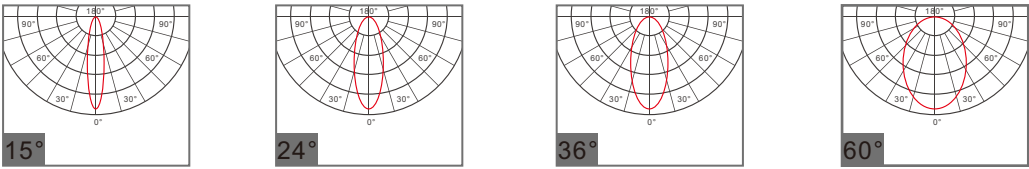

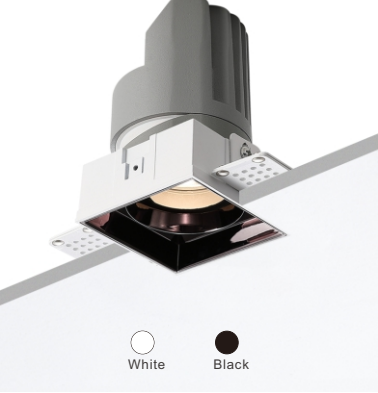

Code No.:DL201SN-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			


 White

 Black


 Honey Comb

 Spread Lens

 Solite Lens

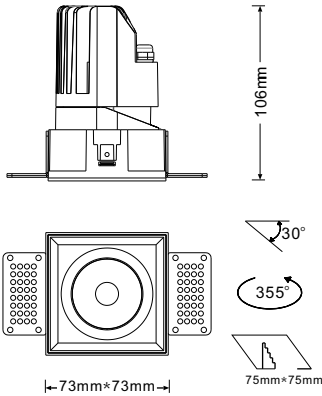

Reflector







PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

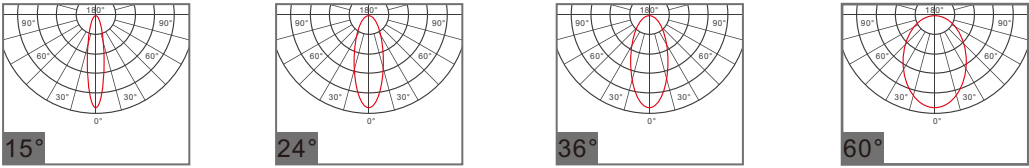

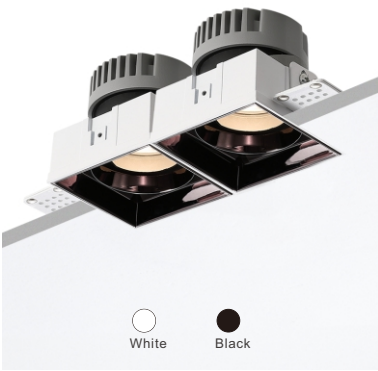

Code No.:DL221N-A

Power	MAX 2*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			


 White

 Black

 Honey Comb

 Spread Lens

 Solite Lens

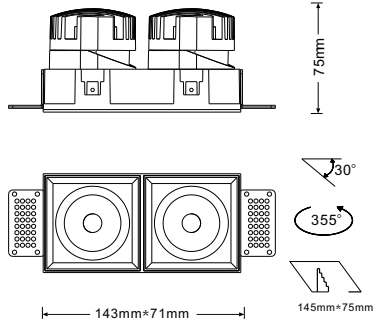

Reflector






PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

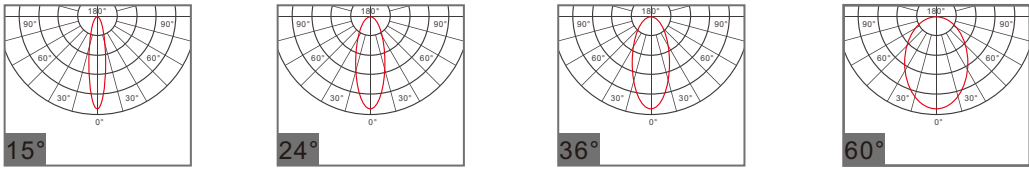



Code No.:DL221N-B

Power	MAX 2*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			


 White

 Black

 Honey Comb

 Spread Lens

 Solite Lens

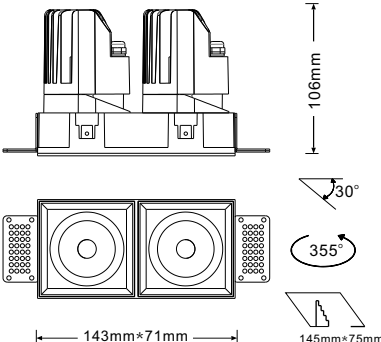

Reflector







PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K


Angle

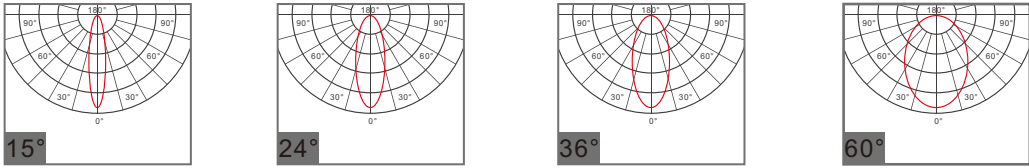

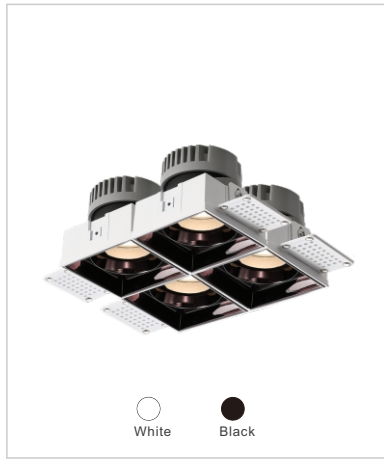

Code No.:DL241SN-A

Power	MAX 4*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			


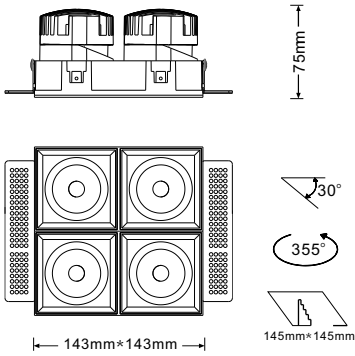


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K

Angle

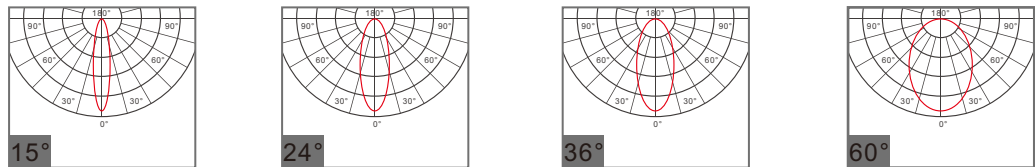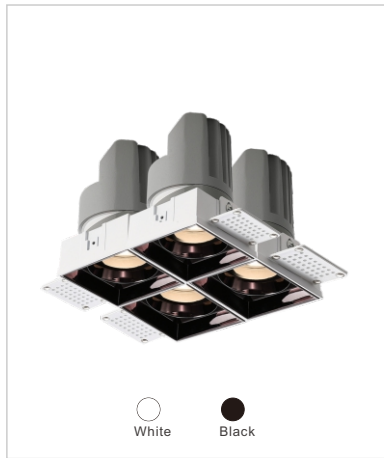

Code No.:DL241SN-B

Power	MAX 4*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

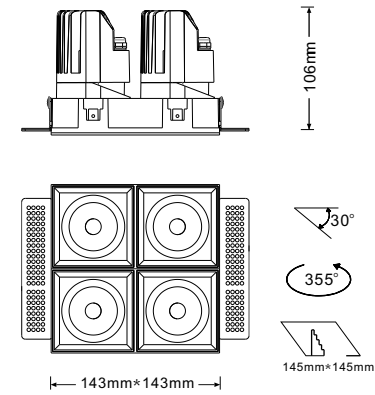



Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K

Angle

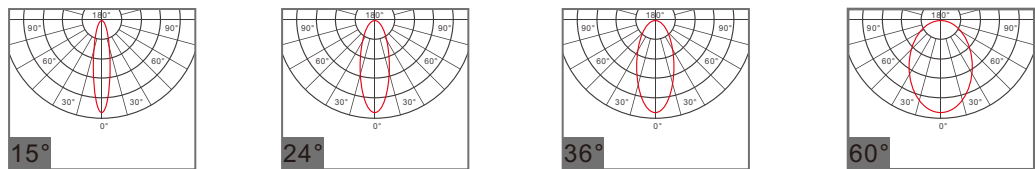

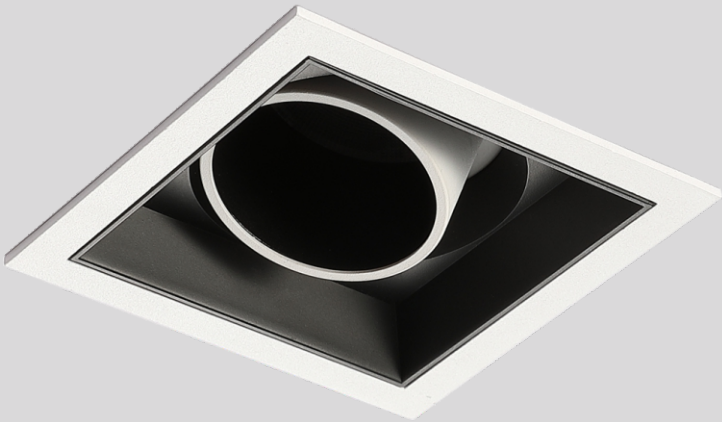

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED
SDCM<3



CRI>90




Anti-Glare



Code No.:DL302-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			

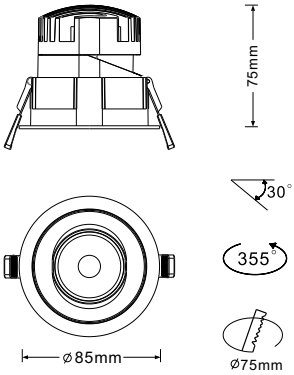


Reflector





PHILIPS LUMINUS CITIZEN CREE® bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K

Angle

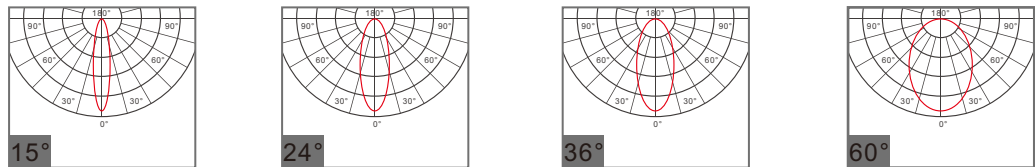

Code No.:DL302-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			


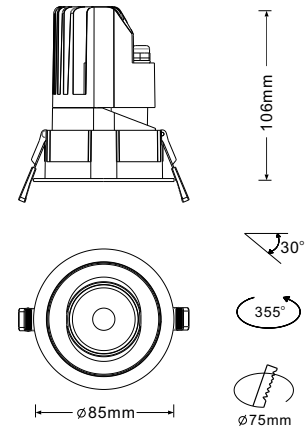


Reflector




PHILIPS LUMINUS CITIZEN CREE® bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K

Angle

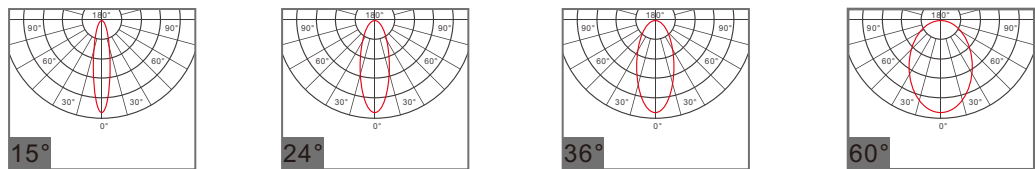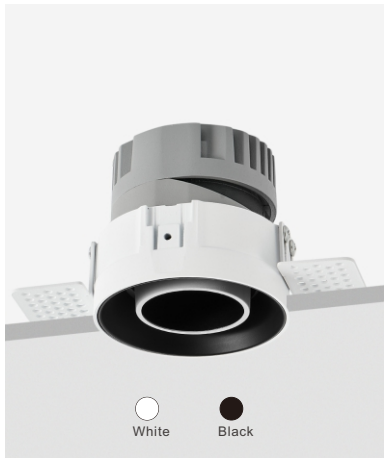

Code No.:DL302N-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			


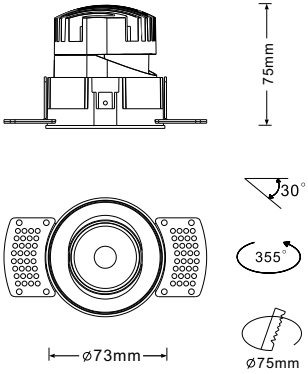


Reflector




PHILIPS LUMINUS CITIZEN CREE® bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K

Angle

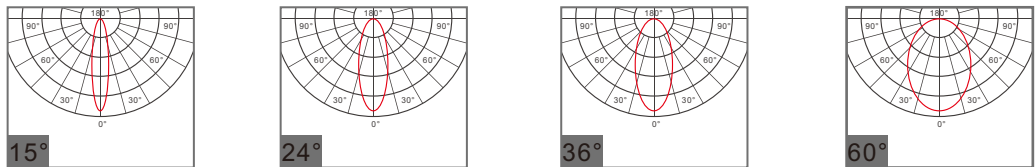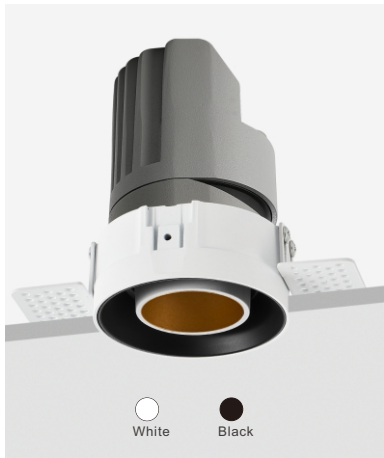

Code No.:DL302N-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20			
Installation	Embedded			

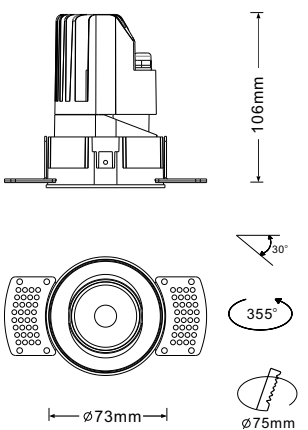


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.
2700K / 3000K / 3500K / 4000K / 5000K



Angle

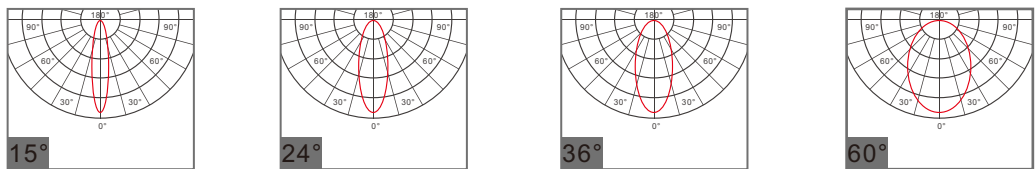



Code No.:DL302S-A


Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			

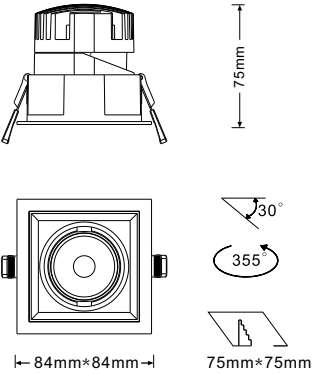

Reflector




Angle

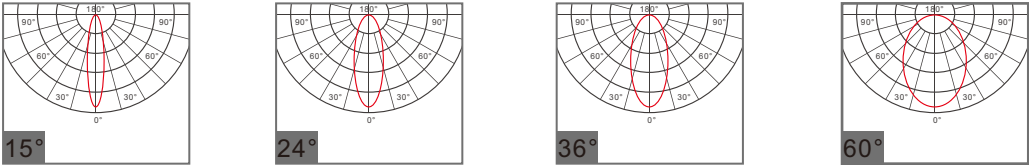

Code No.:DL302S-B


Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

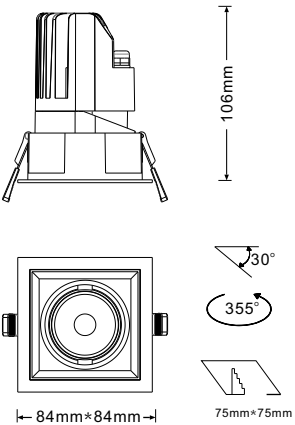

Reflector






Angle

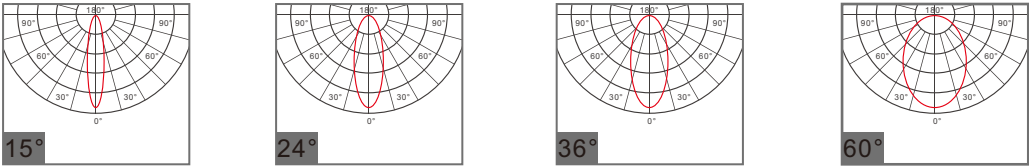



Code No.:DL322-A

Power	MAX 2*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			



156mm*84mm

145mm*75mm





Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.





2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.:DL322-B

Power	MAX 2*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



156mm*84mm

145mm*75mm





Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle







MGN LIGHTING



Code No.:DL332-A

Power	MAX 3*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			



227mm*84mm

218mm*75mm





Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.





2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.:DL332-B

Power	MAX 3*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



227mm*84mm

218mm*75mm





Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle





Code No.:DL342-A

Power	MAX 4*12W			
Voltage	36V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			

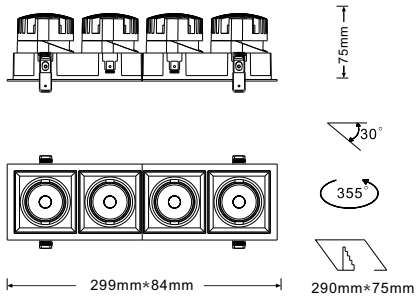


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

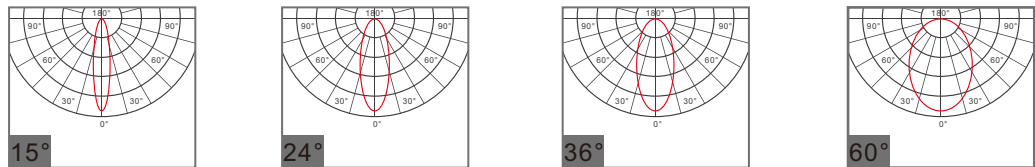

Code No.:DL342-B

Power	MAX 4*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

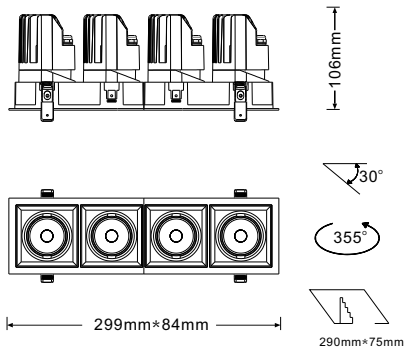


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

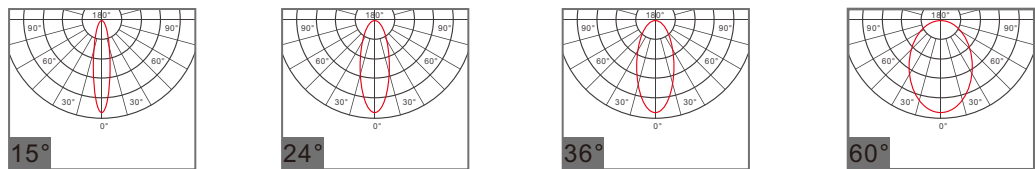

Code No.:DL342S-A

Power	MAX 4*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			




Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

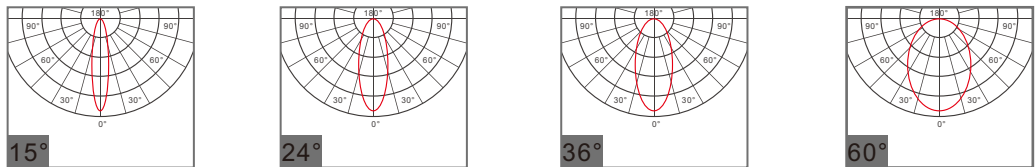

Code No.:DL342S-B

Power	MAX 4*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

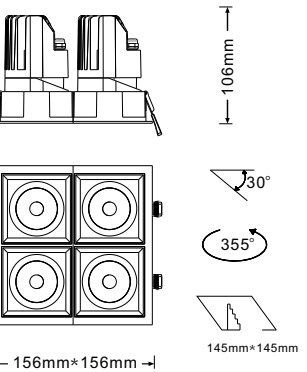


Reflector




PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

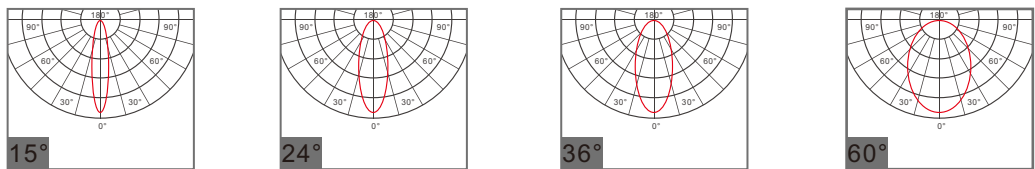

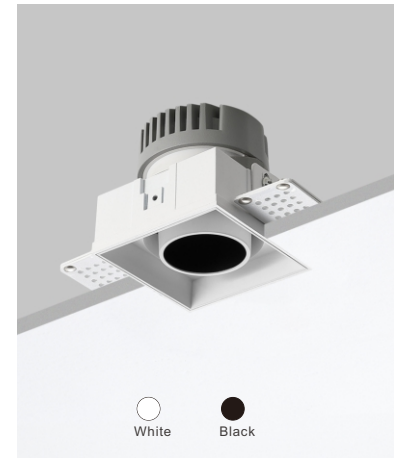


Code No.:DL302SN-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens



Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

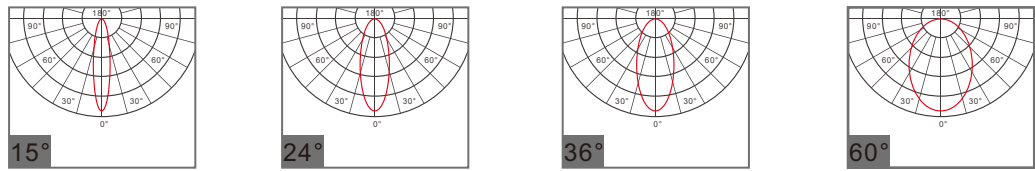


Code No.:DL302SN-B


Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

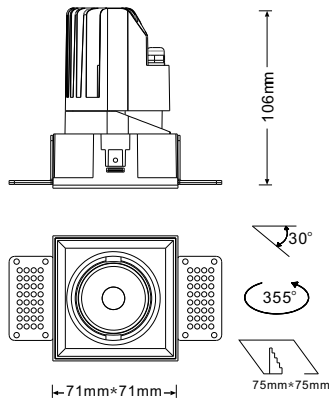

Reflector





Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

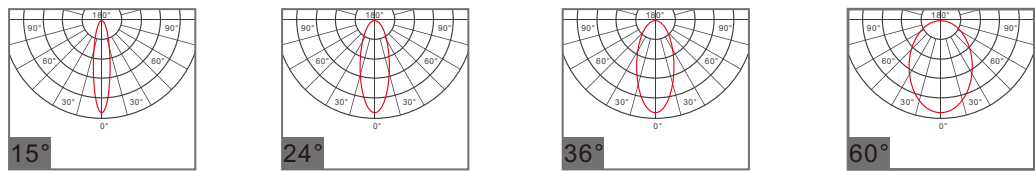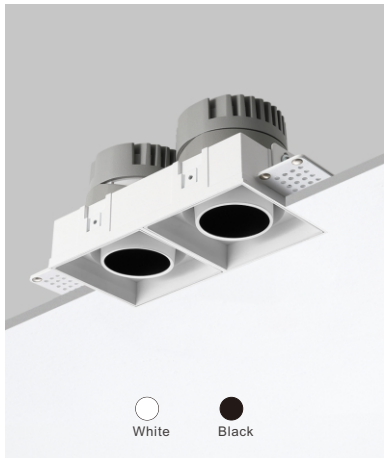


Code No.:DL322N-A

Power	MAX 2*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

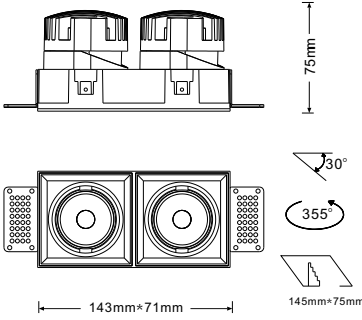

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

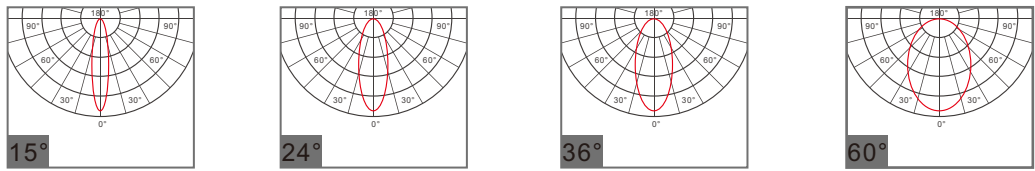


Code No.:DL322N-B

Power	MAX 2*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

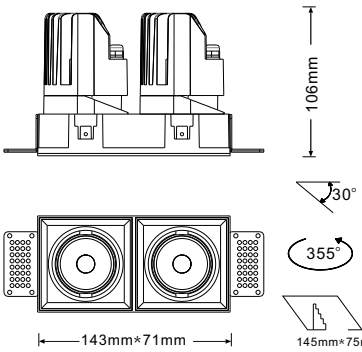

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold




PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

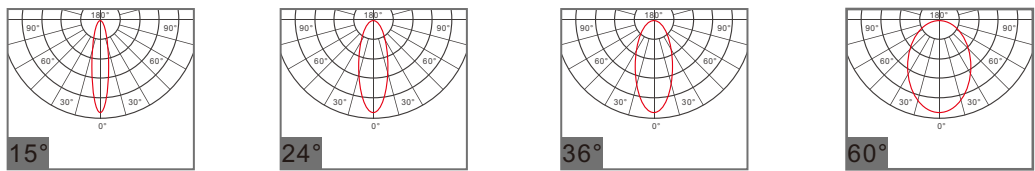

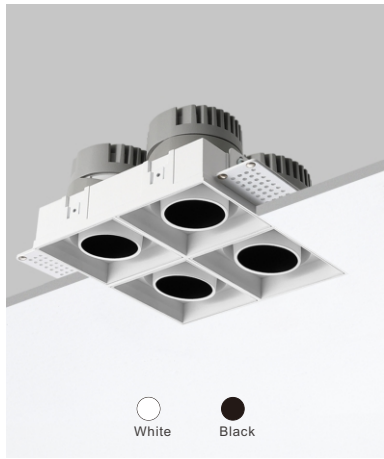


Code No.:DL342SN-A


Power	MAX 4*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	870LM	879LM	905LM	937LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens



75mm



143mm*143mm

30°

355°

145mm*145mm

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold




PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle




15°



24°



36°



60°




Code No.:DL342SN-B


Power	MAX 4*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1306LM	1318LM	1458LM	1406LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens



106mm



143mm*143mm

30°

355°

145mm*145mm

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold




PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle




15°



24°




36°




60°



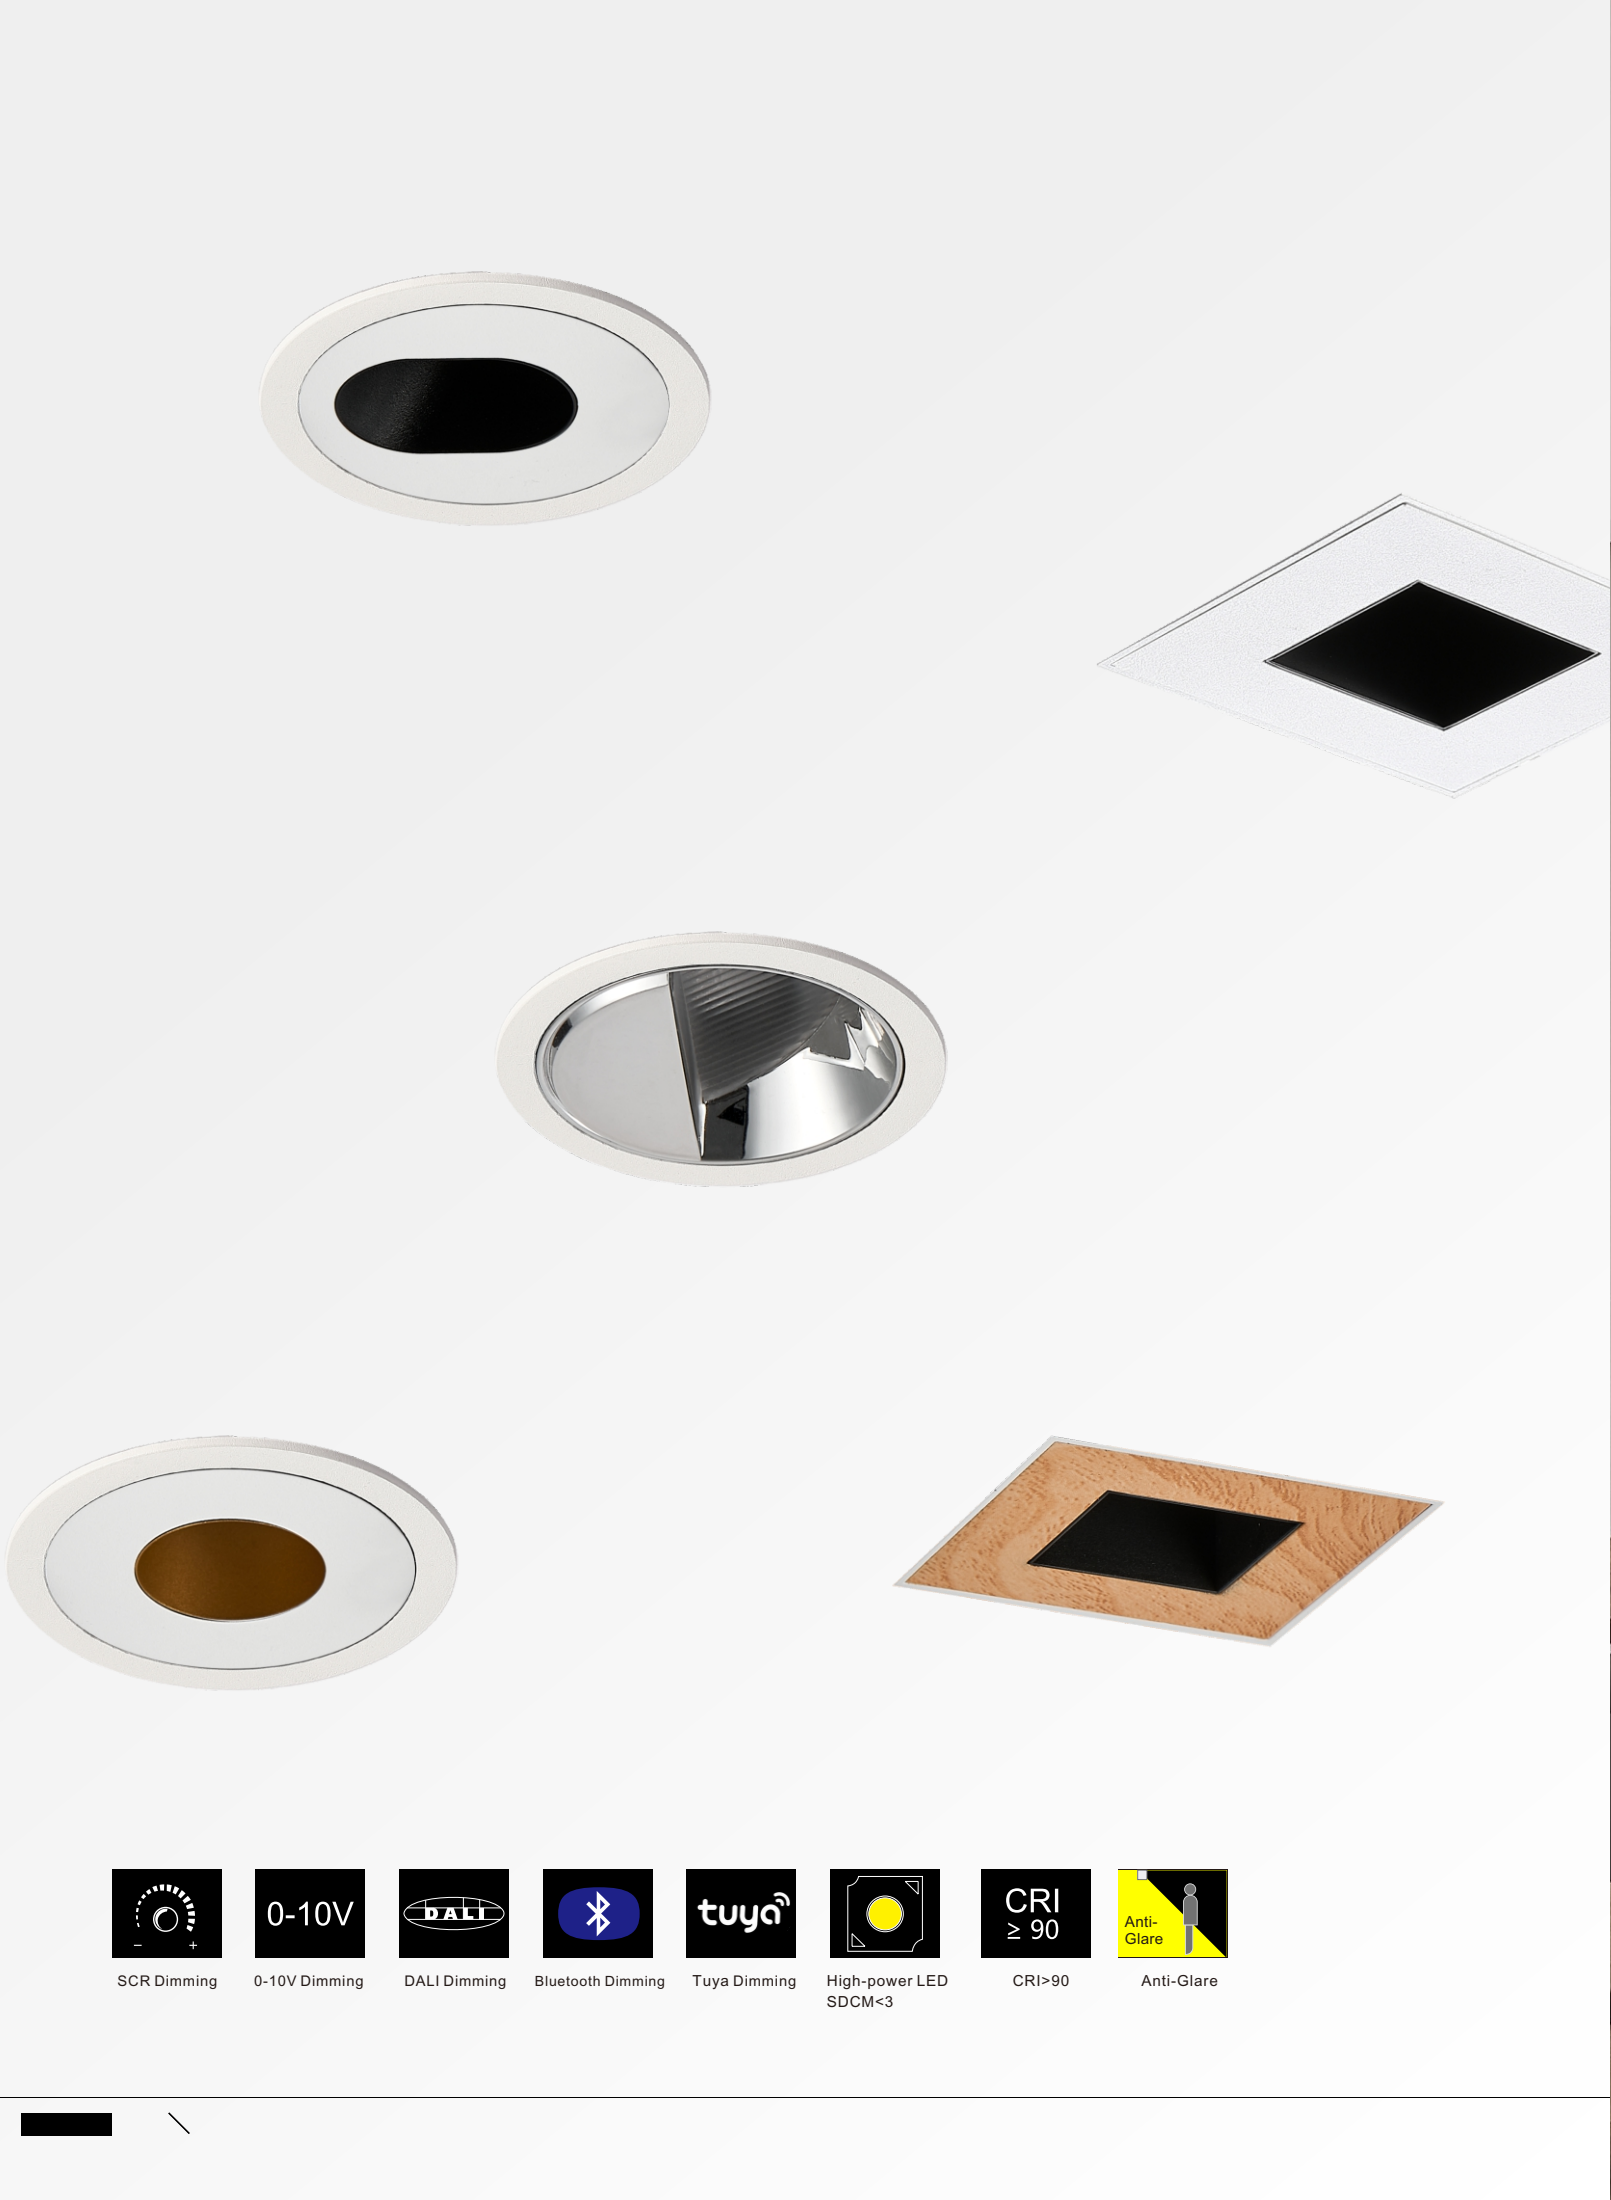

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED
SDCM<3



CRI>90




Anti-Glare





Code No.:DL205-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	861LM	869LM	896LM	927LM
CRI	90/98			
IP	20			
Installation	Embedded			

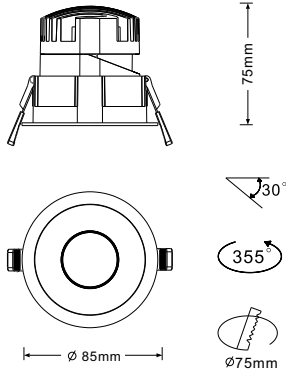


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

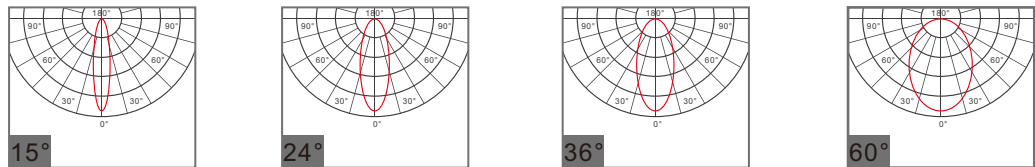

Code No.:DL205-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1292LM	1304LM	1344LM	1391LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

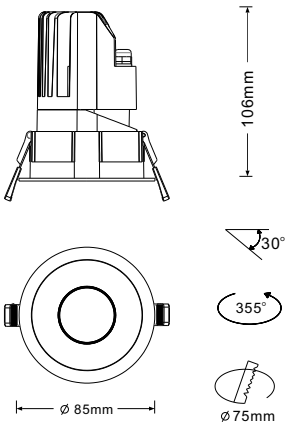



Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

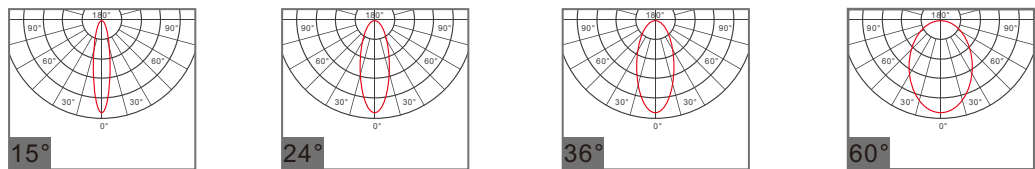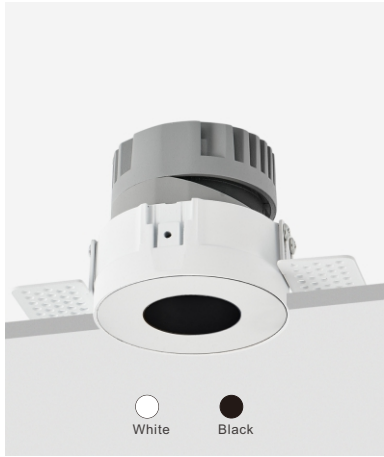


Code No.:DL205N-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	861LM	869LM	896LM	927LM
CRI	90/98			
IP	20			
Installation	Embedded			

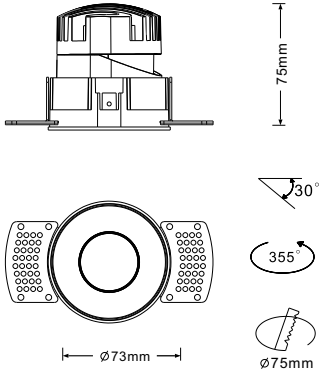



Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.



2700K / 3000K / 3500K / 4000K / 5000K

Angle

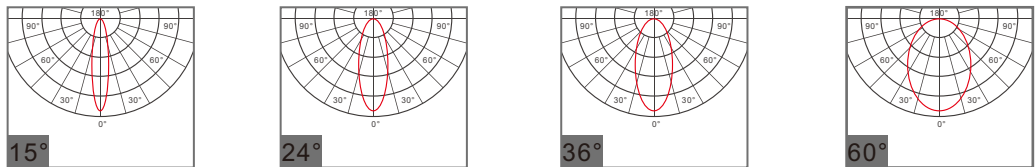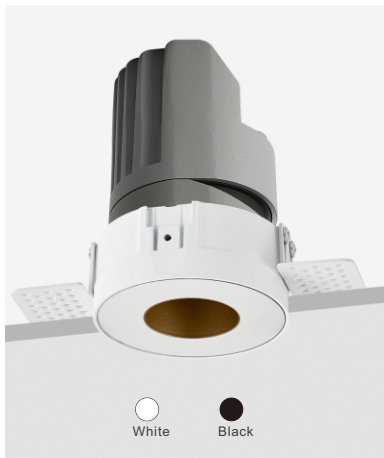


Code No.:DL205N-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1292LM	1304LM	1344LM	1391LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

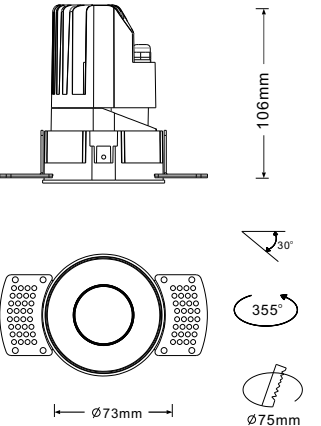


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K



Angle

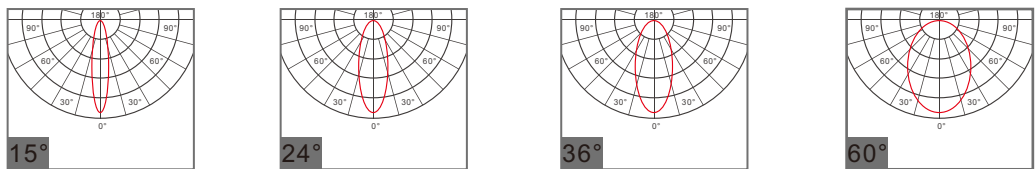



Code No.:DL206-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Embedded			

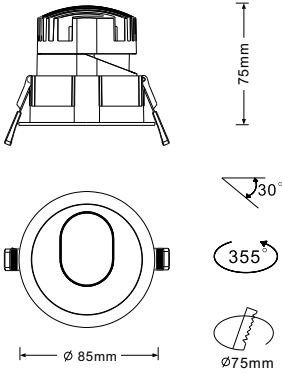


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

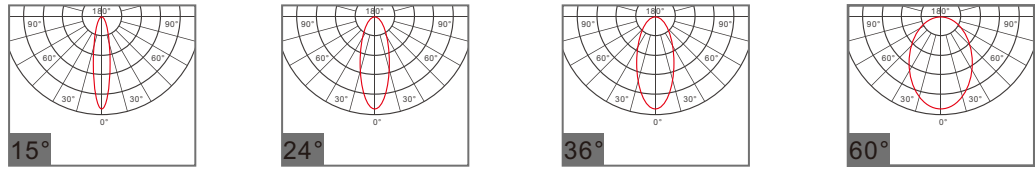

Code No.:DL206-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1237LM	1249LM	1287LM	1332LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

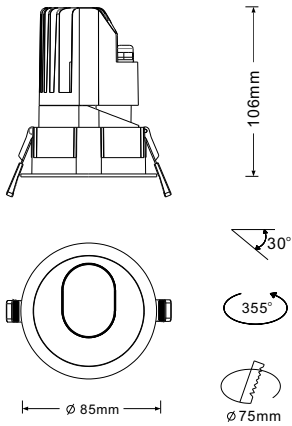


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

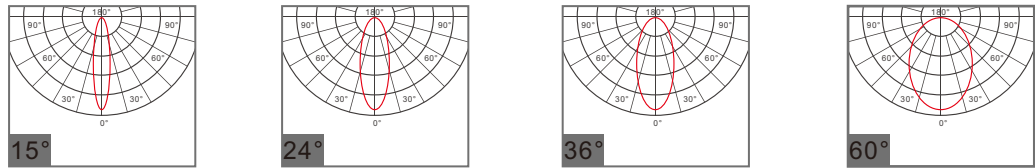

Code No.:DL206N-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Embedded			

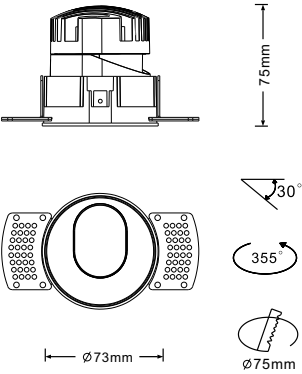


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.



2700K / 3000K / 3500K / 4000K / 5000K

Angle

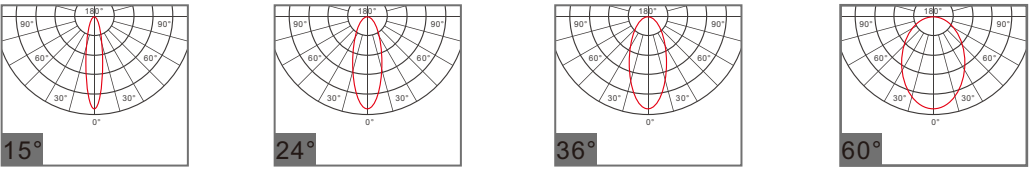

Code No.:DL206N-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1237LM	1249LM	1287LM	1332LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

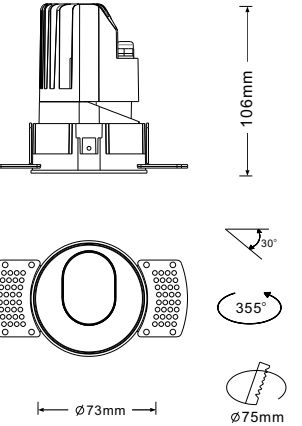


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

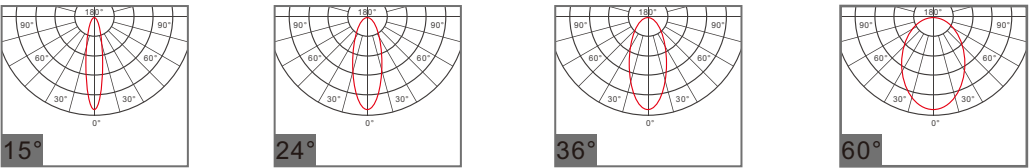



Code No.:DL204-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Embedded

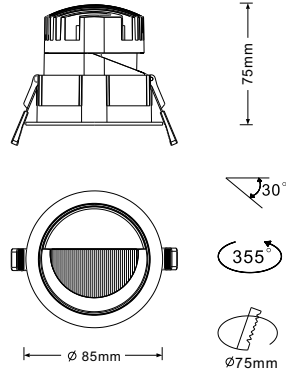

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Embedded

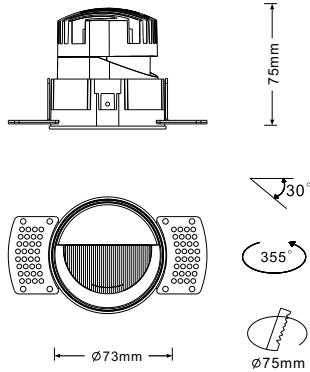

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded

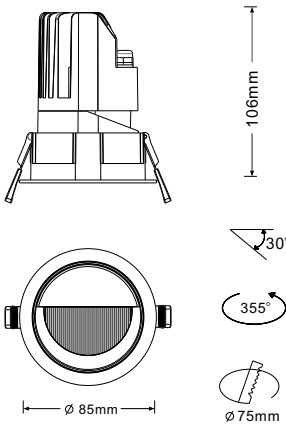

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded

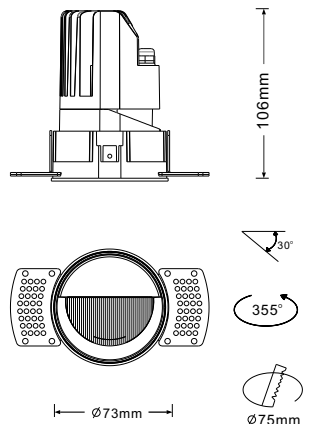

Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K




Code No.:DL207S-A


Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens



75mm



84mm*84mm

30°


355°



75mm*75mm

White Black

Reflector







Matt Black Matt Gold Matt White Matt Black Timbe



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle




Code No.:DL207S-B


Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1237LM	1249LM	1287LM	1332LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens



106mm



84mm*84mm

30°

355°



75mm*75mm

White Black

Reflector








Matt Black Matt Gold Matt White Matt Black Timbe



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

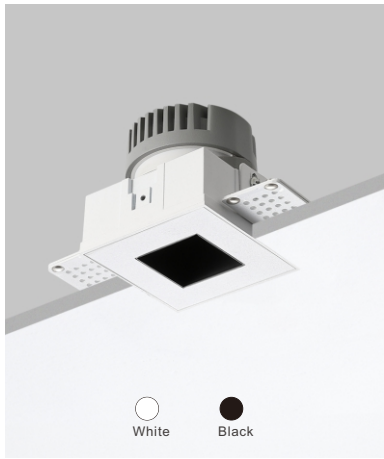


Code No.:DL207SN-A


Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens



75mm



71mm*71mm

30°


355°



75mm*75mm

White Black

Reflector







Matt Black Matt Gold Matt White Matt Black Timbe



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle




Code No.:DL207SN-B


Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1237LM	1249LM	1287LM	1332LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens



106mm



71mm*71mm

30°

355°



75mm*75mm

White Black

Reflector







Matt Black Matt Gold Matt White Matt Black Timbe



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle





Code No.:DL227-A

Power	MAX 2*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Embedded			

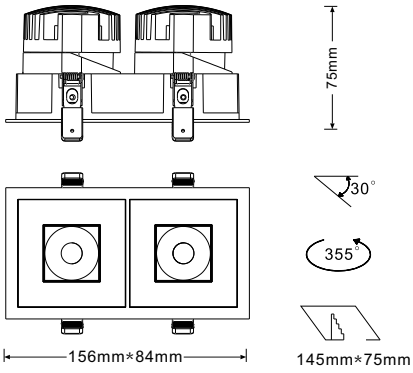


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

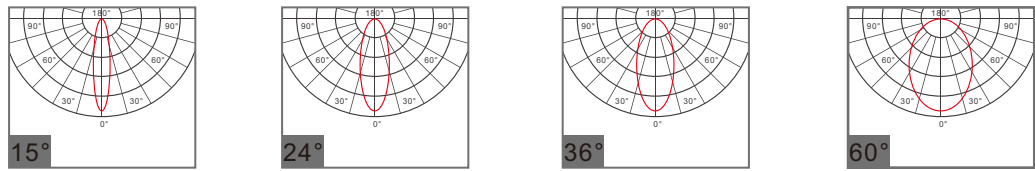

Code No.:DL227-B

Power	MAX 2*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1237LM	1249LM	1287LM	1332LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

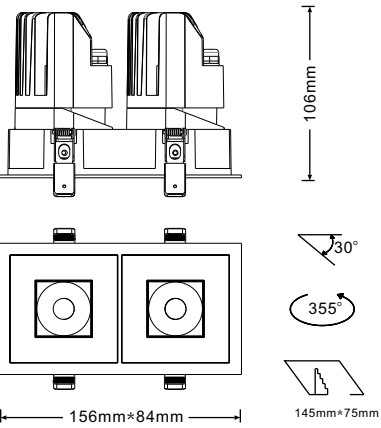



Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

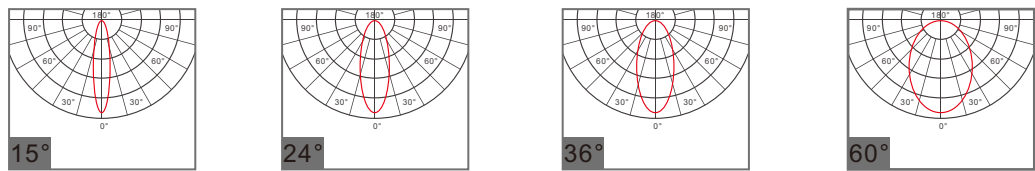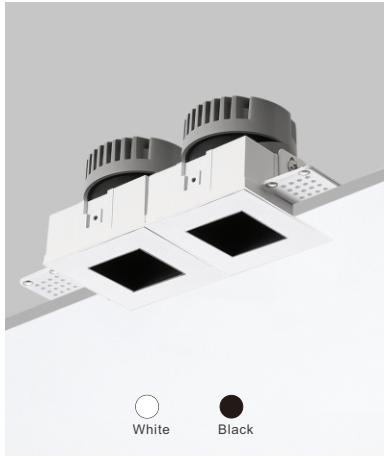

Code No.:DL227N-A

Power	MAX 2*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Embedded			

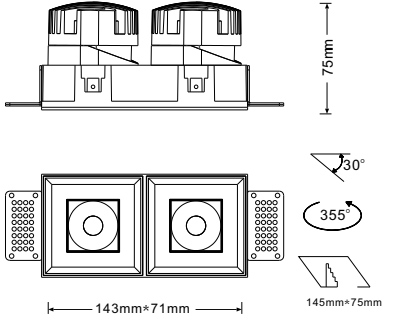


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

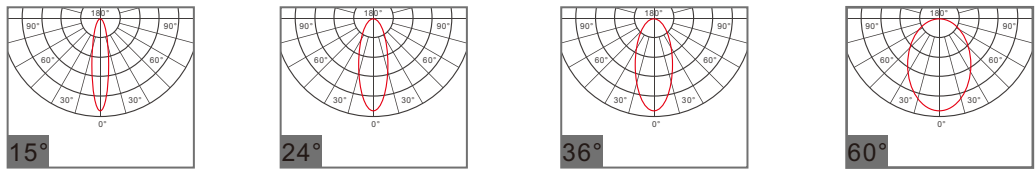

Code No.:DL227N-B

Power	MAX 2*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1237LM	1249LM	1287LM	1332LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

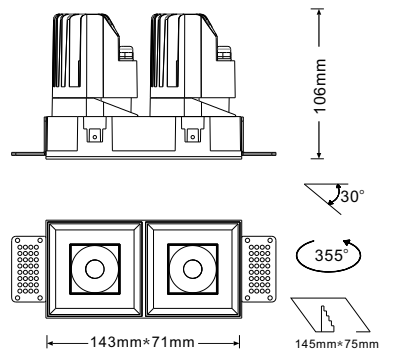


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

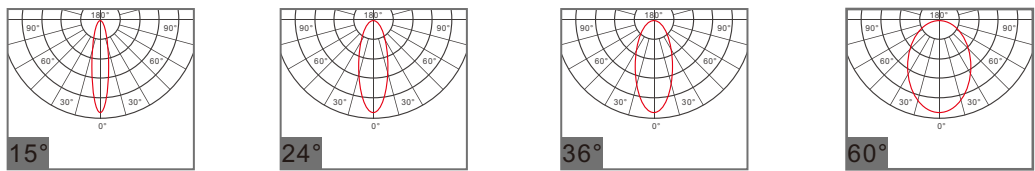



Code No.:DL237-A

Power	MAX 3*12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Embedded			

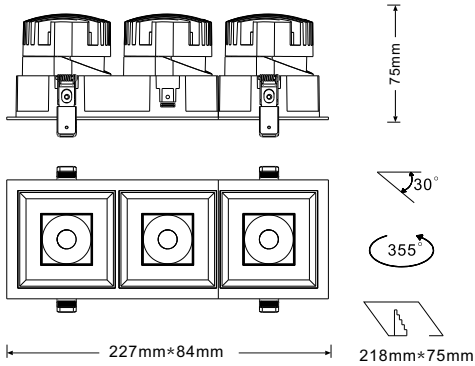


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.



2700K / 3000K / 3500K / 4000K / 5000K

Angle

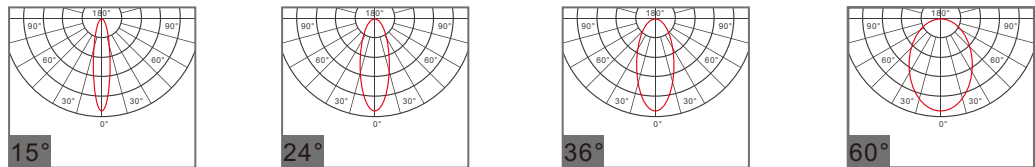

Code No.:DL237-B

Power	MAX 3*18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1237LM	1249LM	1287LM	1332LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

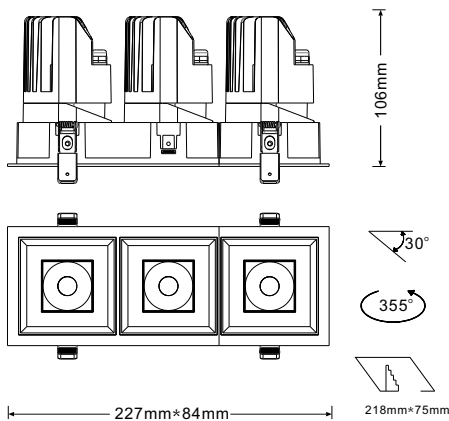


Reflector






PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

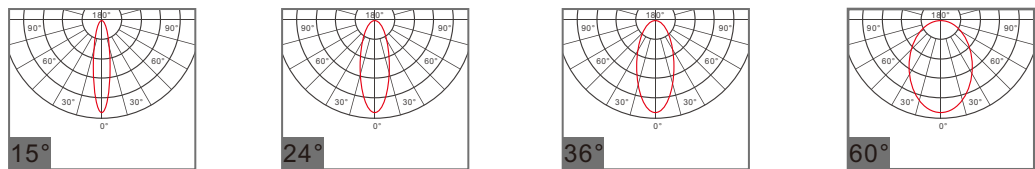





-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  Tuya Dimming
-  High-power LED
SDCM<3
-  CRI>90
-  Anti-Glare

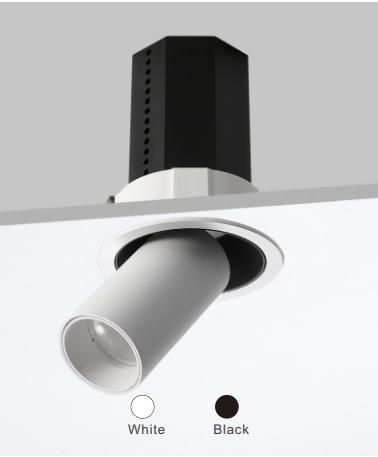

Code No.:DL403

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

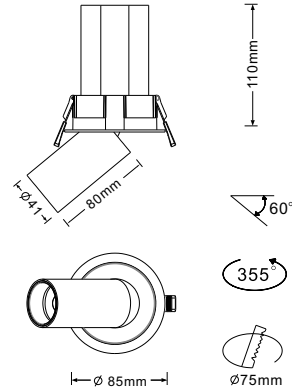





Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle




Code No.:DL403N

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

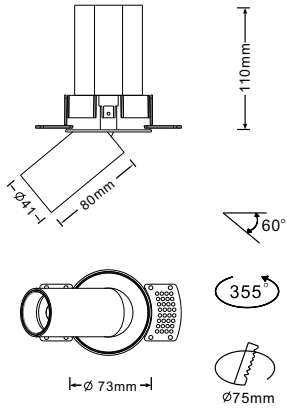





Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle





Code No.:DL403S

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

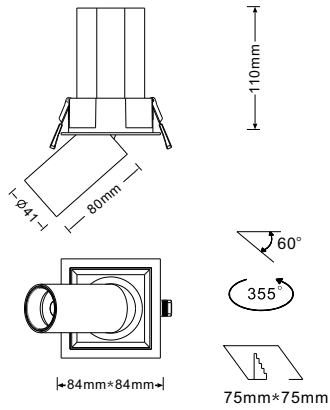



Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

Angle

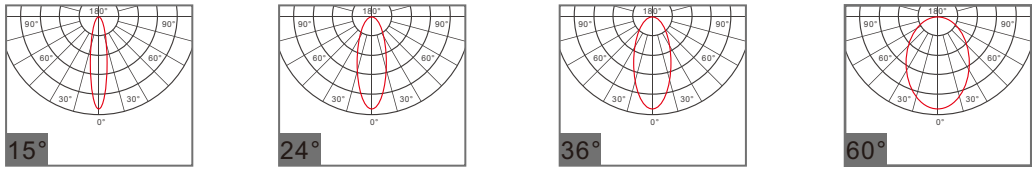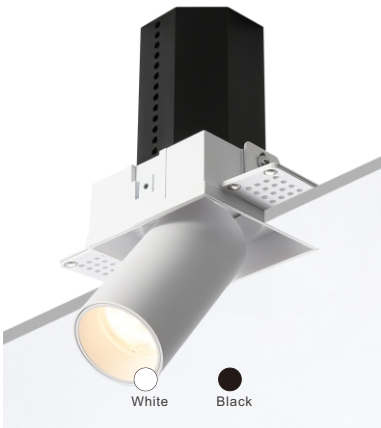

Code No.:DL403SN

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

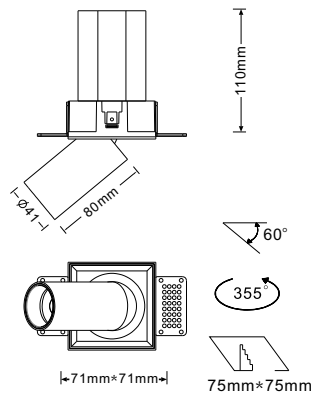



Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®



2700K / 3000K / 3500K / 4000K / 5000K

Angle

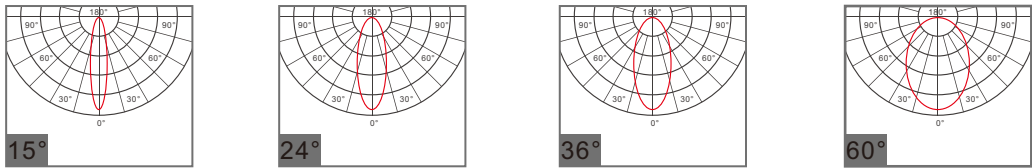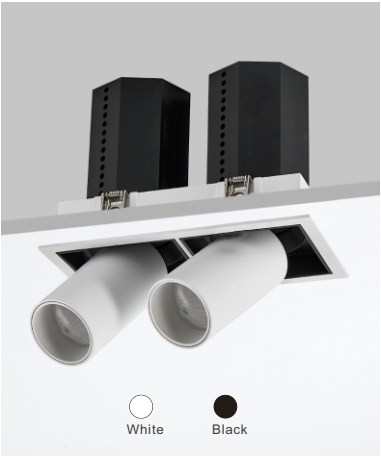

Code No.:DL423

Power	MAX 2*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

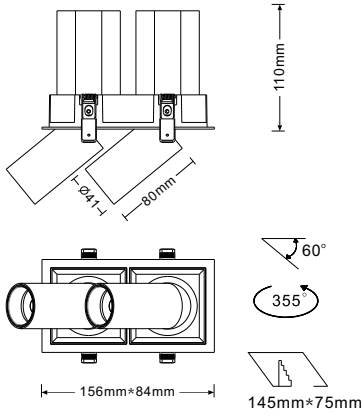



Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

Angle

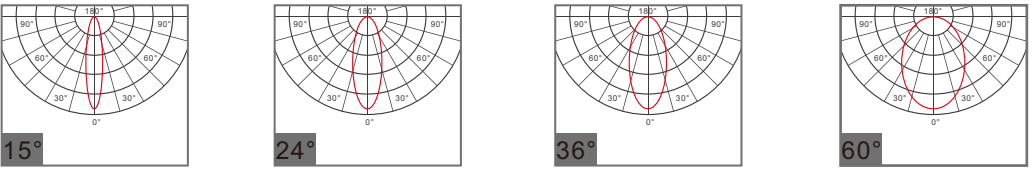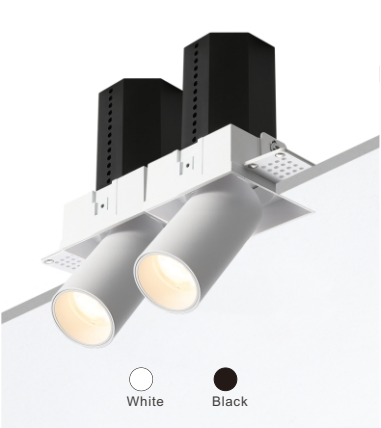

Code No.:DL423N

Power	MAX 2*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

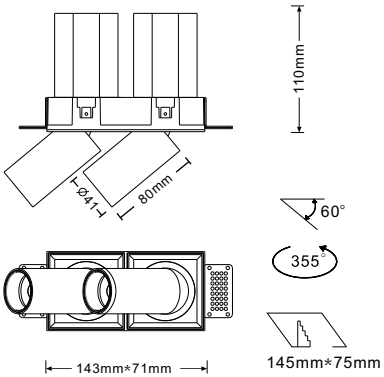


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®

2700K / 3000K / 3500K / 4000K / 5000K

Angle

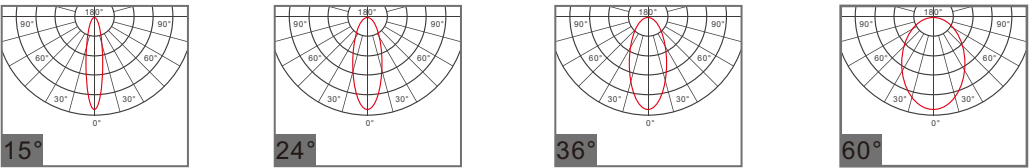




Code No.:DL433

Power	MAX 3*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			





Honey Comb Spread Lens Solite Lens

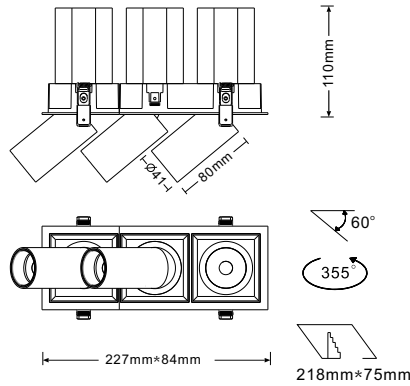

Reflector



Angle

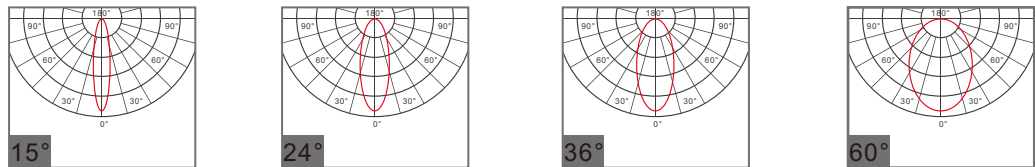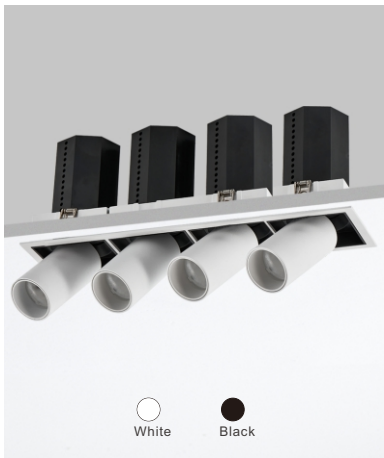


Code No.:DL443

Power	MAX 4*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			




Honey Comb Spread Lens Solite Lens

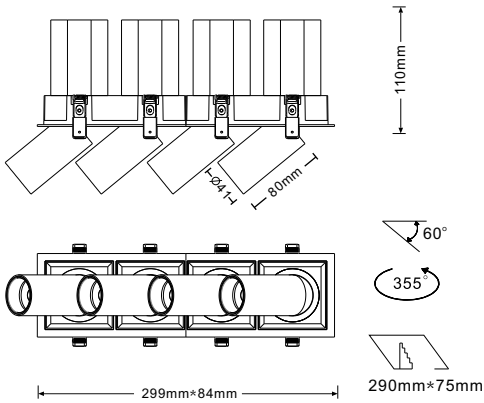

Reflector




Angle

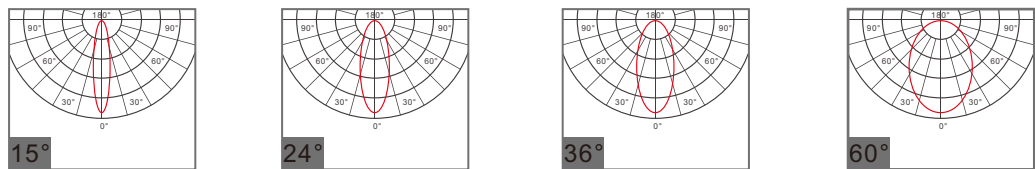


Code No.:DL443S

Power	MAX 4*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			





Honey Comb Spread Lens Solite Lens

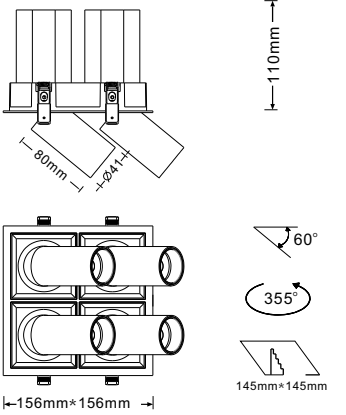

Reflector




Angle

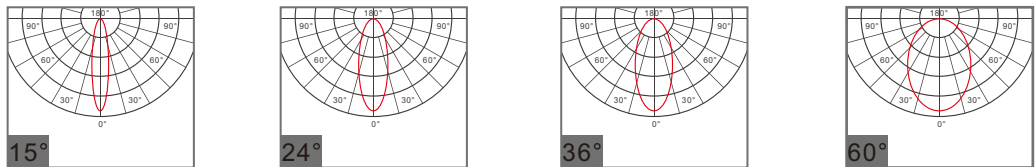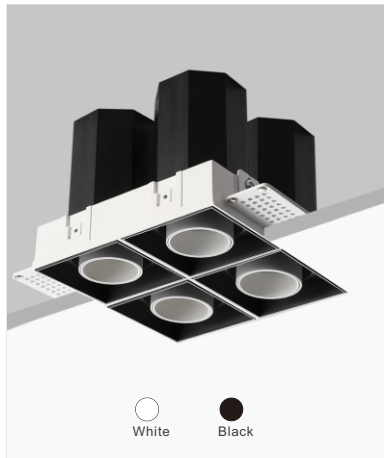


Code No.:DL443SN

Power	MAX 4*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			




Honey Comb Spread Lens Solite Lens



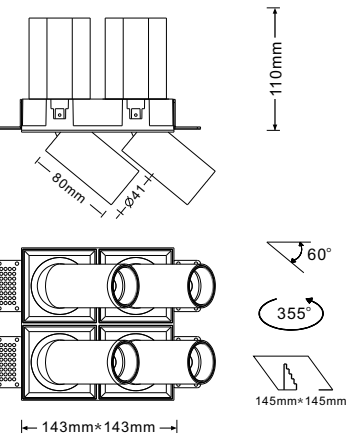


Reflector




Angle

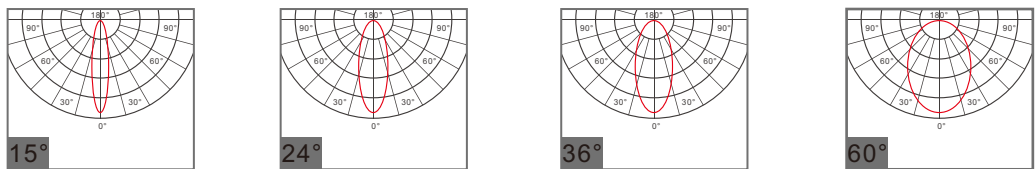

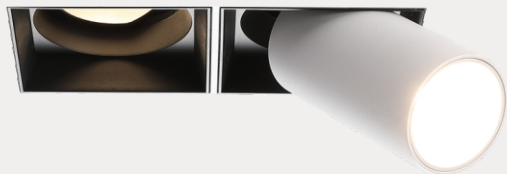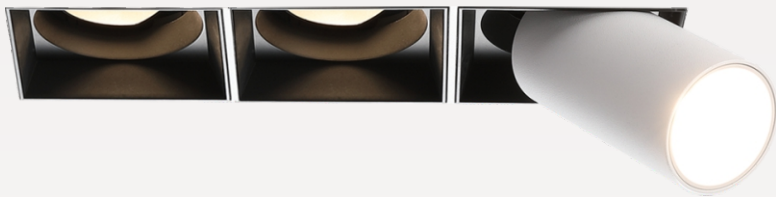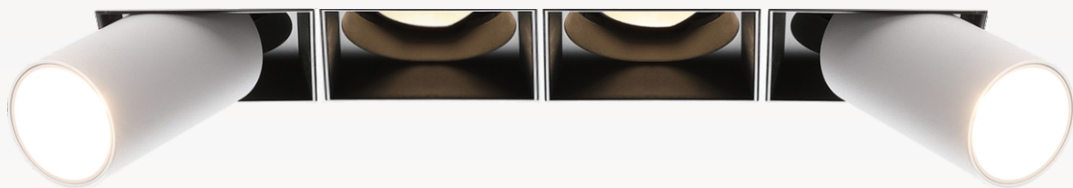

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED
SDCM<3



CRI>90




Anti-Glare




White
Black


Reflector




Angle




15°



24°



36°




60°

Code No.:DL228

Power	MAX 2*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb
Spread Lens
Solite Lens

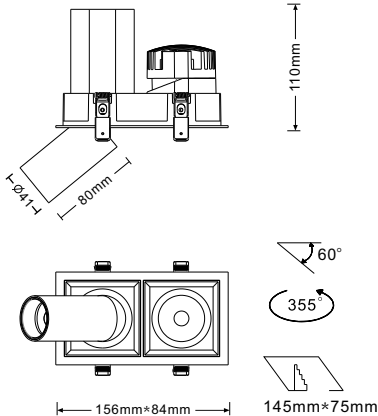

PHILIPS LUMINUS CITIZEN CREE® bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




White
Black


Reflector




Angle




15°



24°



36°




60°

Code No.:DL228N

Power	MAX 2*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			




Honey Comb
Spread Lens
Solite Lens

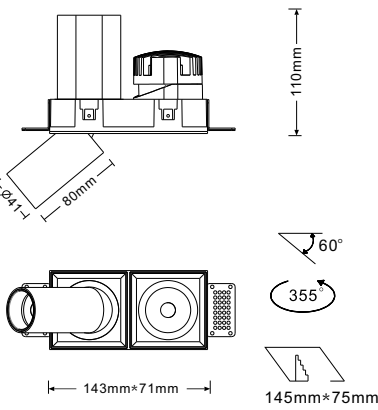

PHILIPS LUMINUS CITIZEN CREE® bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

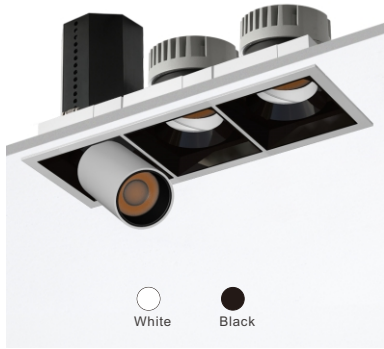

White


Black

Power	MAX 3*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

Honey Comb

Spread Lens

Solite Lens

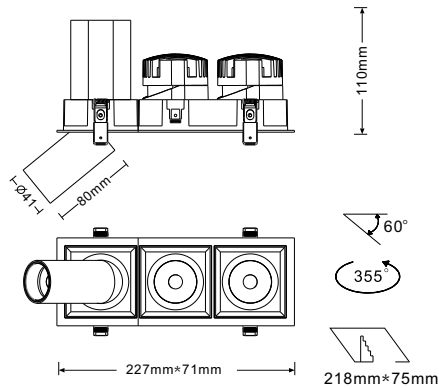


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

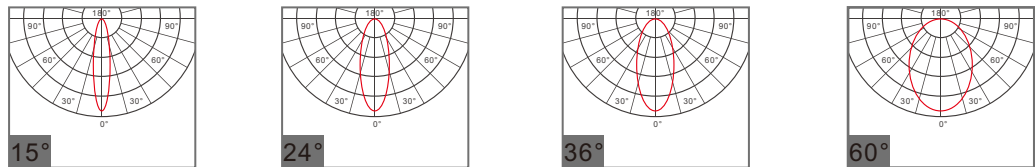



White


Black

Power	MAX 3*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

Honey Comb

Spread Lens

Solite Lens

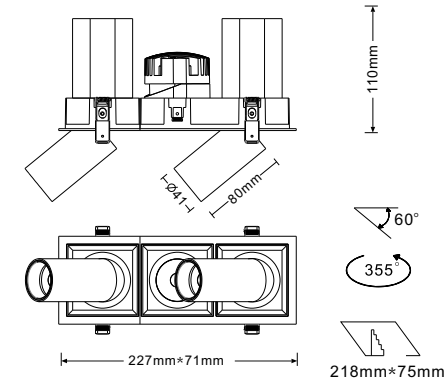


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

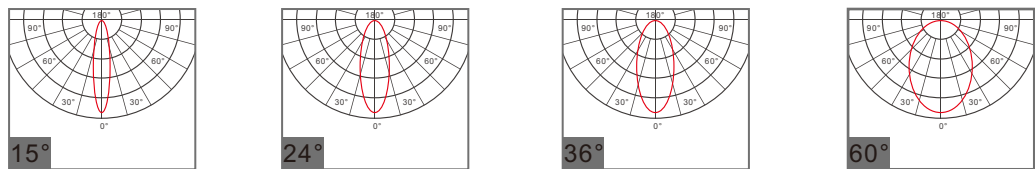

Power	MAX 4*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

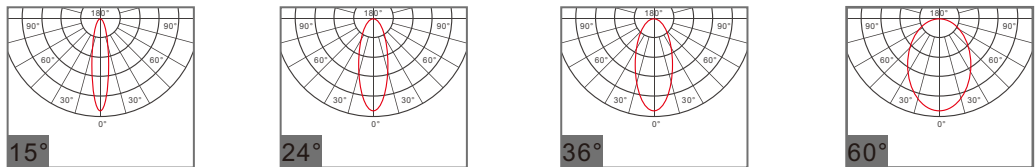

Power	MAX 4*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			





Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux
2700K / 3000K / 3500K / 4000K / 5000K

Angle

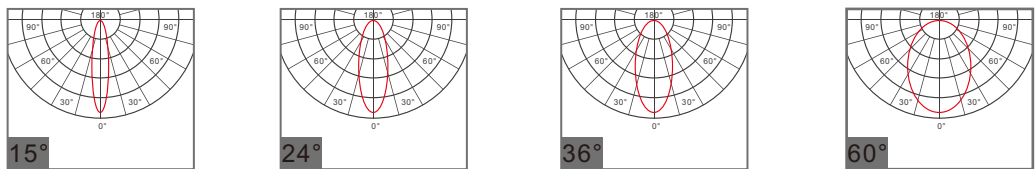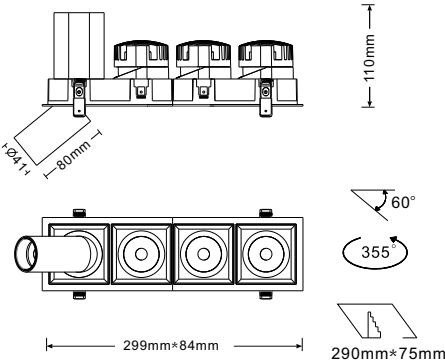



SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED
SDCM<3



CRI>90




Anti-Glare






Code No.:DL509-A

Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	15°	24°	36°	60°
Lumen	611LM	617LM	635LM	658LM
CRI	90/98			
IP	20			
Installation	Surface mounted			




Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

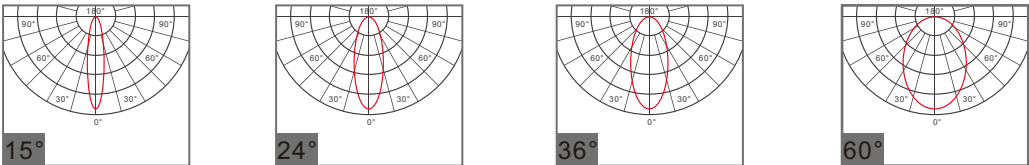

Code No.:DL509-B

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	840LM	848LM	874LM	904LM
CRI	90/98			
IP	20			
Installation	Surface mounted			




Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

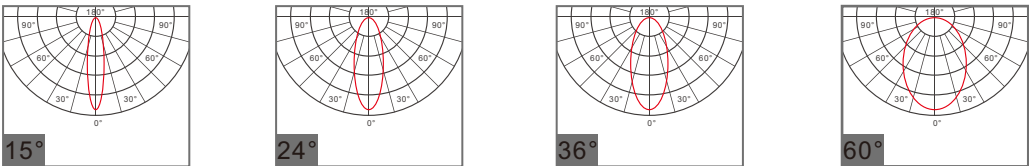

Code No.:DL509A-A

Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	15°	24°	36°	60°
Lumen	550LM	555LM	572LM	592LM
CRI	90/98			
IP	20			
Installation	Surface mounted			




Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

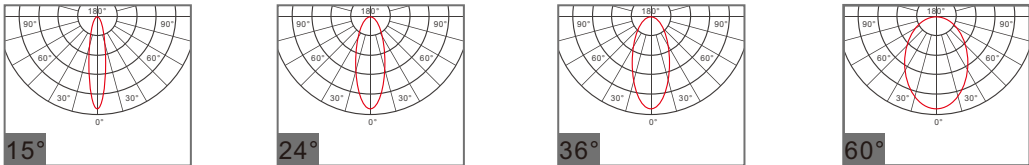

Code No.:DL509A-B

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Surface mounted			




Reflector



2700K / 3000K / 3500K / 4000K / 5000K



Angle

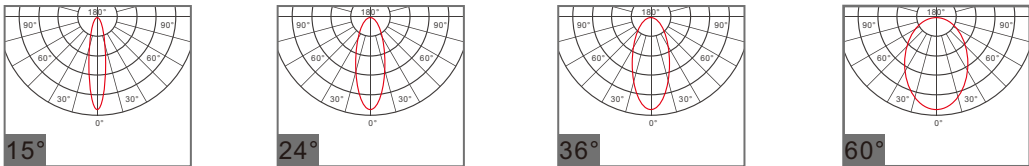



Code No.:DL509C-A

Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	15°	24°	36°	60°
Lumen	550LM	555LM	572LM	592LM
CRI	90/98			
IP	20			
Installation	Surface mounted			



White
Black





Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle




Code No.:DL509C-B

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	825LM	832LM	858LM	888LM
CRI	90/98			
IP	20			
Installation	Surface mounted			



White
Black





Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.:DL509B-A

Power	MAX 8W			
Voltage	AC 220~240V			
Current	200mA			
Angle	polarized			
Lumen	458LM			
CRI	90/98			
IP	20			
Installation	Surface mounted			



White
Black

Reflector





PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL509B-B

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	polarized			
Lumen	605LM			
CRI	90/98			
IP	20			
Installation	Surface mounted			



White
Black

Reflector





PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL509-D

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

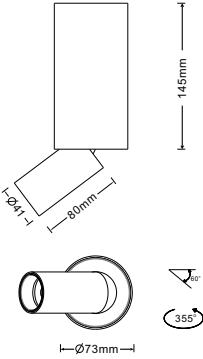





Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle




Fixed

Non adjustable angle

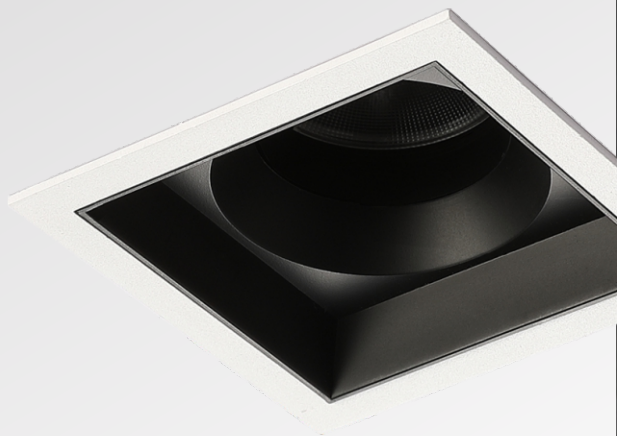

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



Tuya Dimming



High-power LED
SDCM<3



CRI>90



Anti-Glare






Code No.:DL101-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

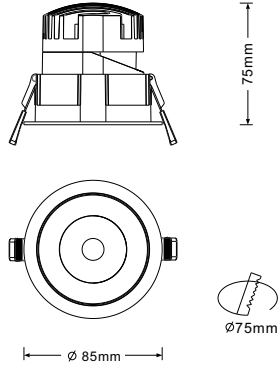

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

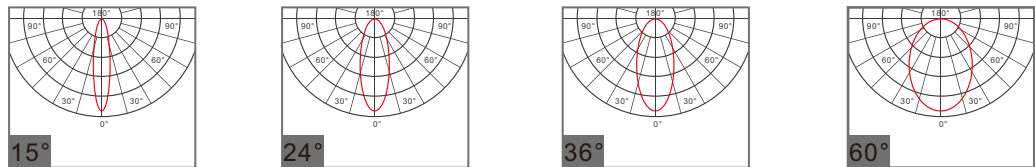


Code No.:DL101-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

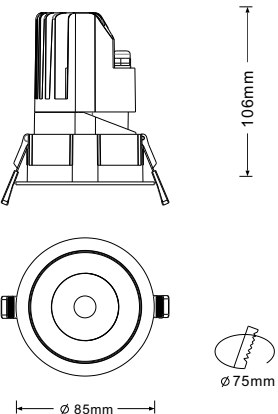

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

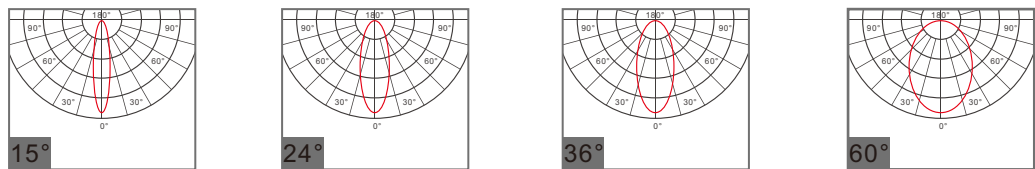


Code No.:DL101N-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

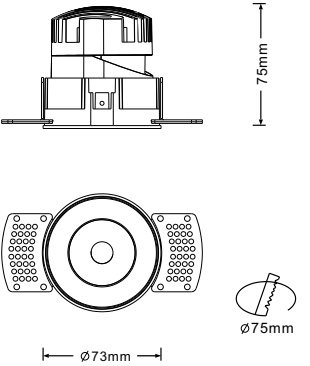

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

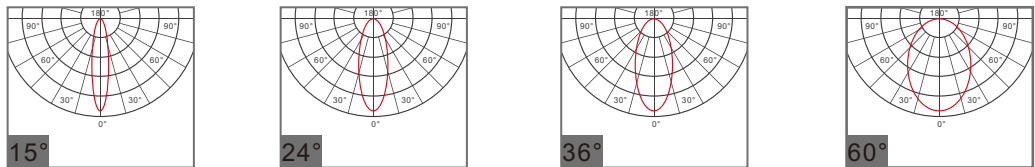


Code No.:DL101N-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			



Honey Comb Spread Lens Solite Lens

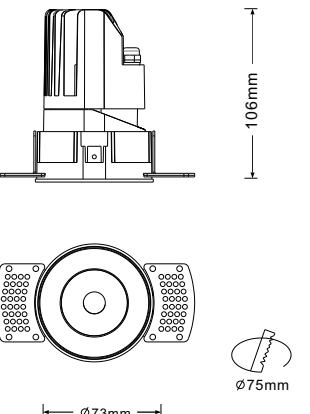

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K



Angle

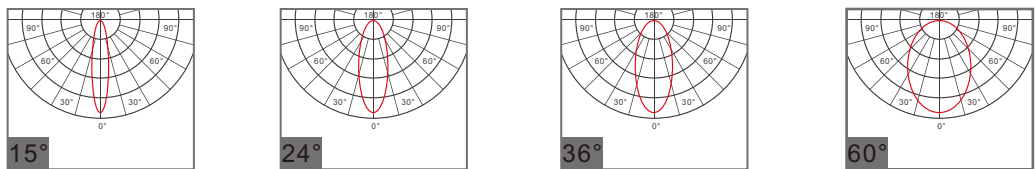



Code No.:DL101S-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			

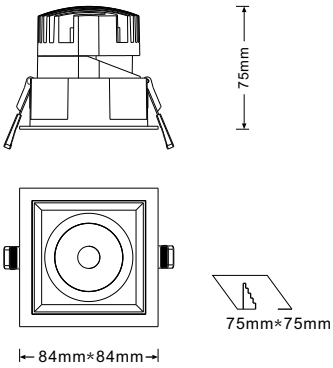


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

Angle

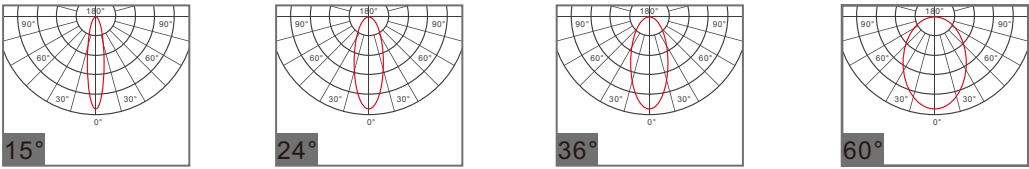

Code No.:DL101S-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

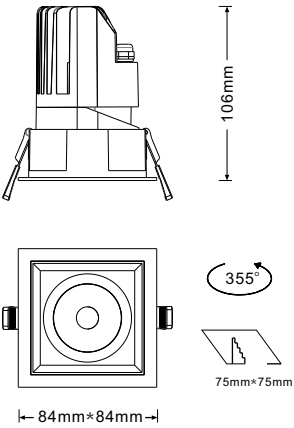



Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®


2700K / 3000K / 3500K / 4000K / 5000K

Angle

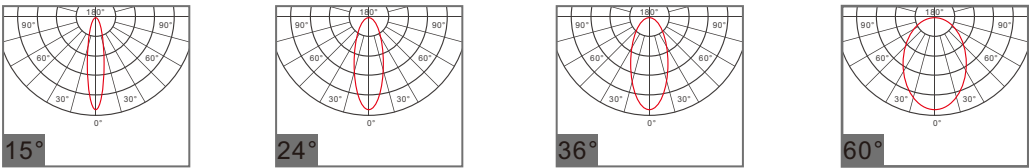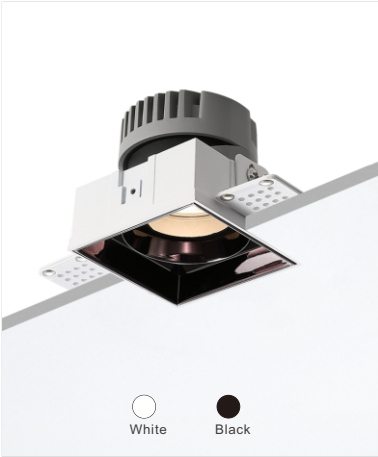

Code No.:DL101SN-A

Power	MAX 12W			
Voltage	AC 220~240V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	916LM	925LM	953LM	987LM
CRI	90/98			
IP	20			
Installation	Embedded			




Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®



2700K / 3000K / 3500K / 4000K / 5000K

Angle

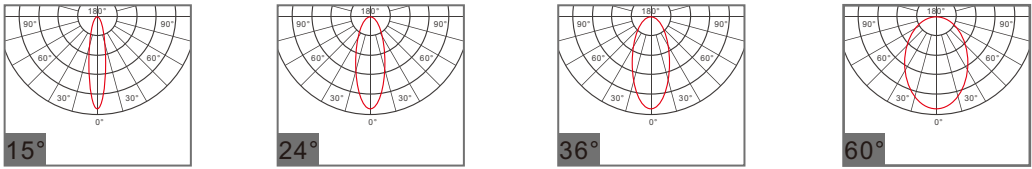


Code No.:DL101SN-B

Power	MAX 18W			
Voltage	AC 220~240V			
Current	450mA			
Angle	15°	24°	36°	60°
Lumen	1374LM	1387LM	1430LM	1480LM
CRI	90/98			
IP	20/54			
Installation	Embedded			

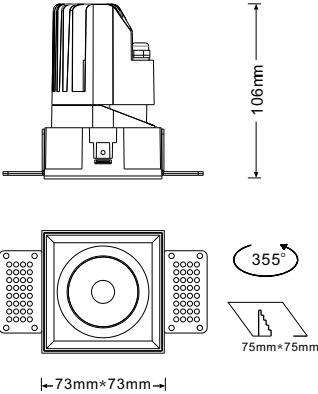

Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux®

2700K / 3000K / 3500K / 4000K / 5000K

Angle

