

AURO Series





LET YOUR GARDEN GROW AT NIGHT

Light is an extension of the garden. Designed for landscapes, the AURO series brings plants to life with soft, high-quality illumination that reveals their true colors. With flexible mounting options, the luminaires stay hidden in foliage or stone, allowing only the light to dance through the leaves. AURO transforms your garden into a living, breathing work of art—even after dark.

PRODUCT FEATURES

1 Ultra-Clear Tempered Glass

Utilizing ultra-clear tempered glass, the AURO series ensures exceptional transparency and zero distortion, delivering a pure and authentic visual experience.

2 High-Performance Optical Lens

Equipped with precision optical lenses featuring a high refractive index, the light output is uniform and bright, maximizing illumination efficiency while minimizing glare.

3 Robust AL6063 Aluminum Housing

Crafted from premium AL6063 aluminum via CNC machining, the body is treated with an electrostatic spray finish. This ensures superior corrosion resistance and durability for harsh outdoor environments.

4 Precision Angle Adjustment

Designed with a digital scale plate, the luminaire allows for precise beam adjustment from -35° to 90°. Achieve accurate lighting positioning with every turn.

5 IP-Rated Sealed Wiring

Featuring sealed power interfaces, the fixture offers outstanding water and dust resistance, ensuring long-term reliability and safety in any weather condition.

6 Rugged SUS304 Mounting Bracket

The stainless steel SUS304 mounting bracket provides exceptional load-bearing capacity and stability. Fully adjustable, it supports versatile installation methods across various terrains.



SUPERB COLOR FIDELITY



BUILT FOR ENDURING OUTDOOR PERFORMANCE



IK08

D88/D120

BUILT TO WITHSTAND PHYSICAL IMPACTS



AURO

ANTI-GLARE



BEYOND GLARE

True landscape lighting lies in seeing the light, not the source. AURO is engineered to shield the eyes from stray light, preserving the serenity of your garden after dark.

We achieve this through a triple-defense system: a deep-recessed optical cavity combined with both internal and external anti-glare accessories. This ensures a visually pure and comfortable environment.


Free from harsh distractions, the intricate textures of your garden can now shine through. AURO wraps your outdoor space in a soft, immersive glow, enhancing the tranquil atmosphere of the night.




Sloped Anti-Glare Hood




Straight Anti-Glare Hood




Cross Baffle Anti-Glare Hood



Linear Louver



Concentric Ring Baffle



Honeycomb Louver

AURO


SIZE

SINGLE DIODE LED & LENS

Φ28mm

Φ45mm

Φ56mm



Φ68mm

Φ86mm

Φ120mm



COB & LENS

Φ45mm

Φ56mm



Φ68mm

Φ86mm

Φ120mm



AURO

OPTICS



COB & LENS

This system integrates a COB (Chip-on-Board) light source with a high-performance optical lens. It creates a uniform luminous surface that transforms raw light into a soft, even wash or a smooth focal point, successfully balancing high luminous efficacy with superior visual comfort for a wide range of architectural and commercial settings.




SINGLE DIODE LED & LENS

This system pairs a discrete SINGLE DIODE LED with a precision optical lens. The combination acts as a point source for calculated optics, enabling exceptional control over beam angle, shape, and intensity. It delivers sharp, focused illumination, offering versatile solutions for precise accent lighting, narrow beam applications, and advanced color mixing.

SINGLE DIODE LED & LENS



COB & LENS

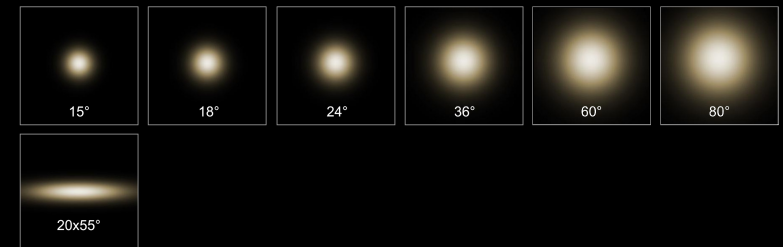

MOUNTING OPTIONS



Wall-Mounted



Aluminum Pole
Ground Spike



Telescoping
Aluminum Pole Base



Aluminum
Pole Base



Aluminum
Ground Spike



Polyester
Tree Straps



Stainless Steel
Tree Straps



Telescoping Aluminum
Pole Ground Spike



Aluminum
Ground Spike

LIGHTING EFFECT

TRUE COLOR, REVEALED

AURO features high CRI for precise color fidelity. It reveals the true colors of landscapes and materials at night, adding depth and texture to the space.

55-Light and Art

PERFORMANCE



RAIN OR SHINE

From scorching sun to pouring rain, AURO is built to endure. The combination of IP66 protection, sealed power interfaces, and a durable, rust-proof housing ensures that nothing distracts from the light. Let your garden grow at night, safely and beautifully, through every season.

Light and Art-56




AURO D28

OUTDOOR PROJECTORS



Sample Image



Physical Dimension(MM)




Model	INV-11AR28LL-1
POWER	DC:Max 2.5W
INPUT VOLTAGE	DC:MAX 3V 800mA
LED COLOUR	Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K
CONTROL MODE	ON/OFF
BEAM ANGLIE	Single 15° 20° 25° 38° 60° 20°40°
CRI	CRI80 CRI > 90
LED QUANTITY	1PCS
PROTECTION GRADE	IP66


AURO D45

OUTDOOR PROJECTORS

AURO

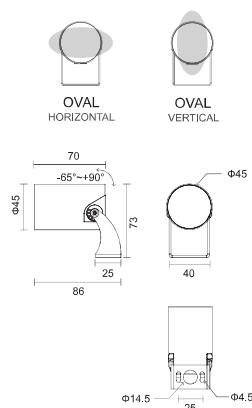

Physical Dimension(MM)

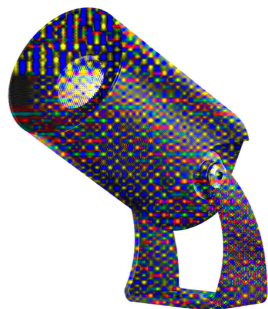

SINGLE DIODE LED & LENS



COB & LENS



Model	INV-11AR45LL-1
POWER	■ DC:Max 5W
INPUT VOLTAGE	■ DC24V
LED COLOUR	<ul style="list-style-type: none"> ■ Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K ■ Tunable White CCT:2700K-6000K ■ RGB/RGBW(Max 2W)
CONTROL MODE	<ul style="list-style-type: none"> ■ ON/OFF ■ 0-10V ■ DALI ■ Traic ■ DMX512
BEAM ANGLE	<ul style="list-style-type: none"> ■ Single 6° 8° 11° (Only Max 3W) 16° 20° 25° 30° 36° 45° 58° 90° 120° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60° ■ Tunable White And RGB/RGBW 12° 15° 25° 36° 45° 60° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60°
CRI	<ul style="list-style-type: none"> ■ CRI80 ■ CRI > 90
LED QUANTITY	1PCS
PROTECTION GRADE	IP66

Model	INV-11AR45CL-1
POWER	■ DC:MAX 5W
INPUT VOLTAGE	■ DC24V
LED COLOUR	<ul style="list-style-type: none"> ■ Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K ■ Tunable White CCT:2700K-6000K
CONTROL MODE	<ul style="list-style-type: none"> ■ ON/OFF ■ 0-10V ■ DALI ■ Traic ■ DMX512
BEAM ANGLE	<ul style="list-style-type: none"> ■ Single 15° 24° 36° 60° ■ Tunable White 15° 24° 36° 60°
CRI	<ul style="list-style-type: none"> ■ CRI80 ■ CRI > 90
LED QUANTITY	1PCS
PROTECTION GRADE	IP66





AURO D56

OUTDOOR PROJECTORS




Model	INV-11AR56LL-1	INV-11AR56CL-1
POWER	<ul style="list-style-type: none"> AC:3W 5W 6W DC:Max 7W 	<ul style="list-style-type: none"> AC:4W 7W DC:MAX 7W
INPUT VOLTAGE	<ul style="list-style-type: none"> AC110~240V AC220~240V DC24V 	<ul style="list-style-type: none"> AC110~240V AC220~240V DC24V
LED COLOUR	<ul style="list-style-type: none"> Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K Tunable white CCT:2700K-6000K RGB/RGBW(Max 4W) 	<ul style="list-style-type: none"> Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K Tunable white CCT:2700K-6000K
CONTROL MODE	<ul style="list-style-type: none"> ON/OFF 0-10V DALI Traic DMX512 	<ul style="list-style-type: none"> ON/OFF 0-10V DALI Traic DMX512
BEAM ANGLIE	<ul style="list-style-type: none"> Single 6° 10°(Only AC:3W DC:Max 4W) 15° 30° 45° 60° 10X20° 10X30° 10X45° Tunable White And RGB/RGBW 6° 10° 15° 30° 45° 60° 12X20° 12X30° 12X45° 	<ul style="list-style-type: none"> Single 18° 24° 36° 60° 20X55° Tunable White 18° 24° 36° 60° 20X55°
CRI	<ul style="list-style-type: none"> CRI80 CRI > 90 	<ul style="list-style-type: none"> CRI80 CRI > 90
LED QUANTITY	1PCS	1PCS
PROTECTION GRADE	IP66	IP66

AURO D68

OUTDOOR PROJECTORS

AURO

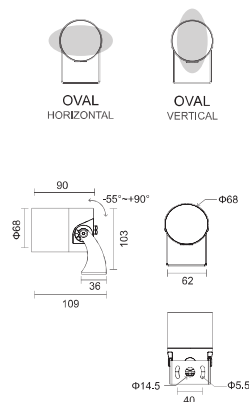

Physical Dimension(MM)



SINGLE DIODE LED & LENS




COB & LENS



Model	INV-11AR68LL-4
POWER	<ul style="list-style-type: none"> ■ AC:8W 10W 12W ■ DC:Max 12W
INPUT VOLTAGE	<ul style="list-style-type: none"> ■ AC110~240V ■ AC220~240V ■ DC24V
LED COLOUR	<ul style="list-style-type: none"> ■ Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K ■ Tunable white CCT:2700K-6000K ■ RGB/RGBW(Max 15W)
CONTROL MODE	<ul style="list-style-type: none"> ■ ON/OFF ■ 0-10V ■ DALI ■ Traic ■ DMX512
BEAM ANGLE	<ul style="list-style-type: none"> ■ Single 6° 8° 11° 16° 20° 25° 30° 36° 45° 58° 90° 120° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60° ■ Tunable White And RGB/RGBW 12° 15° 25° 36° 45° 60° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60°
CRI	<ul style="list-style-type: none"> ■ CRI80 ■ CRI > 90
LED QUANTITY	4PCS
PROTECTION GRADE	IP66


Model	INV-11AR68CL-1
POWER	<ul style="list-style-type: none"> ■ AC:8W 10W 12W ■ DC:MAX 12W
INPUT VOLTAGE	<ul style="list-style-type: none"> ■ AC110~240V ■ AC220~240V ■ DC24V
LED COLOUR	<ul style="list-style-type: none"> ■ Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K ■ Tunable White CCT:2700K-6000K
CONTROL MODE	<ul style="list-style-type: none"> ■ ON/OFF ■ 0-10V ■ DALI ■ Traic ■ DMX512
BEAM ANGLE	<ul style="list-style-type: none"> ■ Single 15° 24° 36° 60° 80° 20X55° ■ Tunable White 15° 24° 36° 60° 80° 20X55°
CRI	<ul style="list-style-type: none"> ■ CRI80 ■ CRI > 90
LED QUANTITY	1PCS
PROTECTION GRADE	IP66

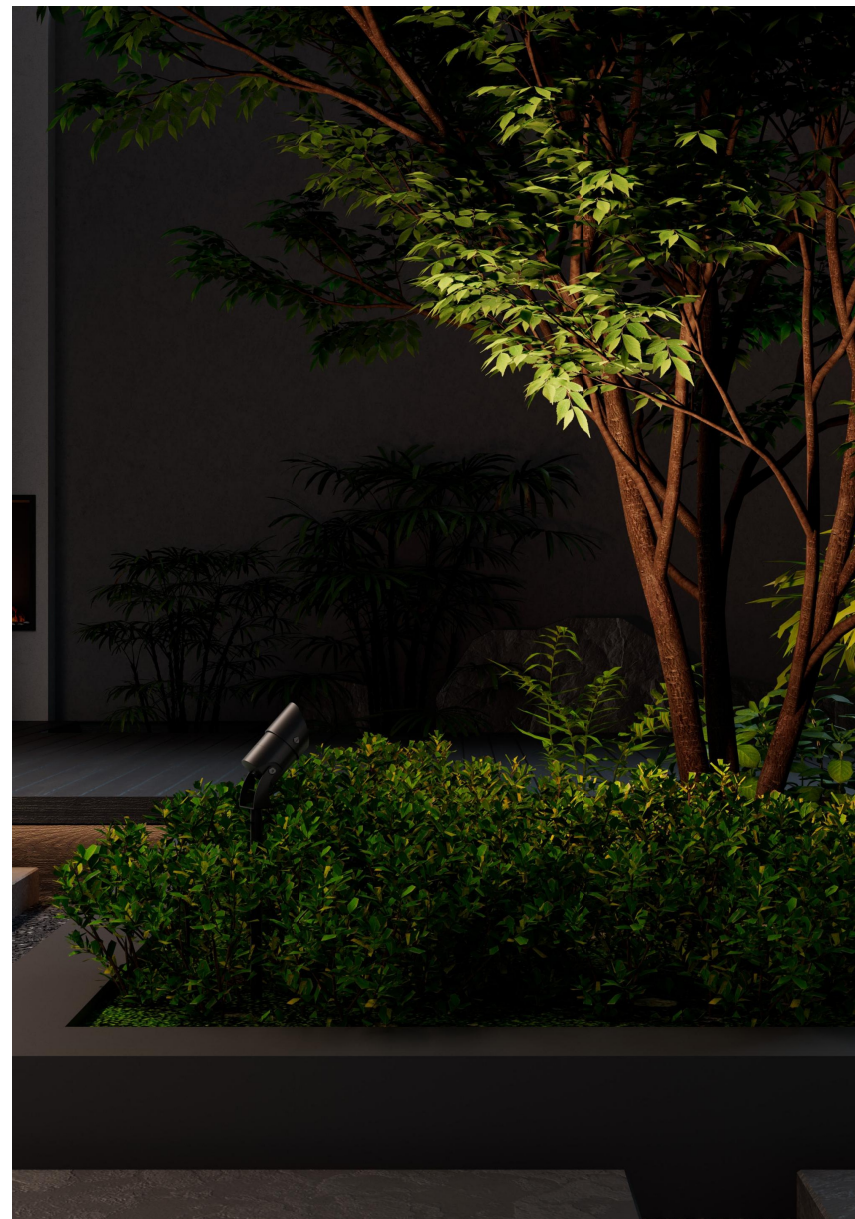



AURO D86

OUTDOOR PROJECTORS

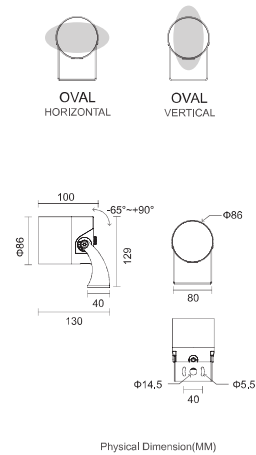

SINGLE DIODE LED & LENS




COB & LENS



Model	INV-11AR86LL-6	INV-11AR86ACL-1
◆ POWER	<ul style="list-style-type: none"> ■ AC:12W 15W ■ DC:MAX 18W 	<ul style="list-style-type: none"> ■ AC:15W 18W ■ DC:MAX 18W
◆ INPUT VOLTAGE	<ul style="list-style-type: none"> ■ AC110~240V ■ AC220~240V ■ DC24V 	<ul style="list-style-type: none"> ■ AC110~240V ■ AC220~240V ■ DC24V
◆ LED COLOUR	<ul style="list-style-type: none"> ■ Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K ■ Tunable white CCT:2700K-6000K ■ RGB/RGBW(Max 24W) 	<ul style="list-style-type: none"> ■ Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K ■ Tunable white CCT:2700K-6000K
◆ CONTROL MODE	<ul style="list-style-type: none"> ■ ON/OFF ■ 0-10V ■ DALI ■ Traic ■ DMX512 	<ul style="list-style-type: none"> ■ ON/OFF ■ 0-10V ■ DALI ■ Traic ■ DMX512
◆ BEAM ANGLE	<ul style="list-style-type: none"> ■ Single 6° 8° 11° 16° 20° 25° 30° 36° 45° 58° 90° 120° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60° ■ Tunable White And RGB/RGBW 12° 15° 25° 36° 45° 60° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60° 	<ul style="list-style-type: none"> ■ Single 15° 24° 36° 60° 80° 20X55° ■ Tunable White 15° 24° 36° 60° 80° 20X55°
◆ CRI	<ul style="list-style-type: none"> ■ CRI80 ■ CRI > 90 	<ul style="list-style-type: none"> ■ CRI80 ■ CRI > 90
LED QUANTITY	6PCS	1PCS
PROTECTION GRADE	IP66	IP66

AURO D120

OUTDOOR PROJECTORS

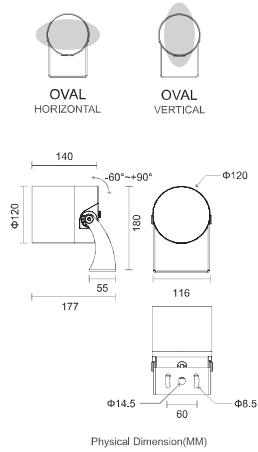

SINGLE DIODE LED & LENS



COB & LENS



Model	INV-11AR120LL-12
POWER	<ul style="list-style-type: none"> AC:24W 30W DC:Max 32W
INPUT VOLTAGE	<ul style="list-style-type: none"> AC110~240V AC220~240V DC24V
LED COLOUR	<ul style="list-style-type: none"> Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K Tunable White CCT:2700K-6000K RGB/RGBW (Max 40W)
CONTROL MODE	<ul style="list-style-type: none"> ON/OFF 0-10V DALI Traic DMX512
BEAM ANGLE	<ul style="list-style-type: none"> Single 6° 8° 11° 16° 20° 25° 30° 36° 45° 58° 90° 120° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60° Tunable White And RGB/RGBW 12° 15° 25° 36° 45° 60° 10x20° 10x45° 10x60° 15x30° 20x45° 20x60°
CRI	<ul style="list-style-type: none"> CRI80 CRI > 90
LED QUANTITY	12PCS
PROTECTION GRADE	IP66

Model	INV-11AR120CL-1
POWER	<ul style="list-style-type: none"> AC:24W 30W DC:Max 30W
INPUT VOLTAGE	<ul style="list-style-type: none"> AC110~240V AC220~240V DC24V
LED COLOUR	<ul style="list-style-type: none"> Single 2200K 2700K 3000K 3500K 4000K 5000K 5700K 6500K Tunable white CCT:2700K-6000K
CONTROL MODE	<ul style="list-style-type: none"> ON/OFF 0-10V DALI Traic DMX512
BEAM ANGLE	<ul style="list-style-type: none"> Single 15° 24° 36° 60° 80° 20X55° Tunable White 15° 24° 36° 60° 80° 20X55°
CRI	<ul style="list-style-type: none"> CRI80 CRI > 90
LED QUANTITY	1PCS
PROTECTION GRADE	IP66




AURO-GLARE CONTROL

ACCESSORIES

Sloped Anti-Glare Hood




Straight Anti-Glare Hood

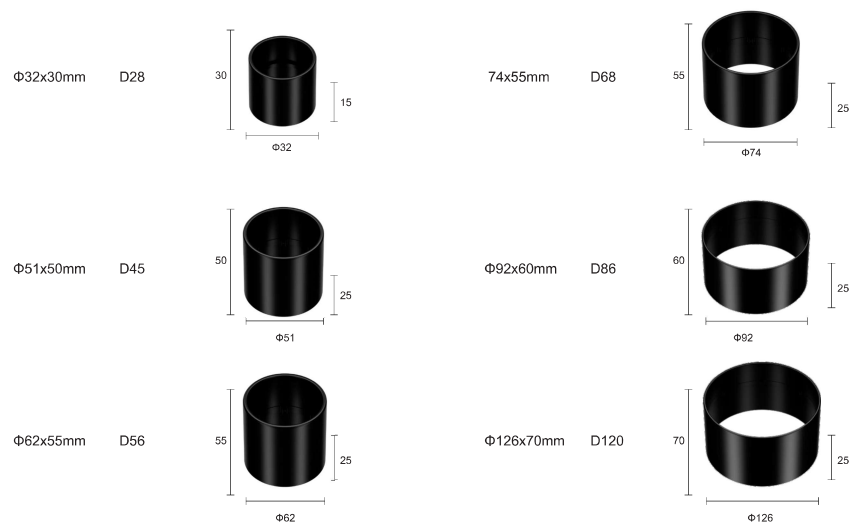


AURO-GLARE CONTROL

ACCESSORIES

Cross Baffle Anti-Glare Hood

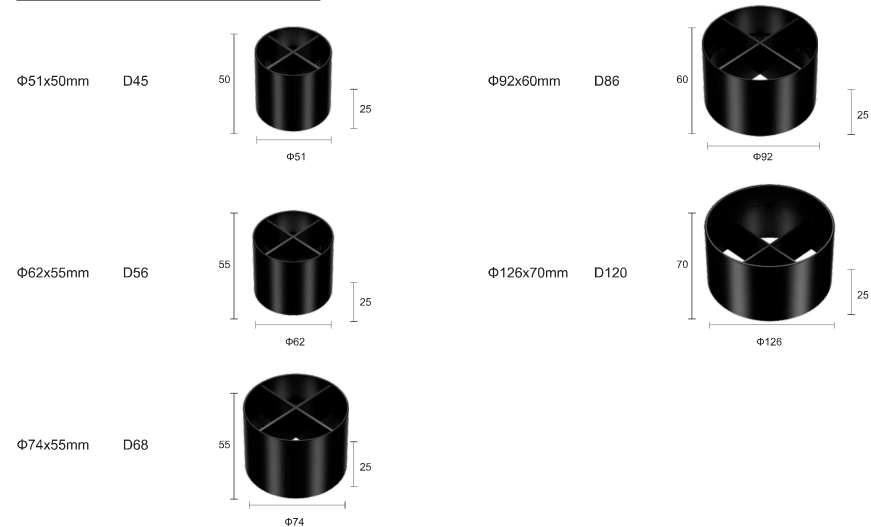


Internal Anti-Glare Accessories




Honeycomb Louver

- AURO D28
- AURO D45
- AURO D56
- AURO D68
- AURO D86
- AURO D120



Concentric Ring Baffle

- AURO D45
- AURO D56
- AURO D68
- AURO D86
- AURO D120




Linear Louver

- AURO D45
- AURO D56
- AURO D68
- AURO D86
- AURO D120


AURO-MOUNTING OPTIONS

ACCESSORIES

Aluminum Ground Spike




- AURO D45
- AURO D56
- AURO D68




- AURO D86
- AURO D120

Aluminum Pole Base



- AURO D45
- AURO D56
- AURO D68
- AURO D86




Telescoping Aluminum Pole Base

- AURO D45
- AURO D56
- AURO D68
- AURO D86


AURO-MOUNTING OPTIONS

ACCESSORIES



Aluminum Pole Ground Spike


- AURO D45
- AURO D56
- AURO D68
- AURO D86



Telescoping Aluminum Pole Ground Spike

- AURO D45
- AURO D56
- AURO D68
- AURO D86

Tree Mounted



Tree Mount Bracket

- AURO D45
- AURO D56
- AURO D68
- AURO D86
- AURO D120



Polyester Tree Straps



Stainless Steel Tree Straps