## Code No.: DM001N

| | | | |
|---|---|---|---|
| Power | MAX 3W | | |
| Voltage | 3V | | |
| Current | 700mA | | |
| Angle | 15° | 24° | 36° |
| Lumen | 180LM | 195LM | 205LM |
| CRI | 90 | | |
| IP | 20 | | |
| Installation | Embedded | | |




SMD

LUMINUS CREE bridgelux OSRAM

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DM001

| | | | |
|---|---|---|---|
| Power | MAX 3W | | |
| Voltage | 3V | | |
| Current | 700mA | | |
| Angle | 15° | 24° | 36° |
| Lumen | 180LM | 195LM | 205LM |
| CRI | 90 | | |
| IP | 20 | | |
| Installation | Embedded | | |




SMD

LUMINUS CREE bridgelux OSRAM

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.:DM002N

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 916LM | 925LM | 953LM | 987LM |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |

Honey Comb Spread Lens Solite Lens




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

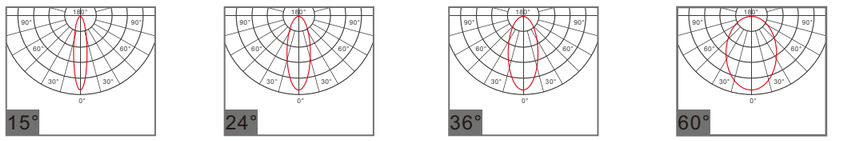

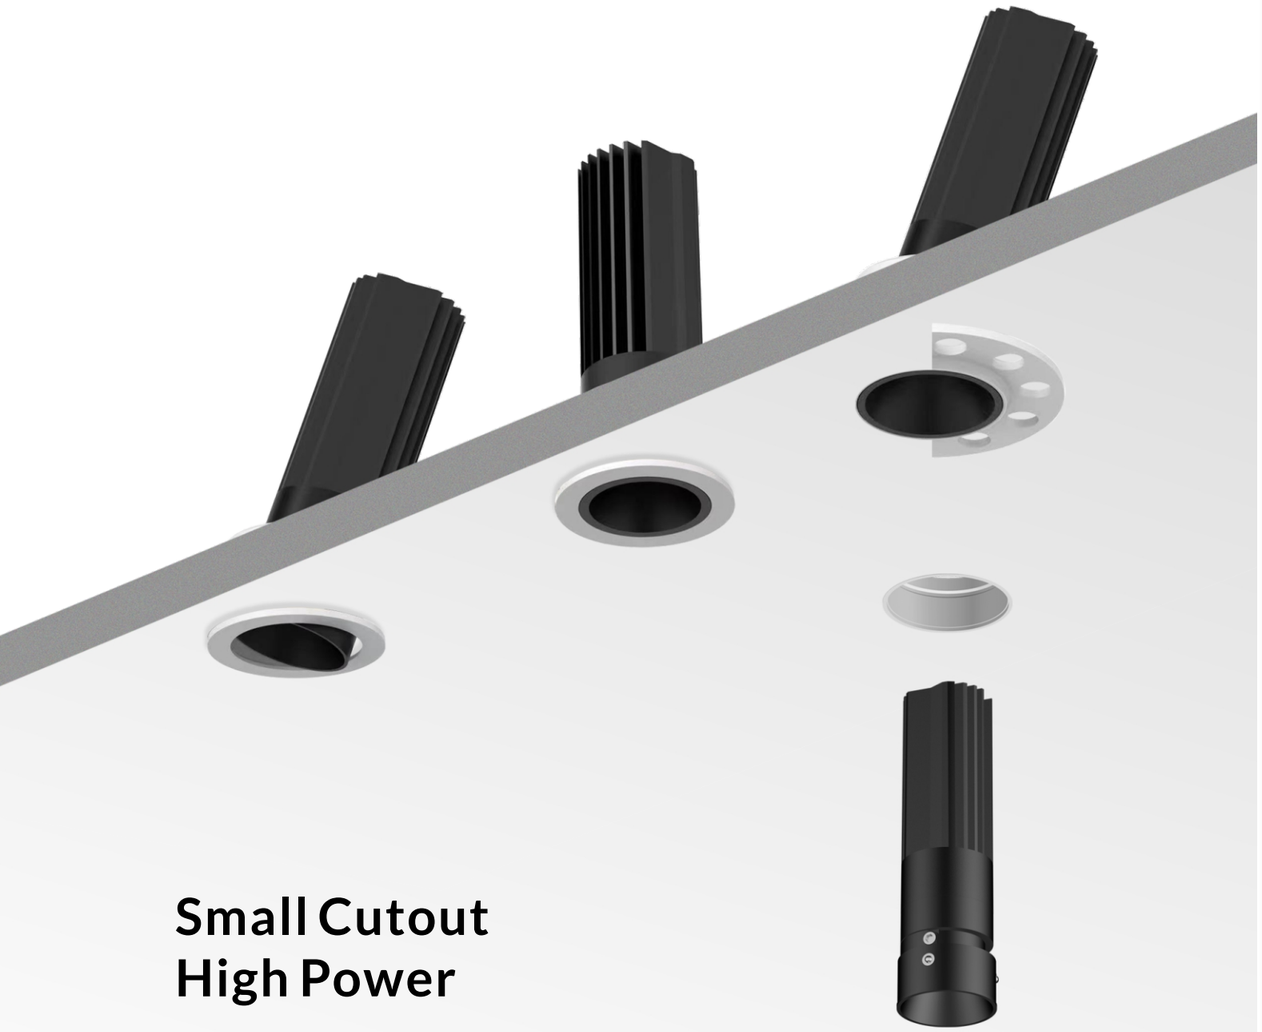

# Small Cutout
# High Power



SCR Dimming | 0-10V Dimming | DALI Dimming | Bluetooth Dimming | Tuya Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

Code No.: DM003

| | | | | |
|---|---|---|---|---|
| Power | MAX 7W | | | |
| Voltage | 3V | | | |
| Current | 1500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 420LM | 435LM | 450LM | 462LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb | Spread Lens | Solite Lens

SMD **LUMINUS**

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.: DM004

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 896LM | 905LM | 913LM | 922LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb | Spread Lens | Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.:DM003A

| | | | | |
|---|---|---|---|---|
| Power | MAX 7W | | | |
| Voltage | 3V | | | |
| Current | 1500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 420LM | 435LM | 450LM | 462LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

**LUMINUS**

2700K / 3000K / 3500K / 4000K / 5000K

Angle












## Code No.:DM003N

| | | | | |
|---|---|---|---|---|
| Power | MAX 7W | | | |
| Voltage | 3V | | | |
| Current | 1500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 420LM | 435LM | 450LM | 462LM |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

**LUMINUS**

2700K / 3000K / 3500K / 4000K / 5000K

Angle












## Code No.: DM004A

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 896LM | 905LM | 913LM | 922LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

**PHILIPS** **LUMINUS** CITIZEN **CREE** bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle















## Code No.:DM004N

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 896LM | 905LM | 913LM | 922LM |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

**PHILIPS** **LUMINUS** CITIZEN **CREE** bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle












# Pinhole Lamp

Deep Focal Length Anti-Glare Trim Design UGR < 9

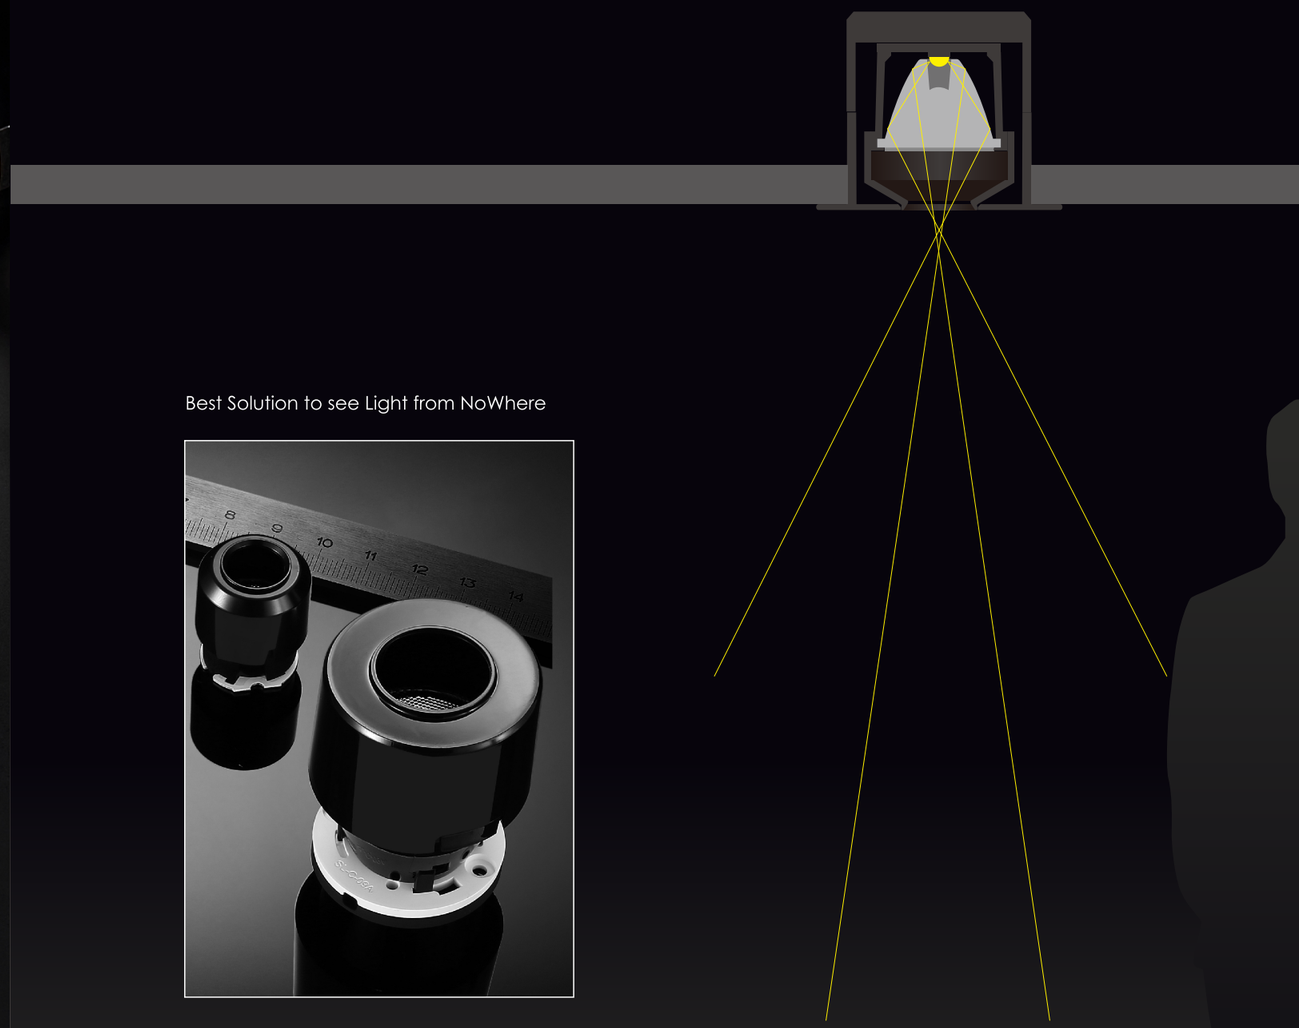

Best Solution to see Light from NoWhere





WWW.RGPLED.COM

## Code No.:DM005A

| | |
|---|---|
| Power | MAX 3W |
| Voltage | 3V |
| Current | 700mA |
| Angle | 24° 36° |
| Lumen | 180LM 190LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |




SMD LUMINUS CREE bridgelux OSRAM

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.:DM005C

| | |
|---|---|
| Power | MAX 8W |
| Voltage | 36V |
| Current | 200mA |
| Angle | 24° 36° |
| Lumen | 580LM 605LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle






## Code No.: DM005B

| | |
|---|---|
| Power | MAX 6W |
| Voltage | 36V |
| Current | 150mA |
| Angle | 24° 36° |
| Lumen | 370LM 390LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DM005D

| | |
|---|---|
| Power | MAX 12W |
| Voltage | 36V |
| Current | 300mA |
| Angle | 24° 36° |
| Lumen | 780LM 815LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle






# Small Cutout
# Retractable Spotlight

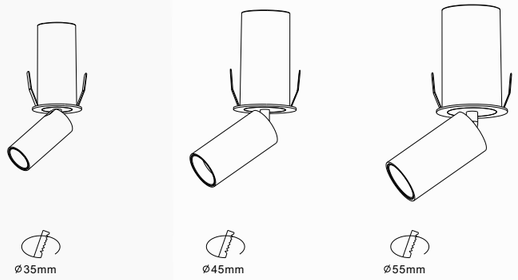


SCR Dimming | 0-10V Dimming | DALI Dimming | Bluetooth Dimming | Tuya Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

## Code No.: DF005

| | | | |
|---|---|---|---|
| Power | MAX 3W | | |
| Voltage | 36V | | |
| Current | 100mA | | |
| Angle | 15° | 24° | 36° |
| Lumen | 190LM | 230LM | 310LM |
| CRI | 90 | | |
| IP | 20 | | |
| Installation | Embedded | | |



Honey Comb | Spread Lens | Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

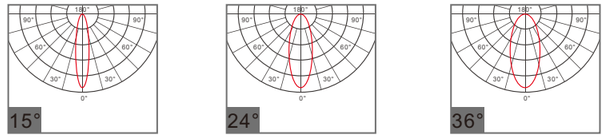

## Code No.: DF006

| | | | | |
|---|---|---|---|---|
| Power | MAX 6W | | | |
| Voltage | 36V | | | |
| Current | 150mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 370LM | 390LM | 415LM | 420LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb | Spread Lens | Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

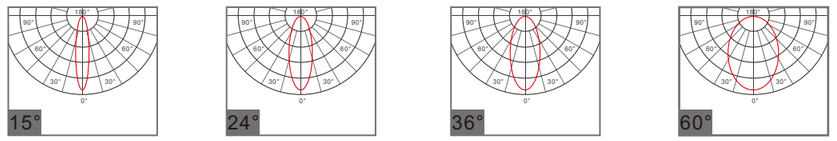

## Code No.: DF007

| | | | | |
|---|---|---|---|---|
| Power | MAX 8W | | | |
| Voltage | 36V | | | |
| Current | 200mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 650LM | 700LM | 720LM | 780LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle















SCR Dimming | 0-10V Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

## Code No.:DE101

| | | | |
|---|---|---|---|
| Power | MAX 4W | | |
| Voltage | 36V | | |
| Current | 100mA | | |
| Angle | 15° | 24° | 36° |
| Lumen | 190LM | 230LM | 310LM |
| CRI | 90 | | |
| IP | 20 | | |
| Installation | Surface mounted | | |



Honey Comb | Spread Lens | Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle




## Code No.: DE102

| | | | | |
|---|---|---|---|---|
| Power | MAX 6W | | | |
| Voltage | 36V | | | |
| Current | 150mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 370LM | 390LM | 415LM | 420LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |






Honey Comb | Spread Lens | Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



# ULTRA THIN

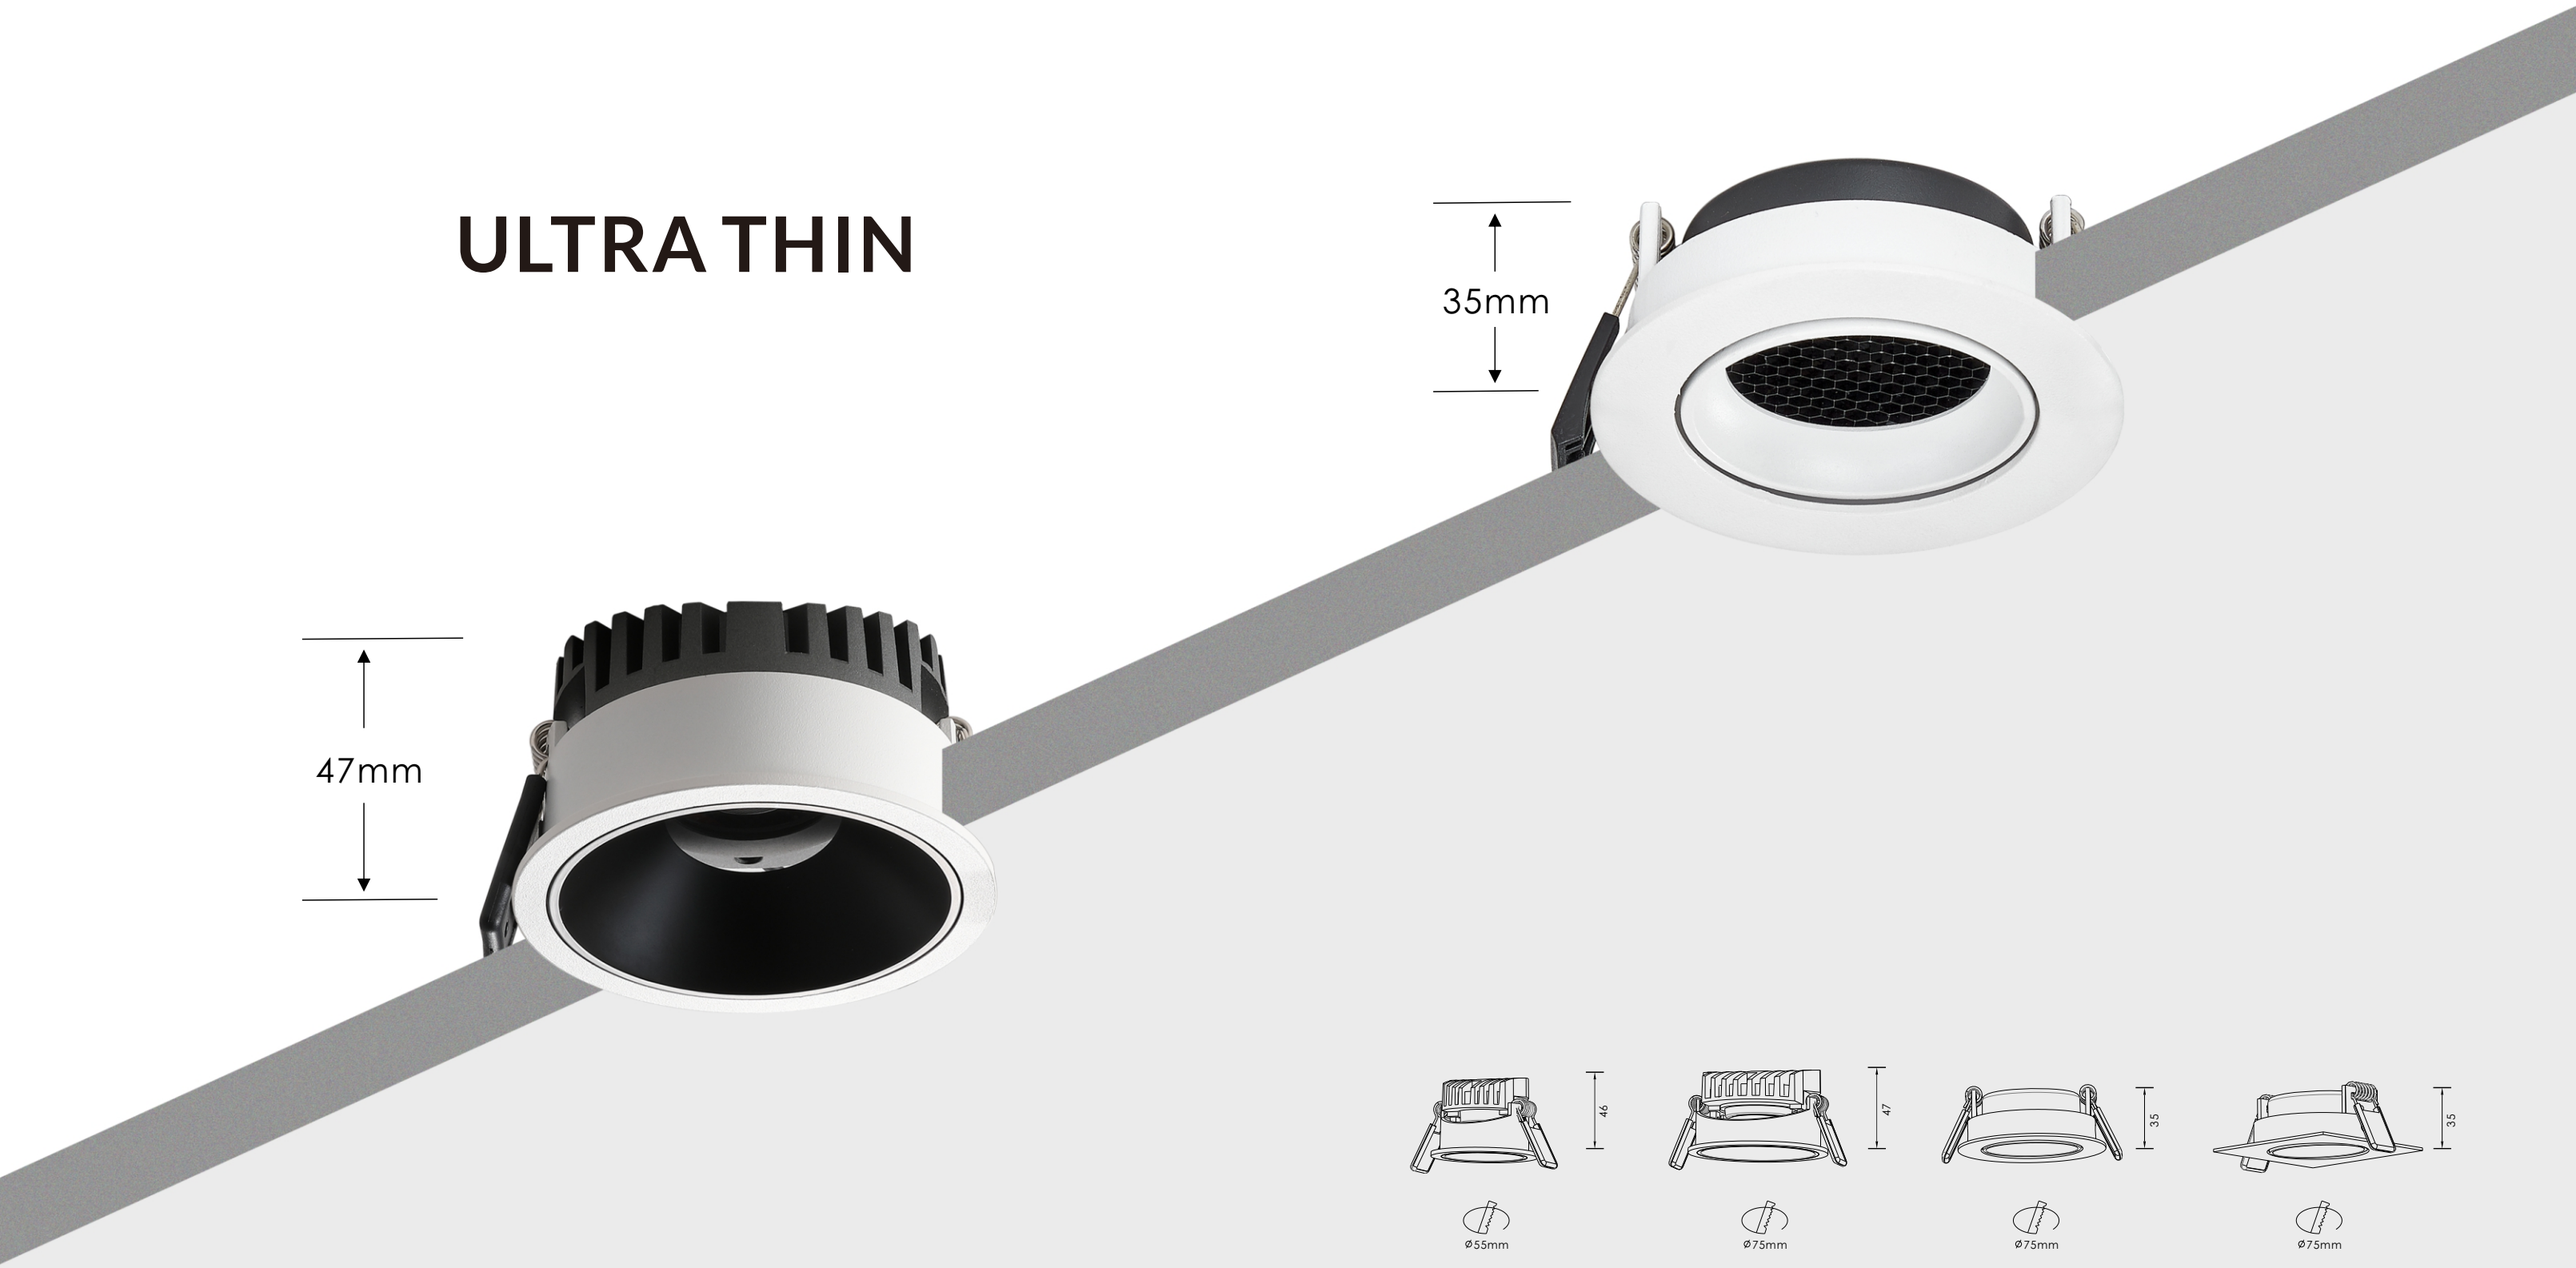





SCR Dimming | 0-10V Dimming | DALI Dimming | Bluetooth Dimming | Tuya Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

## Code No.: DK011

| | | | | |
|---|---|---|---|---|
| Power | MAX 6W | | | |
| Voltage | 36V | | | |
| Current | 150mA | | | |
| Angle | 15° | 24° | 36° | |
| Lumen | 475LM | 493LM | 505LM | |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Reflector



Angle



## Code No.: DK009

| | | | | |
|---|---|---|---|---|
| Power | MAX 10W | | | |
| Voltage | 36V | | | |
| Current | 250mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 788LM | 797LM | 815LM | 831LM |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Angle



## Code No.: DK012

| | | | | |
|---|---|---|---|---|
| Power | MAX 10W | | | |
| Voltage | 36V | | | |
| Current | 250mA | | | |
| Angle | 15° | 24° | 36° | |
| Lumen | 788LM | 797LM | 815LM | |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |






Reflector



Angle



## Code No.: DK009S

| | | | | |
|---|---|---|---|---|
| Power | MAX 10W | | | |
| Voltage | 36V | | | |
| Current | 250mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 788LM | 797LM | 815LM | 831LM |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |






Angle



## Code No.: DK001

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1052LM | 1083LM | 1095LM | 1108LM |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle












## Code No.: DK001S

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1052LM | 1083LM | 1095LM | 1108LM |
| CRI | 90/98 | | | |
| IP | 20/54 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle












## Code No.: DK013

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 856LM | 877LM | 893LM | 906LM |
| CRI | 90/98 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle












Subject separation

SCR Dimming | 0-10V Dimming | DALI Dimming | Bluetooth Dimming | Tuya Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

## Code No.: DC001

| | | | | |
|---|---|---|---|---|
| Power | MAX 15W | | | |
| Voltage | 36V | | | |
| Current | 350mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1350LM | 1370LM | 1395LM | 1406LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DC002

| | | | | |
|---|---|---|---|---|
| Power | MAX 20W | | | |
| Voltage | 36V | | | |
| Current | 500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1558LM | 1577LM | 1585LM | 1609LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.: DC003

| | | | | |
|---|---|---|---|---|
| Power | MAX 35W | | | |
| Voltage | 36V | | | |
| Current | 800mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 2950LM | 3150LM | 3210LM | 3215LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |







PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



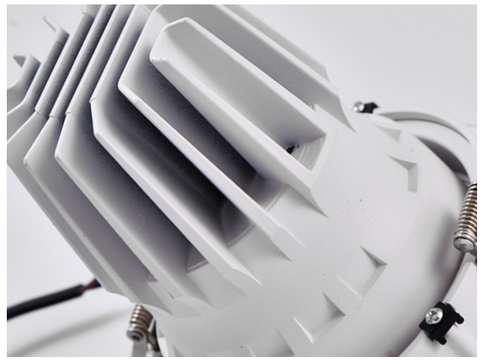

## Code No.: DC004

| | |
|---|---|
| Power | MAX 38W |
| Voltage | 36V |
| Current | 900mA |
| Angle | 15° 24° 36° |
| Lumen | 3210LM 3320LM 3340LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |




Reflector

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle




## Code No.: DC005

| | |
|---|---|
| Power | MAX 50W |
| Voltage | 36V |
| Current | 1100mA |
| Angle | 15° 24° 36° |
| Lumen | 4210LM 4320LM 4340LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |




Reflector

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



SCR Dimming | 0-10V Dimming | DALI Dimming | Bluetooth Dimming | Tuya Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

# Rotatable Gimble Downlight



SCR Dimming

0-10V Dimming

DALI Dimming

Bluetooth Dimming

Tuya Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

## Code No.:DA001

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 916LM | 925LM | 953LM | 987LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DA002

| | | | | |
|---|---|---|---|---|
| Power | MAX 20W | | | |
| Voltage | 36V | | | |
| Current | 500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1558LM | 1577LM | 1585LM | 1609LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DA003

| | |
|---|---|
| Power | MAX 30W |
| Voltage | 36V |
| Current | 700mA |
| Angle | 15° 24° 36° 60° |
| Lumen | 2910LM 3023LM 3142LM 3166LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DA004

| | |
|---|---|
| Power | MAX 38W |
| Voltage | 36V |
| Current | 900mA |
| Angle | 15° 24° 36° |
| Lumen | 3213LM 3325LM 3346LM |
| CRI | 90/98 |
| IP | 20 |
| Installation | Embedded |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

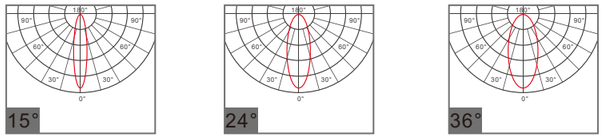

## Code No.: DA005

| | |
|---|---|
| Power | MAX 60W |
| Voltage | 36V |
| Current | 1300mA |
| Angle | 15° 24° 36° |
| Lumen | 5210LM 5320LM 5340LM |
| CRI | 90 |
| IP | 20 |
| Installation | Embedded |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

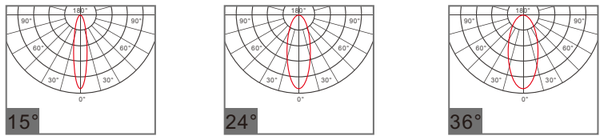


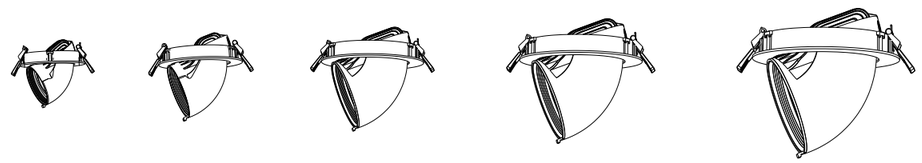



SCR Dimming

0-10V Dimming

DALI Dimming

Bluetooth Dimming

Tuya Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

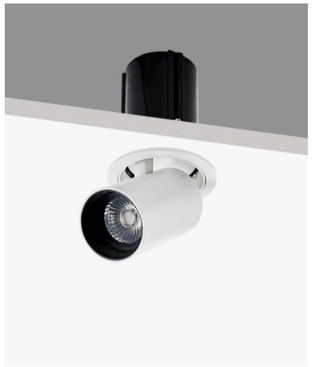

## Code No.: DF002

| | | | | |
|---|---|---|---|---|
| Power | MAX 15W | | | |
| Voltage | 36V | | | |
| Current | 350mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1275LM | 1306LM | 1321LM | 1343LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |







PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DF003

| | | | | |
|---|---|---|---|---|
| Power | MAX 20W | | | |
| Voltage | 36V | | | |
| Current | 500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1758LM | 1777LM | 1785LM | 1809LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

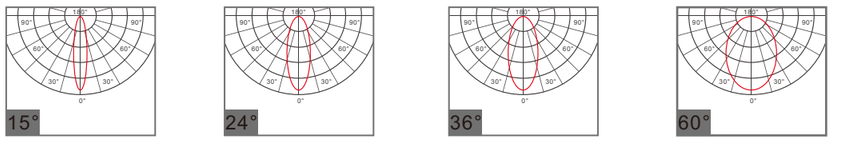




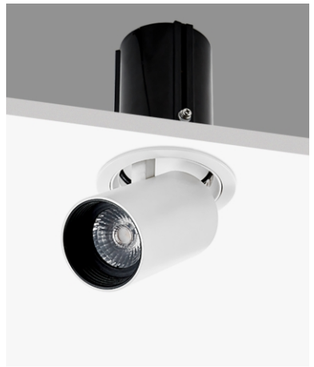

## Code No.: DF004

| | | | | |
|---|---|---|---|---|
| Power | MAX 30W | | | |
| Voltage | 36V | | | |
| Current | 700mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 2910LM | 3023LM | 3142LM | 3166LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

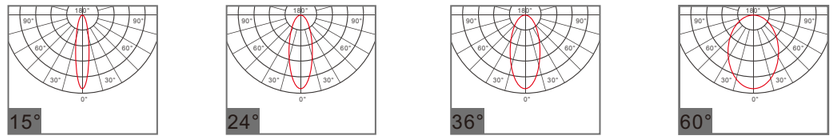

## Surface mounted

## Embedded

SCR Dimming

0-10V Dimming

DALI Dimming

Bluetooth Dimming

Tuya Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

## Code No.: DE001

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1025LM | 1083LM | 1102LM | 1119LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DE003

| | | | | |
|---|---|---|---|---|
| Power | MAX 25W | | | |
| Voltage | 36V | | | |
| Current | 600mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 2150LM | 2245LM | 2343LM | 2356LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DE002

| | | | | |
|---|---|---|---|---|
| Power | MAX 17W | | | |
| Voltage | 36V | | | |
| Current | 450mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1475LM | 1498LM | 1515LM | 1532LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Embedded | | | |







PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

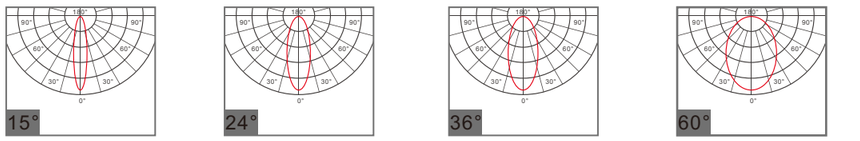

## Code No.: DE105

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1025LM | 1083LM | 1102LM | 1119LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

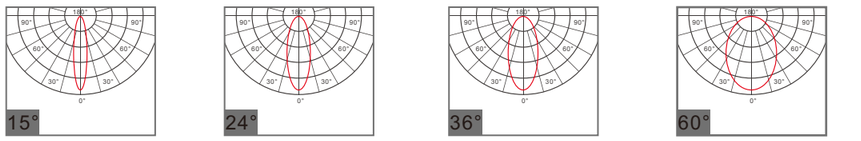

## Code No.:DE106

| | | | | |
|---|---|---|---|---|
| Power | MAX 17W | | | |
| Voltage | 36V | | | |
| Current | 450mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1475LM | 1498LM | 1515LM | 1532LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle













## Code No.: DE107

| | | | | |
|---|---|---|---|---|
| Power | MAX 25W | | | |
| Voltage | 36V | | | |
| Current | 600mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 2150LM | 2245LM | 2343LM | 2356LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle












## Code No.: DQ001

| | | | | |
|---|---|---|---|---|
| Power | MAX 10W | | | |
| Voltage | 36V | | | |
| Current | 250mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 823LM | 846LM | 851LM | 862LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb Spread Lens Solite Lens

Reflector

Matt White Matt Black Dark Chrome Matt Silver Chrome Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle




## Code No.:DQ002

| | | | | |
|---|---|---|---|---|
| Power | MAX 15W | | | |
| Voltage | 36V | | | |
| Current | 350mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1234LM | 1257M | 1286LM | 1297LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb Spread Lens Solite Lens

Reflector

Matt White Matt Black Dark Chrome Matt Silver Chrome Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



SCR Dimming 0-10V Dimming DALI Dimming Bluetooth Dimming Tuya Dimming High-power LED SDCM<3 CRI>90 Anti-Glare

## Code No.: DQ003

| | | | | |
|---|---|---|---|---|
| Power | MAX 20W | | | |
| Voltage | 36V | | | |
| Current | 500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1647LM | 1669LM | 1681LM | 1698LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |






Honey Comb Spread Lens Solite Lens

Reflector

Matt White Matt Black Dark Chrome Matt Silver Chrome Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.:DQ004

| | | | |
|---|---|---|---|
| Power | MAX 30W | | |
| Voltage | 36V | | |
| Current | 700mA | | |
| Angle | 15° | 24° | 36° |
| Lumen | 2462LM | 2483M | 2497LM |
| CRI | 90 | | |
| IP | 20 | | |
| Installation | Surface mounted | | |



Honey Comb Spread Lens Solite Lens

Reflector

Matt White Matt Black Dark Chrome Matt Silver Chrome Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

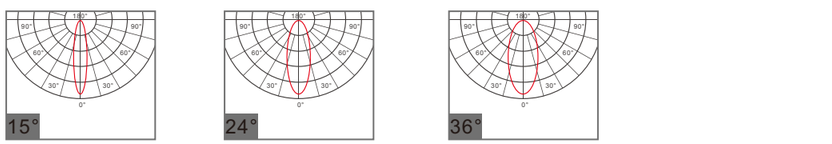

SCR Dimming 0-10V Dimming DALI Dimming Bluetooth Dimming Tuya Dimming High-power LED SDCM<3 CRI>90 Anti-Glare

## Code No.:DH104S

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 913LM | 921LM | 950LM | 982LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DH104

| | |
|---|---|
| Power | MAX 12W |
| Voltage | 36V |
| Current | 300mA |
| Angle | 60° |
| Lumen | 987LM |
| CRI | 90 |
| IP | 20 |
| Installation | Surface mounted |



Gloss Black Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

## Code No.:DH105

| | |
|---|---|
| Power | MAX 20W |
| Voltage | 36V |
| Current | 500mA |
| Angle | 60° |
| Lumen | 1670LM |
| CRI | 90 |
| IP | 20 |
| Installation | Surface mounted |




Reflector

Gloss Black Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

## Code No.:DH105S

| | | | | |
|---|---|---|---|---|
| Power | MAX 20W | | | |
| Voltage | 36V | | | |
| Current | 500mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1558LM | 1577LM | 1585LM | 1609LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DH106

| | |
|---|---|
| Power | MAX 30W |
| Voltage | 36V |
| Current | 700mA |
| Angle | 60° |
| Lumen | 2650LM |
| CRI | 90 |
| IP | 20 |
| Installation | Surface mounted |




Reflector

Gloss Black Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

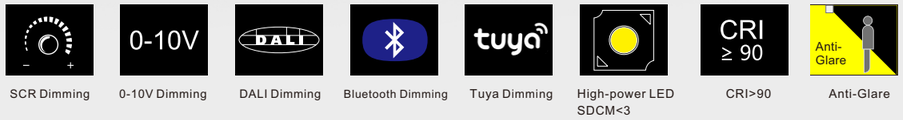

## Code No.:DH106S

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 919LM | 928LM | 956LM | 988LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb Spread Lens Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle




## Code No.:DH126S

| | | | | |
|---|---|---|---|---|
| Power | MAX 2*12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 919LM | 928LM | 956LM | 988LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb Spread Lens Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

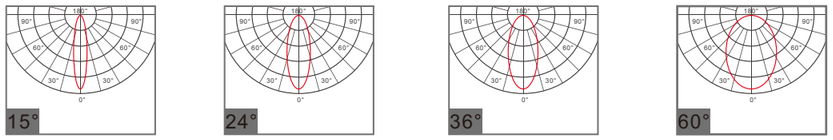

## Code No.:DH136S

| | | | | |
|---|---|---|---|---|
| Power | MAX 3*12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 919LM | 928LM | 956LM | 988LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle















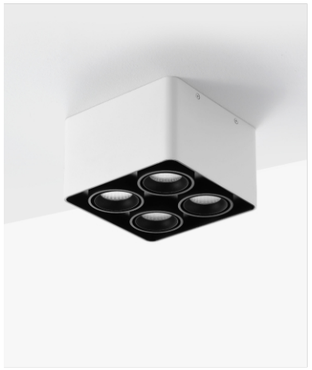

## Code No.:DH146S

| | | | | |
|---|---|---|---|---|
| Power | MAX 4*12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 919LM | 928LM | 956LM | 988LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle












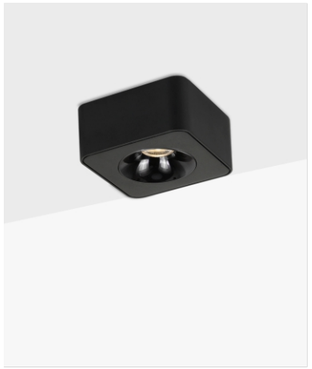

## Code No.:DH107S

| | | | | |
|---|---|---|---|---|
| Power | MAX 12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 902LM | 908LM | 926LM | 938LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |




Reflector

Matt Black Dark Chrome Matt White Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

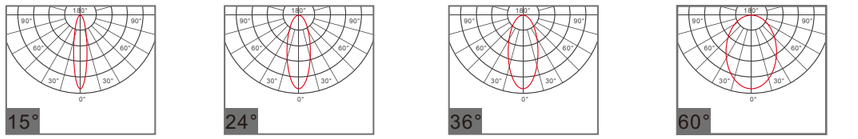

## Code No.:DH137S

| | | | | |
|---|---|---|---|---|
| Power | MAX 3*12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 902LM | 908LM | 926LM | 938LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |



Matt Black Dark Chrome Matt White Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

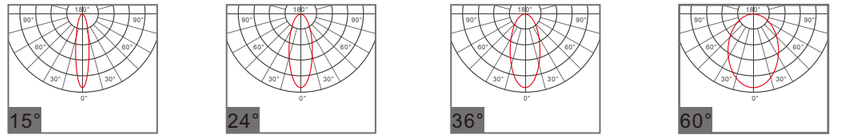


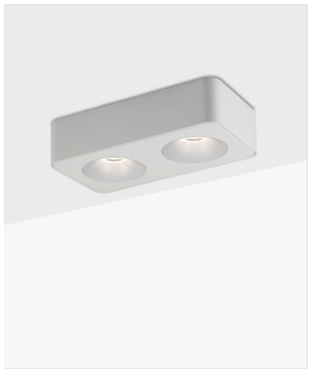

## Code No.:DH127S

| | | | | |
|---|---|---|---|---|
| Power | MAX 2*12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 902LM | 908LM | 926LM | 938LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |




Reflector

Matt Black Dark Chrome Matt White Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

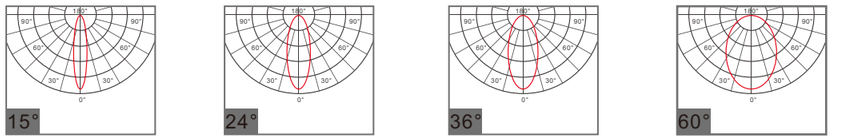

## Code No.:DH147S

| | | | | |
|---|---|---|---|---|
| Power | MAX 4*12W | | | |
| Voltage | 36V | | | |
| Current | 300mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 902LM | 908LM | 926LM | 938LM |
| CRI | 90 | | | |
| IP | 20 | | | |
| Installation | Surface mounted | | | |




Reflector

Matt Black Dark Chrome Matt White Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



# IP54

Rich lineup of IP54 allows continuous spatial design from interior to under-eaves

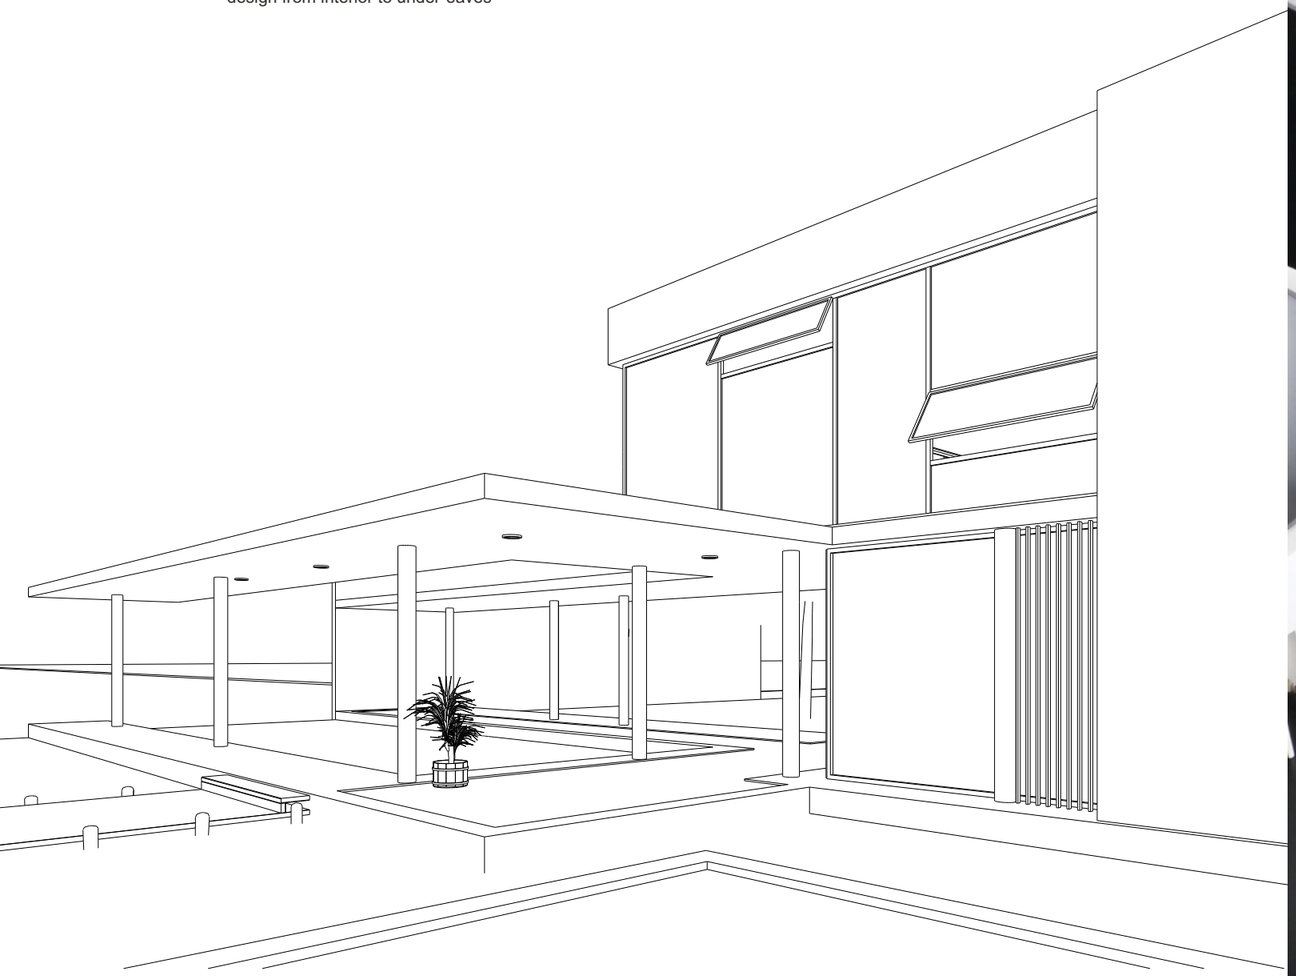

SCR Dimming

0-10V Dimming

DALI Dimming

Bluetooth Dimming

Tuya Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

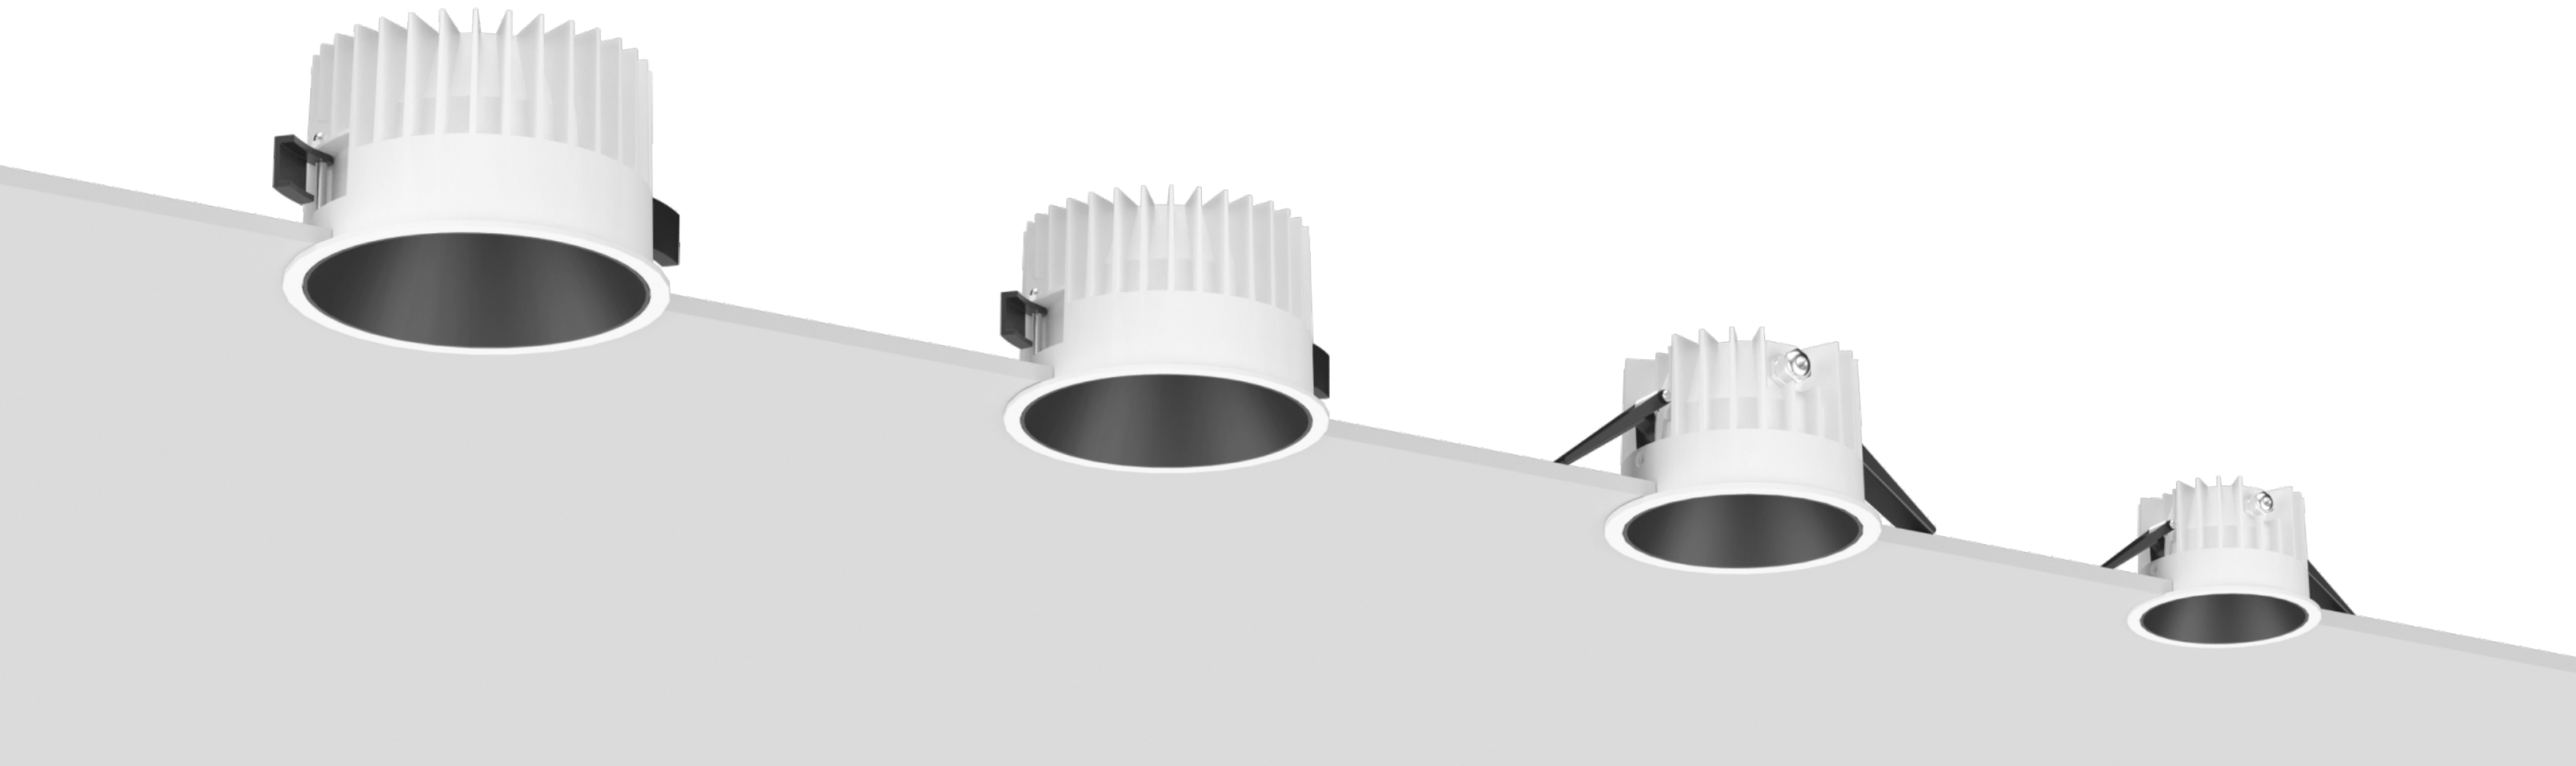

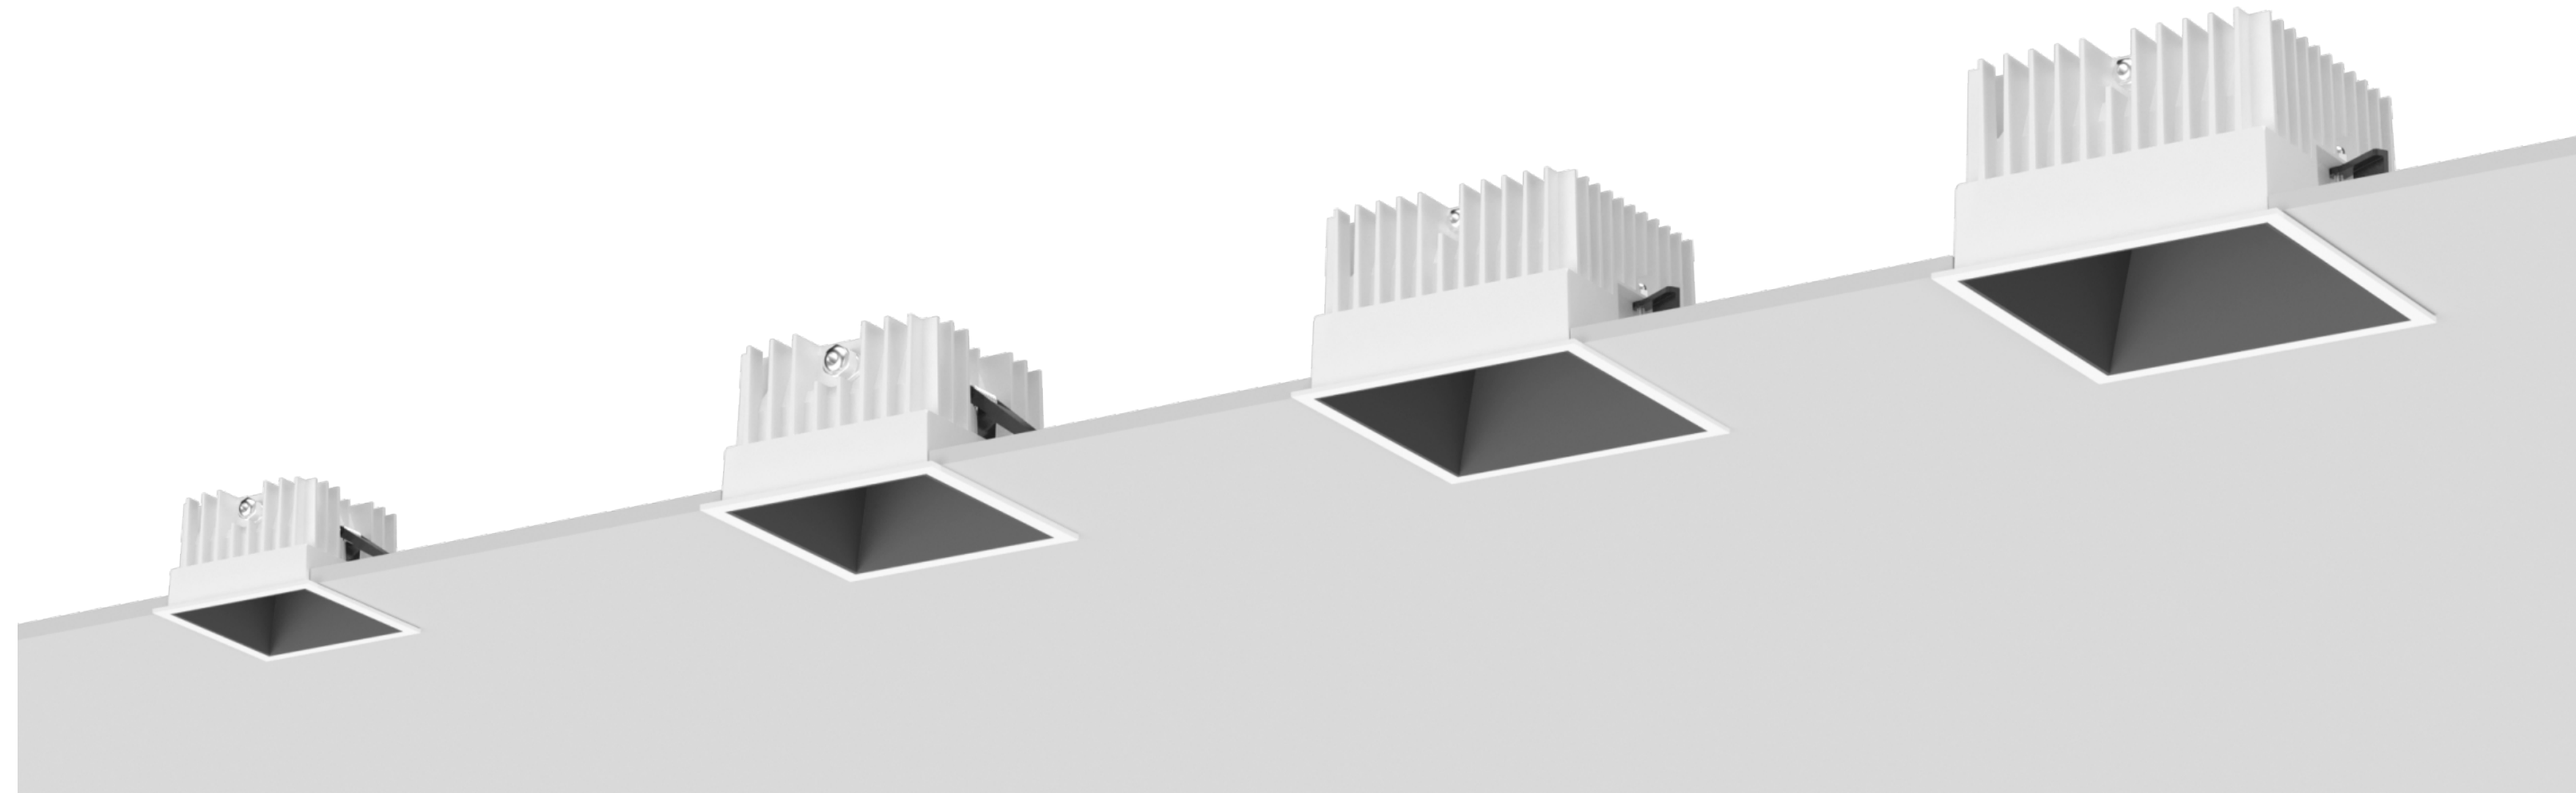

## Code No.: DN002

| | |
|---|---|
| Power | MAX 18W |
| Voltage | 36V |
| Current | 450mA |
| Angle | 15° 24° 36° 60° |
| Lumen | 1530LM 1563LM 1582LM 1596LM |
| CRI | 90 |
| IP | 54 |
| Installation | Embedded |




Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle






## Code No.:DN003

| | |
|---|---|
| Power | MAX 25W |
| Voltage | 36V |
| Current | 600mA |
| Angle | 15° 24° 36° 60° |
| Lumen | 2150LM 2180M 2230LM 2280LM |
| CRI | 90 |
| IP | 54 |
| Installation | Embedded |




Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



## Code No.: DN004

| | |
|---|---|
| Power | MAX 35W |
| Voltage | 36V |
| Current | 800mA |
| Angle | 15° 24° 36° 60° |
| Lumen | 3150LM 3210LM 3240LM 3265LM |
| CRI | 90 |
| IP | 54 |
| Installation | Embedded |




Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

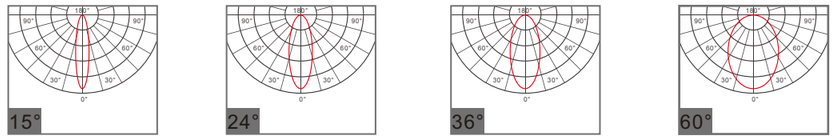

## Code No.:DN005

| | |
|---|---|
| Power | MAX 45W |
| Voltage | 36V |
| Current | 1050mA |
| Angle | 15° 24° 36° 60° |
| Lumen | 4050LM 4120LM 4170LM 4193LM |
| CRI | 90 |
| IP | 54 |
| Installation | Embedded |




Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



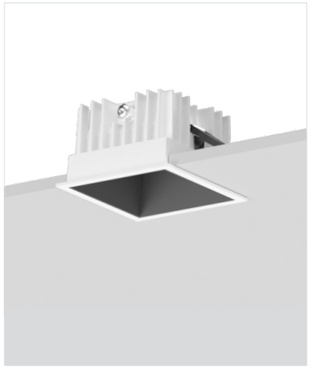

## Code No.: DN002S

| | | | | |
|---|---|---|---|---|
| Power | MAX 18W | | | |
| Voltage | 36V | | | |
| Current | 450mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 1553LM | 1585LM | 1611LM | 1637LM |
| CRI | 90 | | | |
| IP | 54 | | | |
| Installation | Embedded | | | |




Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle




## Code No.: DN003S

| | | | | |
|---|---|---|---|---|
| Power | MAX 25W | | | |
| Voltage | 36V | | | |
| Current | 600mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 2155LM | 2187M | 2232LM | 2288LM |
| CRI | 90 | | | |
| IP | 54 | | | |
| Installation | Embedded | | | |



Honey Comb Spread Lens Solite Lens

Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle




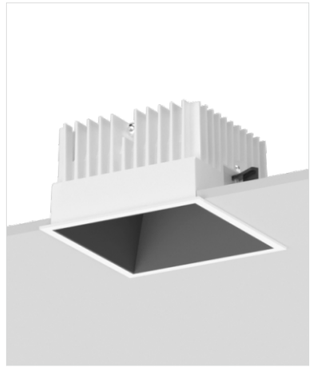

## Code No.: DN004S

| | | | | |
|---|---|---|---|---|
| Power | MAX 35W | | | |
| Voltage | 36V | | | |
| Current | 800mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 3153LM | 3216LM | 3242LM | 3269LM |
| CRI | 90 | | | |
| IP | 54 | | | |
| Installation | Embedded | | | |




Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle




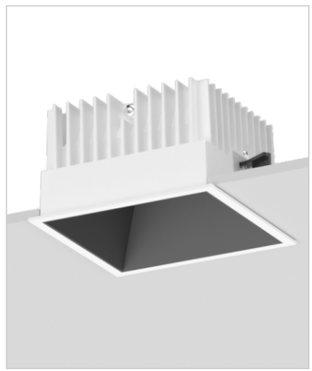

## Code No.: DN005S

| | | | | |
|---|---|---|---|---|
| Power | MAX 45W | | | |
| Voltage | 36V | | | |
| Current | 1050mA | | | |
| Angle | 15° | 24° | 36° | 60° |
| Lumen | 4054LM | 4126LM | 4171LM | 4197LM |
| CRI | 90 | | | |
| IP | 54 | | | |
| Installation | Embedded | | | |




Reflector



Matt White Matt Black Matt Silver Matt Gold

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



# REFLECTORS OF DIFFERENT COLORS




SCR Dimming | 0-10V Dimming | DALI Dimming | Bluetooth Dimming | Tuya Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

## Code No.: DP001

| | |
|---|---|
| Power | MAX 10W |
| Voltage | 36V |
| Current | 250mA |
| Angle | 24° 60° |
| Lumen | 780LM 820LM |
| CRI | 90 |
| IP | 54 |
| Installation | Embedded |



Honey Comb | Spread Lens | Solite Lens

Reflector

Matt White | Matt Silver | Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

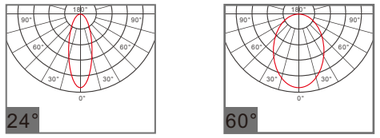


## Code No.: DP002

| | |
|---|---|
| Power | MAX 15W |
| Voltage | 36V |
| Current | 350mA |
| Angle | 24° 60° |
| Lumen | 1200LM 1270LM |
| CRI | 90 |
| IP | 54 |
| Installation | Embedded |



Honey Comb | Spread Lens | Solite Lens

Reflector

Matt White | Matt Silver | Chrome

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

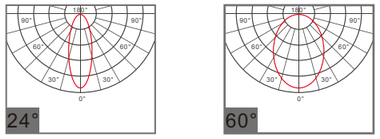

## Code No.: DP003

| | | |
|---|---|---|
| Power | MAX 25W | |
| Voltage | 36V | |
| Current | 600mA | |
| Angle | 24° | 60° |
| Lumen | 2070LM | 2130LM |
| CRI | 90 | |
| IP | 54 | |
| Installation | Embedded | |



### Reflector

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

### Angle

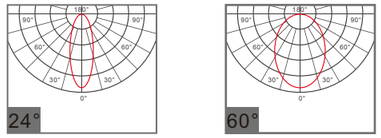

## Code No.: DP005

| | | |
|---|---|---|
| Power | MAX 45W | |
| Voltage | 36V | |
| Current | 1050mA | |
| Angle | 24° | 60° |
| Lumen | 3600LM | 3670LM |
| CRI | 90 | |
| IP | 54 | |
| Installation | Embedded | |



### Reflector

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

### Angle

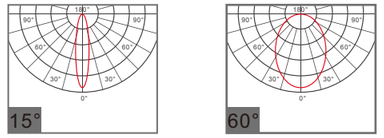

## Code No.:DP004

| | | |
|---|---|---|
| Power | MAX 35W | |
| Voltage | 36V | |
| Current | 800mA | |
| Angle | 24° | 60° |
| Lumen | 2810LM | 2890LM |
| CRI | 90 | |
| IP | 54 | |
| Installation | Embedded | |



### Reflector

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K
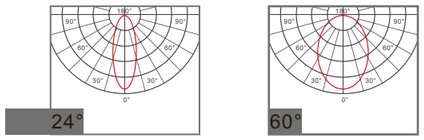
### Angle