Standard Finishes

Sandy Black

Sandy White

Special Finishes

Chrome plated

Brushed gold

SCR Dimming

0-10V Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

Code No.:TB001

Power	MAX 3W			
Voltage	36V			
Current	100mA			
Angle	15°	24°	36°	60°
Lumen	245LM	258LM	273LM	287LM
CRI	90			
IP	20			
Installation	Track Mounted			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.:TB003

Power	MAX 10W			
Voltage	36V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	818LM	829LM	853LM	865LM
CRI	90/98			
IP	20			
Installation	Track Mounted			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

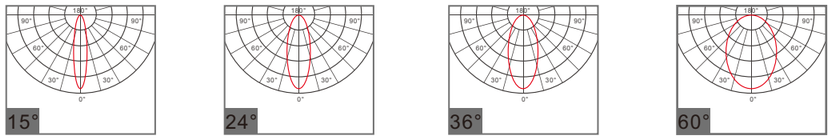

Code No.: TB002

Power	MAX 6W			
Voltage	36V			
Current	150mA			
Angle	15°	24°	36°	60°
Lumen	496LM	521M	533LM	852LM
CRI	90			
IP	20			
Installation	Track Mounted			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Standard Finishes

Sandy Black

Sandy White

Special Finishes

Chrome plated

Brushed gold

SCR Dimming

0-10V Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

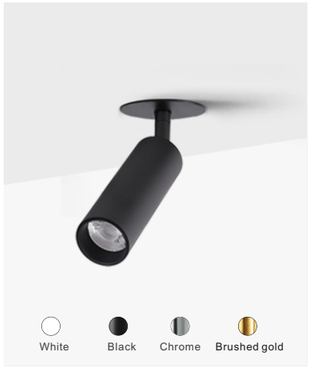

Code No.: TB001Q

Power	MAX 3W			
Voltage	36V			
Current	100mA			
Angle	15°	24°	36°	60°
Lumen	245LM	258LM	273LM	287LM
CRI	90			
IP	20			
Installation	Embedded			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.:TB003Q

Power	MAX 10W			
Voltage	36V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	818LM	829LM	853LM	865LM
CRI	90			
IP	20			
Installation	Embedded			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



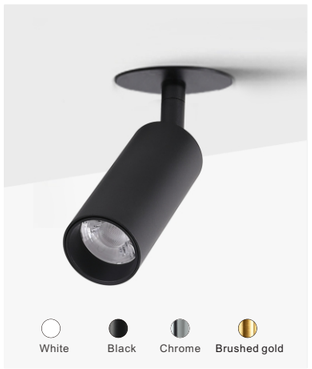

Code No.: TB002Q

Power	MAX 6W			
Voltage	36V			
Current	150mA			
Angle	15°	24°	36°	60°
Lumen	496LM	521M	533LM	852LM
CRI	90			
IP	20			
Installation	Embedded			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



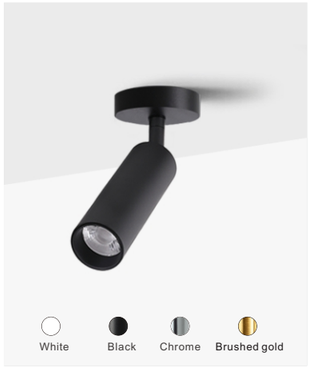

Code No.: TB001M

Power	MAX 3W			
Voltage	36V			
Current	100mA			
Angle	15°	24°	36°	60°
Lumen	245LM	258LM	273LM	287LM
CRI	90			
IP	20			
Installation	Surface mounted			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.: TB003M

Power	MAX 10W			
Voltage	36V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	818LM	829LM	853LM	865LM
CRI	90			
IP	20			
Installation	Surface mounted			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



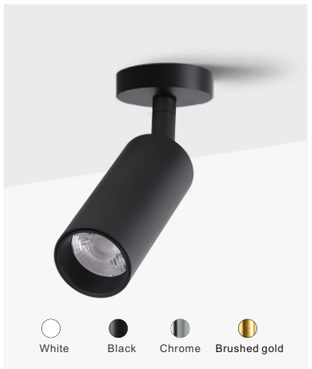

Code No.: TB002M

Power	MAX 6W			
Voltage	36V			
Current	150mA			
Angle	15°	24°	36°	60°
Lumen	496LM	521M	533LM	852LM
CRI	90			
IP	20			
Installation	Surface mounted			



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

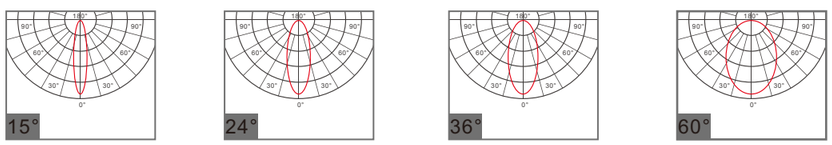

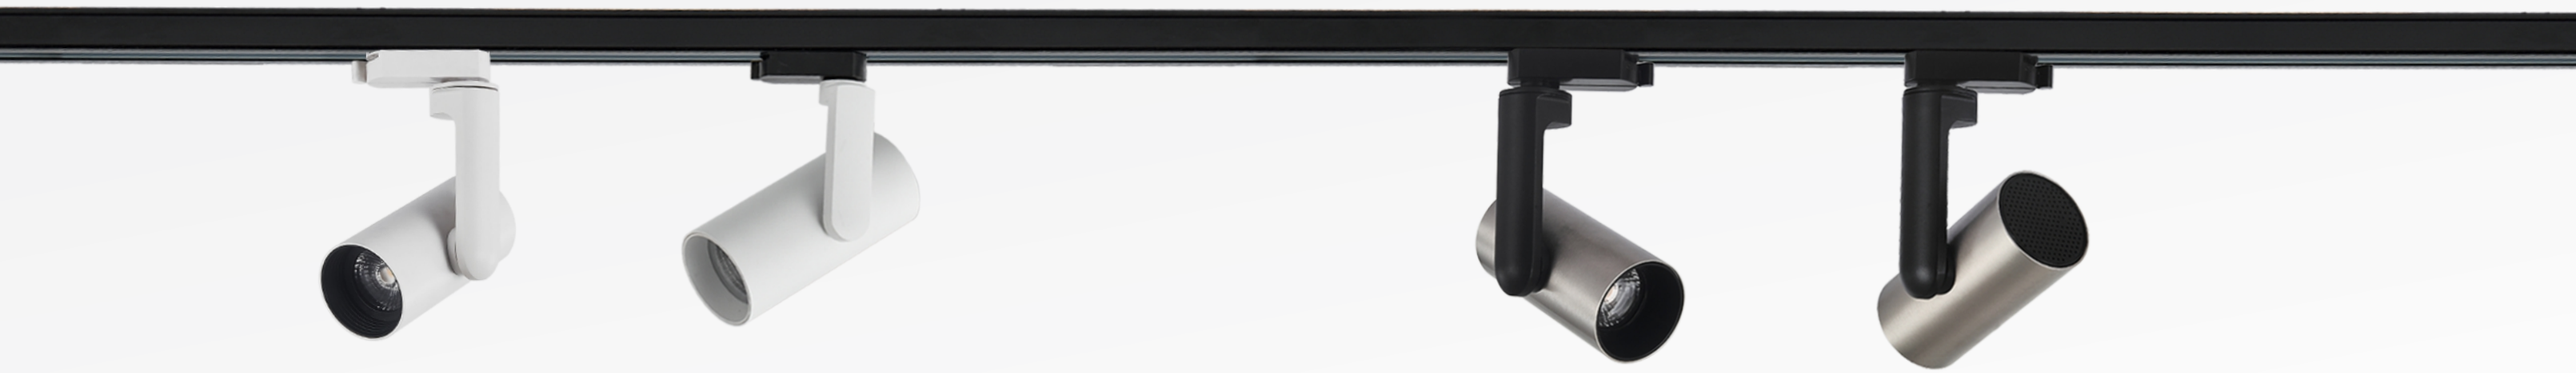

TRACK LIGHT

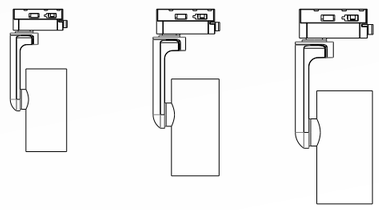

SCR Dimming | 0-10V Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

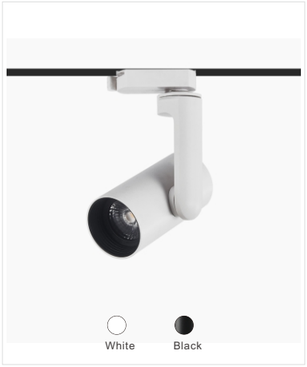

Code No.: TO001

Power	MAX 12W			
Voltage	36V			
Current	300mA			
Angle	15°	24°	36°	60°
Lumen	1056LM	1078LM	1086LM	1098LM
CRI	90			
IP	20			
Installation	Track Mounted			



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle









Code No.: TO002

Power	MAX 20W			
Voltage	36V			
Current	500mA			
Angle	15°	24°	36°	60°
Lumen	1805LM	1826LM	1832LM	1845LM
CRI	90			
IP	20			
Installation	Track Mounted			



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle









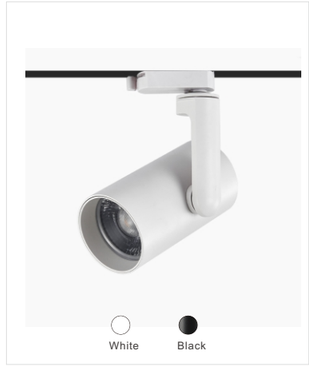

Code No.: TO003

Power	MAX 30W			
Voltage	36V			
Current	700mA			
Angle	15°	24°	36°	60°
Lumen	2712LM	2753LM	2785LM	2796LM
CRI	90			
IP	20			
Installation	Track Mounted			



Honey Comb

Spread Lens

Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle









DALI Dimming | SCR Dimming | 0-10V Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

Code No.: TM001

Power	MAX 12W
Voltage	36V
Current	300mA
Angle	15° 24° 36° 60°
Lumen	1056LM 1078LM 1086LM 1098LM
CRI	90
IP	20
Installation	Track Mounted



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.: TM002

Power	MAX 20W
Voltage	36V
Current	500mA
Angle	15° 24° 36° 60°
Lumen	1805LM 1826LM 1832LM 1845LM
CRI	90
IP	20
Installation	Track Mounted



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.: TM002-30

Power	MAX 30W			
Voltage	36V			
Current	700mA			
Angle	15°	24°	36°	60°
Lumen	2812LM	2853LM	2885LM	2896LM
CRI	90			
IP	20			
Installation	Track Mounted			



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.:TM003

Power	MAX 30W			
Voltage	36V			
Current	700mA			
Angle	15°	24°	36°	60°
Lumen	2842LM	2893LM	2925LM	2946LM
CRI	90			
IP	20			
Installation	Track Mounted			



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

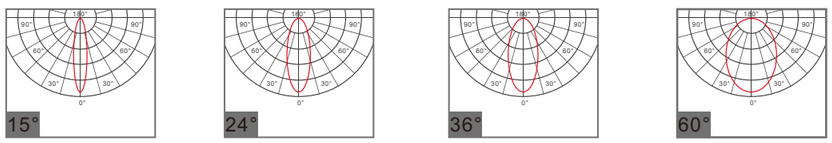

Code No.: TF002

Power	MAX 35W			
Voltage	36V			
Current	800mA			
Angle	15°	24°	36°	60°
Lumen	3150LM	2195LM	3216LM	3231LM
CRI	90			
IP	20			
Installation	Track Mounted			



White Black

Honey Comb Spread Lens Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



Code No.: TF004

Power	MAX 40W		
Voltage	36V		
Current	900mA		
Angle	15°	24°	36
Lumen	3708LM	3735LM	3752LM
CRI	90		
IP	20		
Installation	Track Mounted		



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

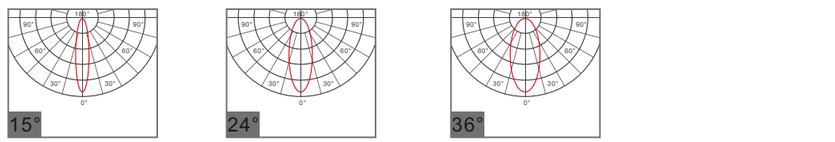

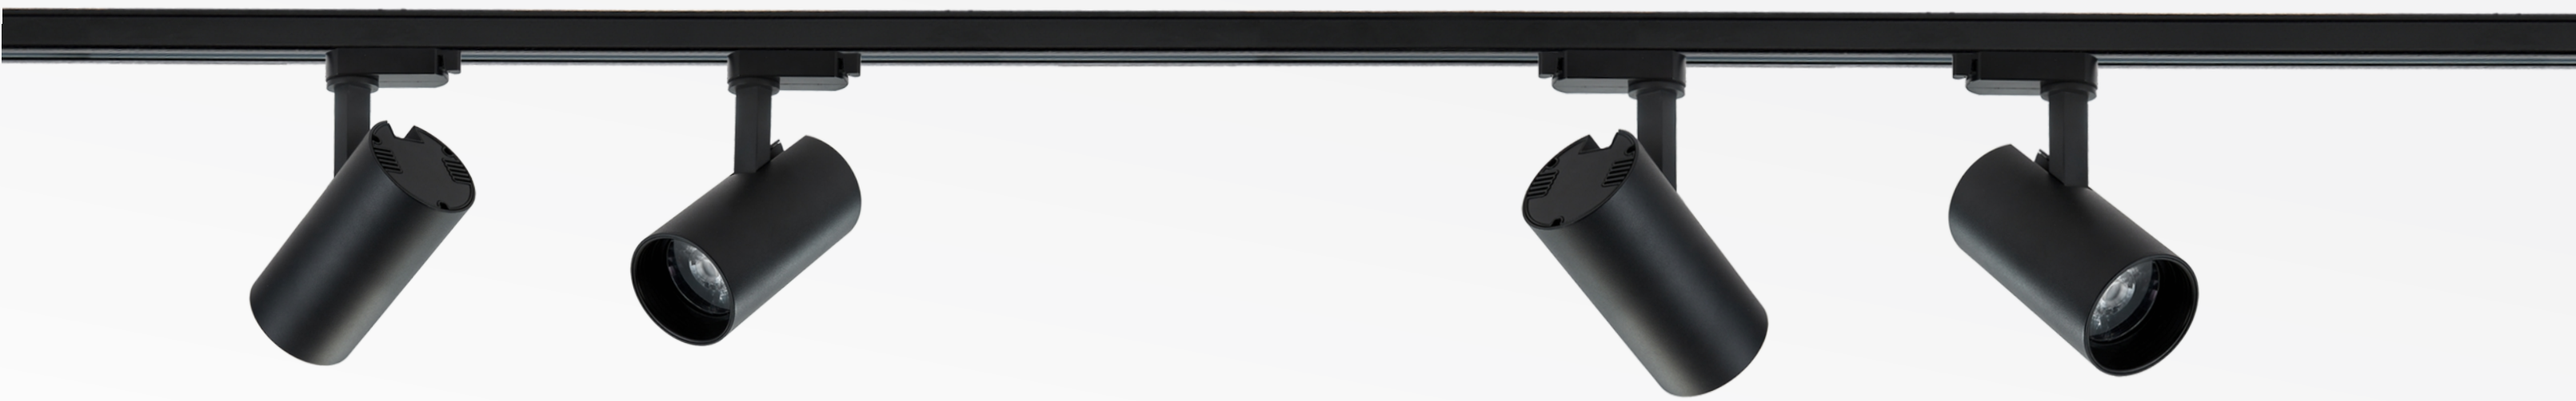

SMALLER

DALI Dimming

SCR Dimming

0-10V Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

White Black

Code No.: TB004

Power	MAX 15W
Voltage	36V
Current	350mA
Angle	15° 24° 36° 60°
Lumen	1312LM 1345LM 1362LM 1376LM
CRI	90
IP	20
Installation	Track Mounted



Honey Comb Spread Lens Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

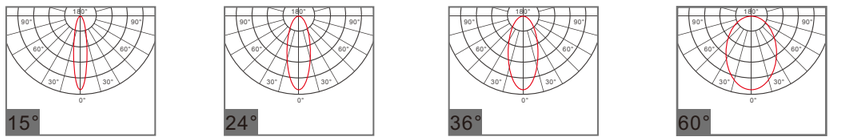

Code No.: TB005

Power	MAX 20W
Voltage	36V
Current	500mA
Angle	15° 24° 36° 60°
Lumen	1812LM 1834LM 1842LM 1853LM
CRI	90
IP	20
Installation	Track Mounted

White Black



Honey Comb Spread Lens Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

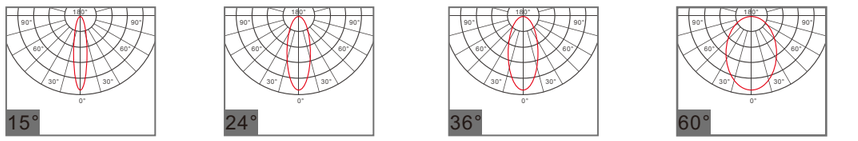

Code No.: TB006

Power	MAX 30W
Voltage	36V
Current	700mA
Angle	15° 24° 36° 60°
Lumen	2702LM 2743LM 2775LM 2786LM
CRI	90
IP	20
Installation	Track Mounted

White Black



Honey Comb Spread Lens Solite Lens

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle



TRACK LIGHT

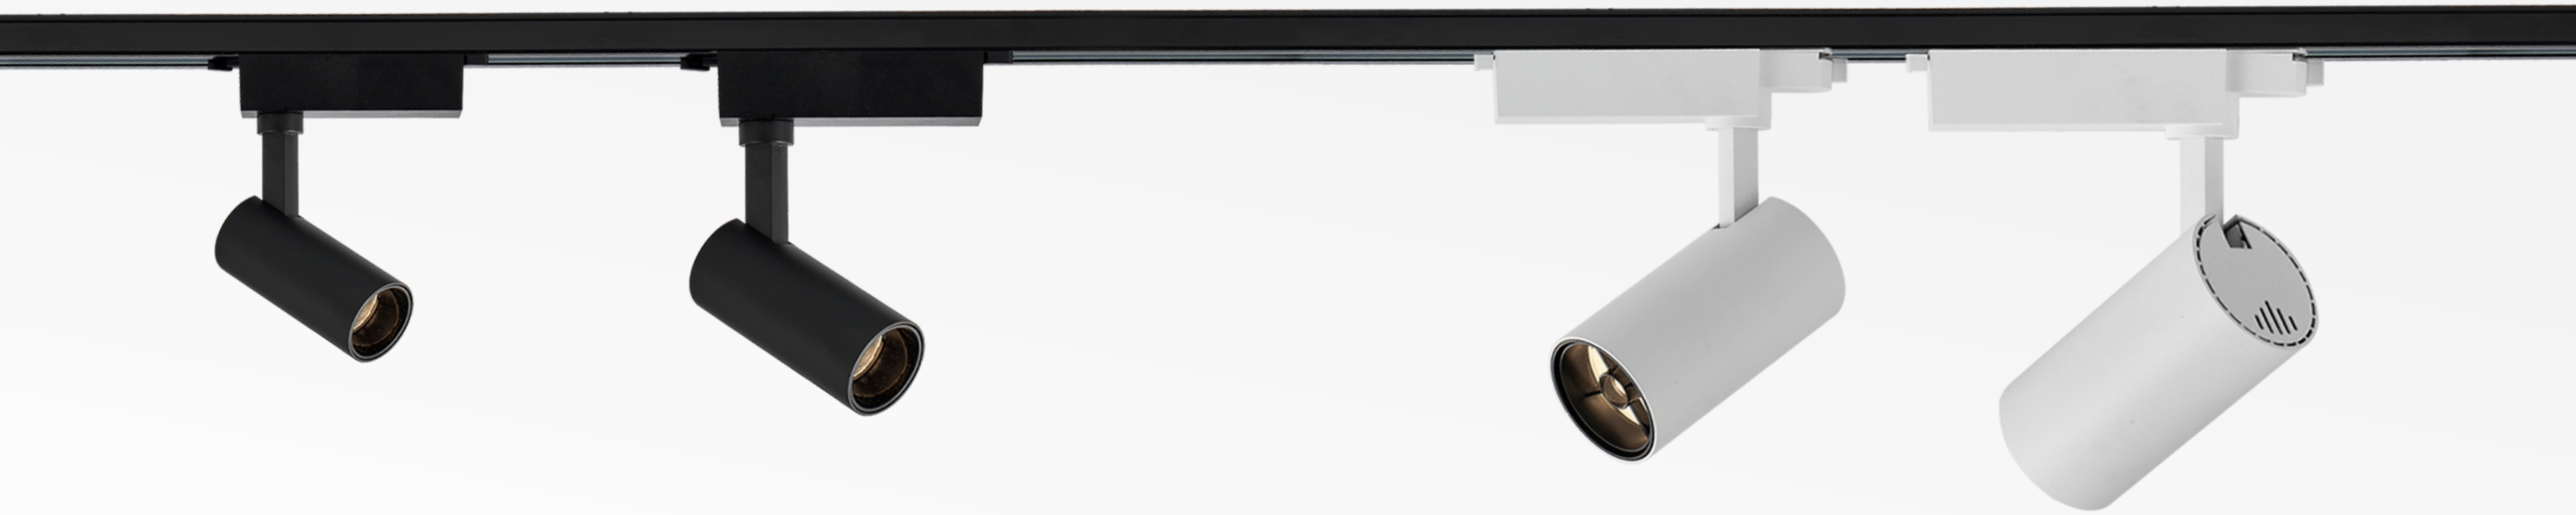

SCR Dimming | 0-10V Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

Anti dazzle ring

White Black

Code No.: TA001

Power	MAX 12W		
Voltage	36V		
Current	300mA		
Angle	15°	24°	36°
Lumen	1068LM	1085LM	1096LM
CRI	90		
IP	20		
Installation	Track Mounted		



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

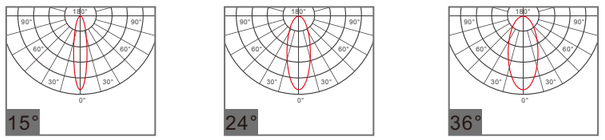

White Black

Code No.: TA002

Power	MAX 15W		
Voltage	36V		
Current	350mA		
Angle	15°	24°	36°
Lumen	1282LM	1325LM	1342LM
CRI	90		
IP	20		
Installation	Track Mounted		



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

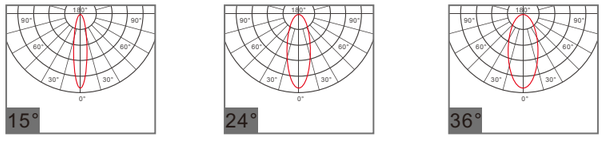

White Black

Code No.: TA003

Power	MAX 25W		
Voltage	36V		
Current	600mA		
Angle	15°	24°	36°
Lumen	2136LM	2162LM	2179LM
CRI	90		
IP	20		
Installation	Track Mounted		



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

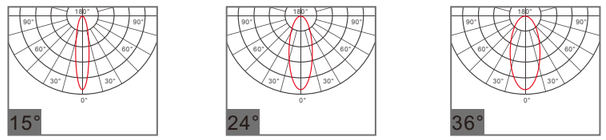

White Black

Code No.: TA004

Power	MAX 35W		
Voltage	36V		
Current	800mA		
Angle	15°	24°	36°
Lumen	2780LM	2825LM	2841LM
CRI	90		
IP	20		
Installation	Track Mounted		



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

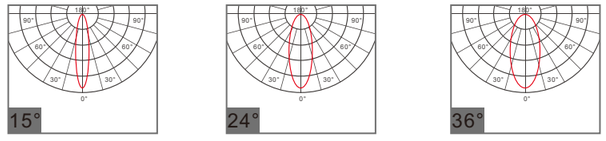

SCR Dimming | 0-10V Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

Code No.: TE001

Power	MAX 15W			
Voltage	36V			
Current	350mA			
Angle	15°	24°	36°	60°
Lumen	1282LM	1325LM	1342LM	1358LM
CRI	90			
IP	20			
Installation	Track Mounted			



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

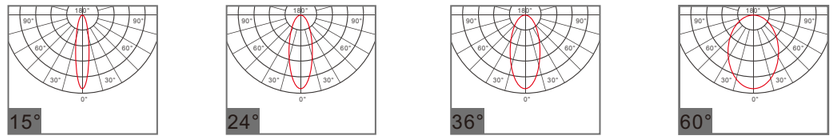

Code No.:TE003

Power	MAX 35W			
Voltage	36V			
Current	800mA			
Angle	15°	24°	36°	60°
Lumen	2780LM	2825LM	2841LM	2867LM
CRI	90			
IP	20			
Installation	Track Mounted			



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

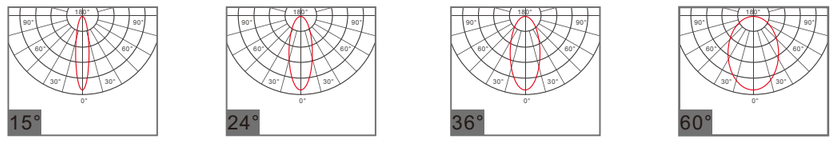

SCR Dimming

0-10V Dimming

High-power LED
SDCM<3

CRI>90

Anti-Glare

Code No.: TC001

Power	MAX 12W
Voltage	36V
Current	300mA
Angle	15° 24° 36°
Lumen	916LM 925LM 953LM
CRI	90
IP	20
Installation	Track Mounted



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

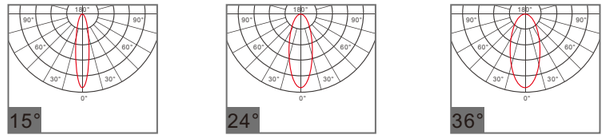

Code No.: TC002

Power	MAX 25W
Voltage	36V
Current	600mA
Angle	15° 24° 36°
Lumen	1815LM 1836LM 1842LM
CRI	90
IP	20
Installation	Track Mounted



White Black

PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

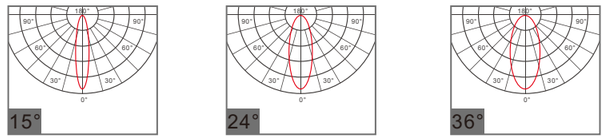

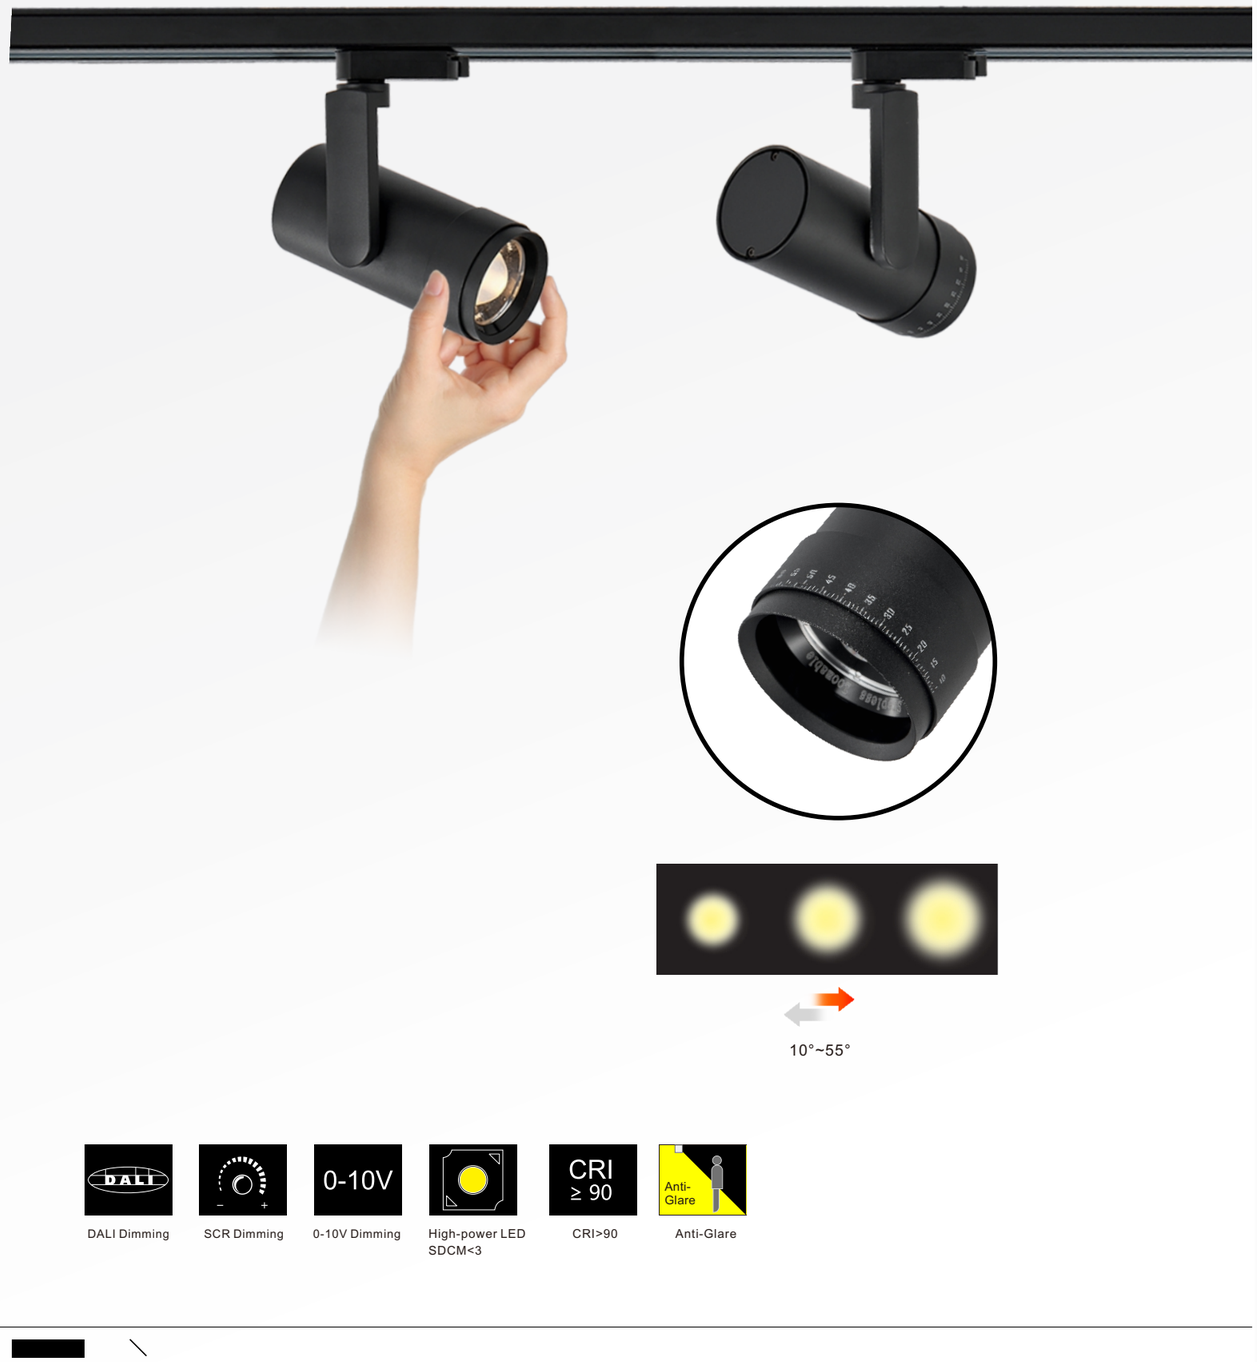

DALI Dimming | SCR Dimming | 0-10V Dimming | High-power LED SDCM<3 | CRI>90 | Anti-Glare

Code No.: TG001

Power	MAX 15W
Voltage	36V
Current	350mA
Angle	10° ~55°
Lumen	1213LM~1337LM
CRI	90
IP	20
Installation	Track Mounted



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

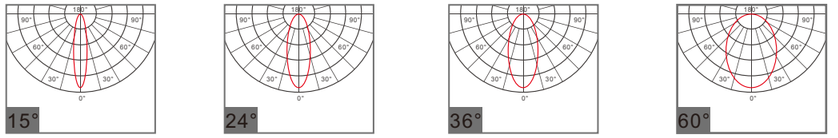

Code No.: TG002

Power	MAX 25W
Voltage	36V
Current	600mA
Angle	10° ~ 55°
Lumen	2078LM~2210LM
CRI	90
IP	20
Installation	Track Mounted



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K
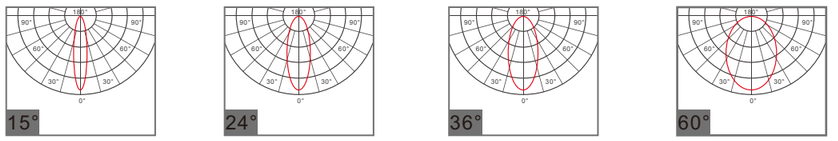
Angle